
ASSEMBLY AND INSTALLATION INSTRUCTIONS


H0275

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THIS INSTRUCTION.

Hardware Package(inculded):

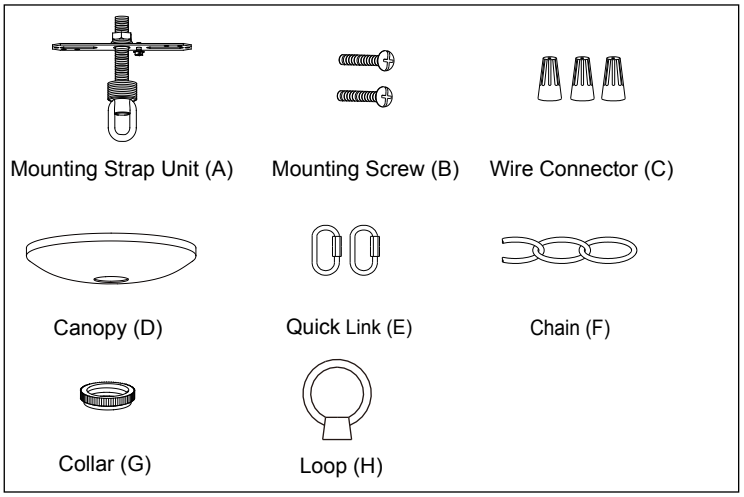

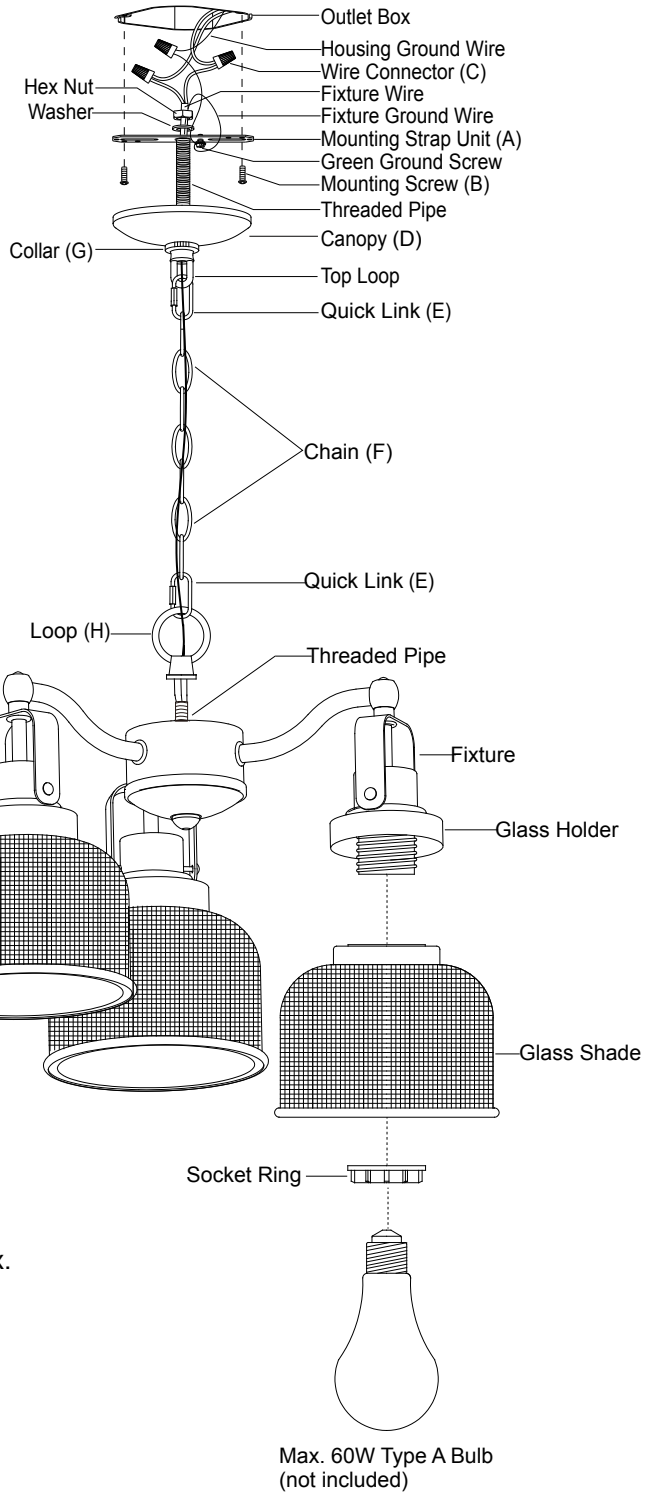

Installation Steps

Turn off the power at fuse or circuit box.

1. Attach the mounting strap unit (A) to the outlet box using two mounting screws (B).

2. Install loop (H) on the threaded pipe with the fixture.

3. Choose the length of the chain (F) you needed, then weave the fixture wire and the fixture ground wire through the chain (F) , collar (G) and canopy (D).

4. Connect the chain (F) to the loop (H) and the top loop on mounting strap unit (A) with two quick links (E).

5. Thread the fixture wire and fixture ground wire through the top loop, threaded pipe of the mounting strap unit (A).

6. Pull out the outlet wires and house ground wire from the outlet box. Make wire connections using the wire connectors (C):
   ---The smooth wire (marked) from the fixture to the brown wire from the power source.
   ---The ribbed wire (unmarked) from the fixture to the brown wire from the power source.
   ---Attach the fixture ground wire to the mounting strap unit (A) with the green ground screw, then connect it to the house ground wire with a wire connector (C).
   Carefully put the wires back into the outlet box.

7. Attach the canopy (D) to the mounting strap unit (A) by inserting the top loop, then tighten the collar (G) to secure it.

VAXCEL

220907


8. Attach the glass shades to the glass holders, then secure them with the socket rings.


9. Install 3 x 60W max. meduim base bulbs (not included). See relamping label at socket area or packaging for maximum wattage allowed.

Turn on the power at fuse or circuit box.

The following parts are available for re-order if damaged or missing.

Spare Parts List:

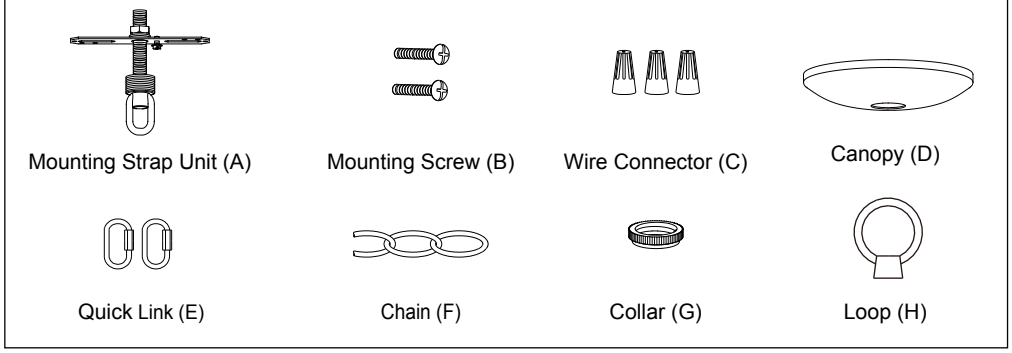

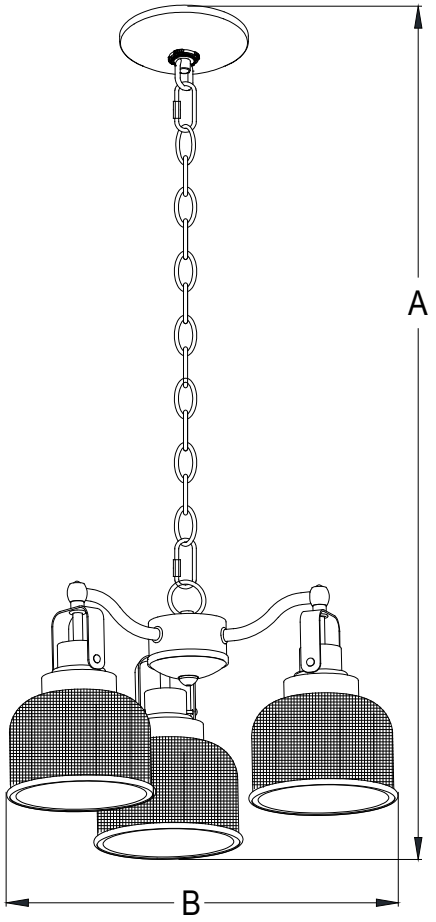

A: 8-1/2"~50-1/4"

B: 16-1/2"

VAXCEL

220907