


ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0321

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.

Hardware Package (included):

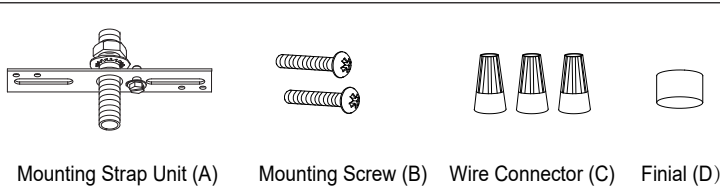


Installation Steps

Turn off the power at fuse or circuit box.

1. Attach the mounting strap unit (A) to the outlet box by using two mounting screws (B).
2. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
 - Connect the hot wire (black insulation) from the fixture to the black wire from the power source.
 - Connect the neutral wire (white insulation) from the fixture to the white wire from the power source.
 - Attach the fixture ground wire (bare wire) to the mounting strap unit (A) with the green ground screw. Then, depending on local code, connect it to the house ground wire with the wire connector (C). Carefully put all of the wires back into the outlet box.
3. Remove the finial (D) from the mounting strap unit (A).
4. Attach the ceiling pan to the mounting strap unit (A) by inserting threaded pipe into the center hole the ceiling pan and secure it with the finial (D).
NOTE: Depth of threaded pipe may need to be adjusted to properly fit the finial.
5. Hang the crystal prism onto the ceiling pan from the inside out.
6. Install 3 x 60W Max. candelabra base bulbs (not included).
See relamping label at socket area or packaging for maximum wattage allowed.


Turn on the power at fuse or circuit box.

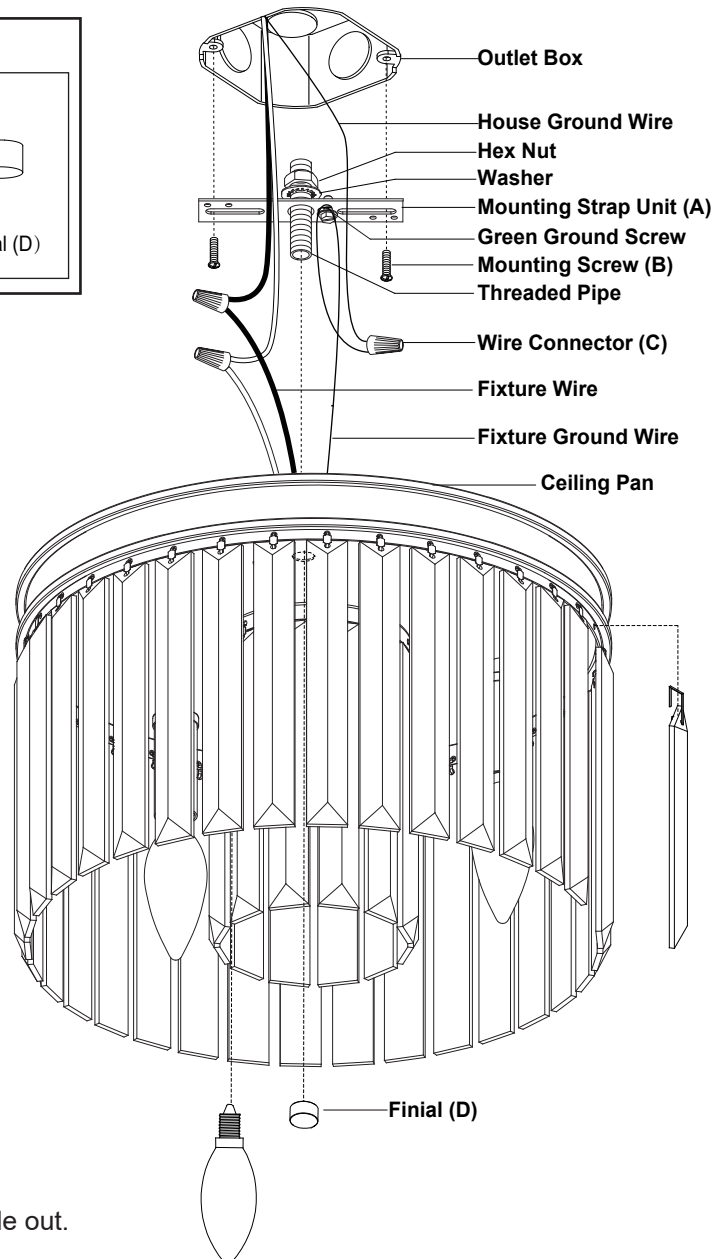

Max. 60W Candelabra base bulb (not included)

The following parts are available for reorder if damaged or missing.

Spare Parts List:




Mounting Strap Unit (A) Mounting Screw (B) Wire Connector (C) Finial (D)

Assembly Kit
7012MM (1 SET)



Crystal Prism
10491CP

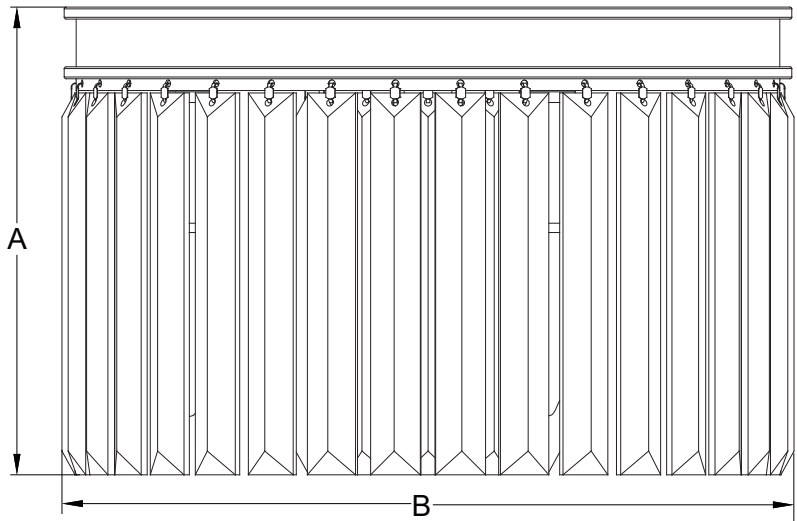

A: 7-3/4"

B: 12"

1 Year Warranty

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

Exclusions: This warranty does not include the failure of products from extreme acts of nature; environmental conditions not suited for the products intended use; operation in temperatures outside of the range specified in the instruction manual; usage with improper power supply, power surges or dips. For coastal locations, some corrosion is considered normal for the environment.

Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.

How can warranty service be obtained?
info@vaxcel.com
1-800-482-9235