ASSEMBLY AND INSTALLATION INSTRUCTIONS

PD55424 / PD55524 / PD55624 / PD55724

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Fixing the silhouette:

1. Take out the silhouettes from the package carefully. Loosen the set screws, but do not unscrew the set screws to prevent them lost.
2. Insert the silhouette to the metal ring, and then fix it toward to the metal ring with the set screw. (See Fig.1)
3. Repeat Step 2 to finish all the silhouettes fixing.
   1. The end caps divide the silhouettes fixing into four equal divisions. (See Fig.2)
   2. Please according to Fig.2 shown to fix all the silhouettes whichever you fix first.
4. You can install the silhouettes which marked P-R (for PD55424) or marked P-S (for PD55724) or marked P-C & P-B (for PD55524) to the location of silhouettes which marked P-E (for PD55624) shown in Figure 2 to replace them.




Fig.1



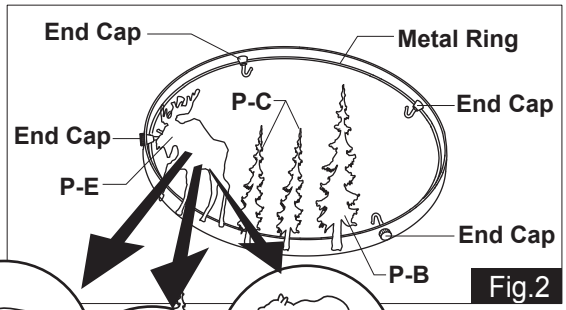


Fig.2

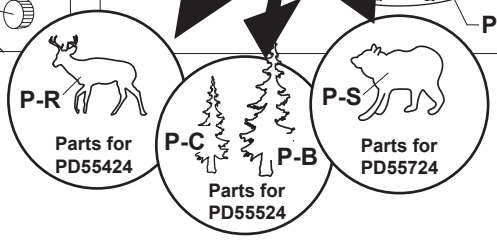

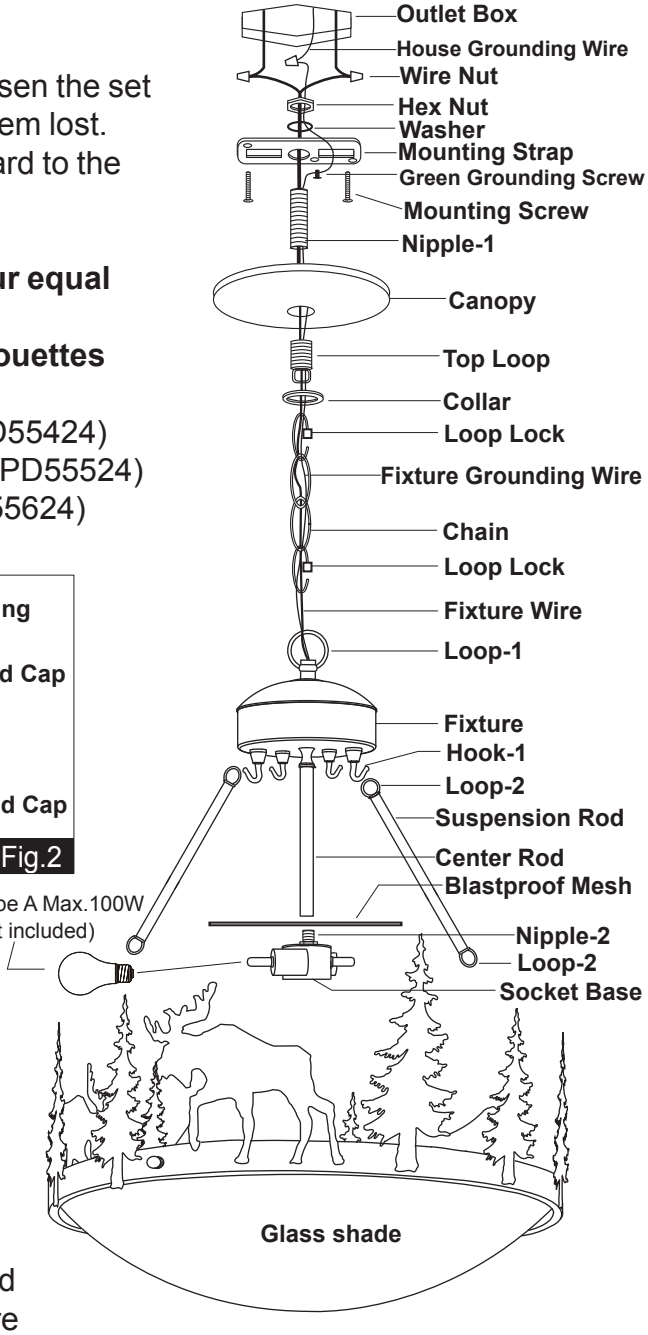

Install the Pendant:

1. Attach the nipple-1 to the mounting strap, and then secure it with a washer and a hex nut.
2. Attach the mounting strap to the outlet box by using two mounting screws.
3. Choose the certain length of the chain that you need, and then weave the fixture wire and the fixture grounding wire through the chain. Then connect one end link of the chain and the loop-1 by using the loop lock.
4. Secure the top loop to the nipple-1 tightly.
5. Thread the fixture wire and fixture grounding wire through the collar, canopy, top loop, nipple-1 and mounting strap in order.
6. Connect the link on the other end of the chain and the top loop by using the loop lock.




Fig.3

vaxcel

110319

7. Pull out the outlet wires and house grounding wire from the outlet box. Make wire connections using the wire nuts:
   ---The smooth wire (marked) from the fixture to the black wire from the power source.
   ---The ridged wire (unmarked) from the fixture to the white wire from the power source.
   ---Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.
   Carefully put the wires back into the outlet box.
8. Attach the canopy to the mounting strap by inserting the top loop, then secure it with the collar.
9. Attach the blastproof mesh onto the socket base by inserting the nipple-2, and then secure it with the center rod.
10. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
11. Hook one end of the suspension rods to the hook-1, and then hook the other end of the suspension rods to the hook-2. (See Fig.3)
    Note: Make sure all the four suspension rods hook tightly each hook-1 and hook-2 one by one.
12. Turn on the power at the main fuse or circuit breaker box.