ASSEMBLY AND INSTALLATION INSTRUCTIONS


WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.
NOTE: We have the bar(sold separately) , to add your single pendant to three-piece pendant at your option.

Installation Steps

For Single Pendant:


1. Insert two screws to the mounting strap.
2. Attach the mounting strap to ceiling box by using two mounting screws.
3. Rod connection:
   a. Thread the fixture wire from the glass holder through the dow rod (w/o nipple), and then attach the down rod to the glass holder by using the nipple.
   b. Thread the fixture wire from the down rod through the middle rod (w/ nipple) and then secure the middle rod with the nipple.
   c. Thread the fixture wire through the upper rod(w/ nipple), and then secure the upper rod with the nipple.
   *The height of light fixture can be adjustableyourself by using upper / middle rod or not at your option.
4. Thread the fixture wire through the set nipple and the canopy, and then secure the upper rod to the canopy with the set nipple.
5. Make wire connections with wire nuts:
   ---The black wire from fixture to the black wire from power source.
   ---The white wire from fixture to the white wire from power source.
   ---Attach the fixture grounding wire to the mounting strap with the green grounding screw.Then connect it to the house grounding wire with the wire nut.
   Carefully tuck wires back into the ceiling box.
6. Attach the canopy to the mounting strap by inserting the screws, and then secure with the two bolt nuts.
7. Attach the glass shade to the glass holder, and then secure with the socket ring.
8. Install a bulb.**(Please do not exceed the maximum capacity, that is recommended on the socket)**
9. Turn power on at fuse or circuit box.

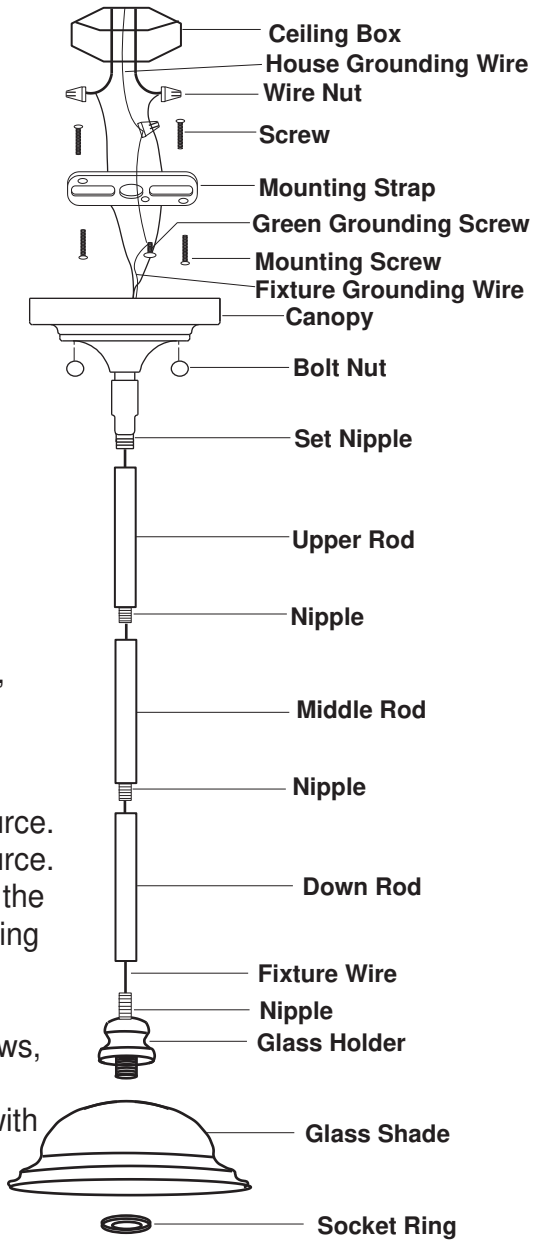



VAXCEL LIGHTING
050718

For Three-piece Pendant:

1. Dismantle the single pendant of its canopy one by one.Unscrew the hex nut by the wrench, then remove the hex nut, washer , grounding tab, metal pad and set nipple from the canopy. (See Fig.1)
2. Unscrew the set screws from bar.
3. Insert the fixed side of the set nipples to the middle hole of the bar. Then secure with metal pad, grounding tab, washer, hex nut which from the single pendant.(See Fig.2)
4. Repeat Step3 to insert the rest two pendants to the side hole of the bar.
5. Attach the canopy and the mounting plate to the ceiling: (Pull the wires from power source out for wire connecting)
   a.If the ceiling material is cement:
   Aim the middle hole of the mounting plate at the center of the ceiling box. Mark the 2 setting holes of the mounting plate on the ceiling, drill these 2 marks, and then thread the wall anchors into the 2 holes of the ceiling. Thread the wires of the power source through the canopy and the mounting plate. Attach the canopy and the mounting plate to the ceiling by threading the dry wall screws through the setting holes of the mounting plate into the wall anchors.
   b.If the ceiling material is wooden:
   Thread the wires of the power source through the canopy and the mounting plate. Attach the canopy and the mounting plate to the ceiling by threading the dry wall screws through the setting holes of the mounting plate into the ceiling.
   c. If the ceiling material is sheetrock:
   Thread the wires of the power source through the canopy and the mounting plate. Attach the canopy and the mounting plate to the ceiling by threading the small steel nails (not supplied) through the setting holes of the mounting plate into the ceiling.
6. Rod connections.See Step 3 As For Single Pendant to finish all the three single pendants one by one
7. Thread the fixture wire through the set nipple of the bar and secure the upper rod to the bar one by one.
8. Make wire connections with wire nuts:
   ---Extend both black/white wires of the 2 side pendants by the attached wires provided by the bar.
   ---All black wires from tubes to the black wire from power source.
   ---All white wires from tubes to the white wire from power source.
   ---Attach the fixture grounding wire to the mounting strap with the green grounding screw.Then connect it to the house grounding wire with the wire nut.
   Carefully tuck wires into the ceiling box.
9. Attach the bar to the mounting plate, and secure with the set screws.
10. Attach the glass shades to the glass holders, and secure with the shade rings.
11. Install bulbs.**(Please do not exceed the maximum capacity, that is recommended on the package.)**
12. Turn on the power at fuse or circuit box..

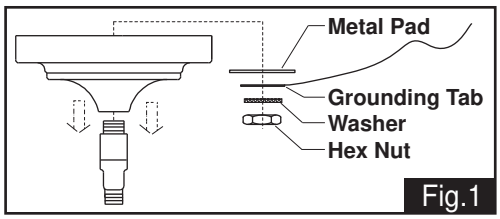

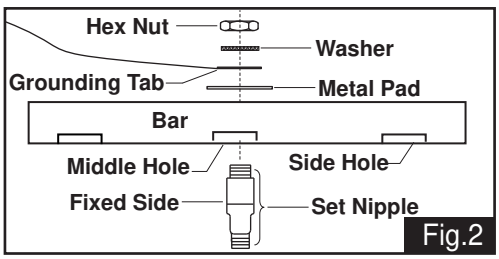

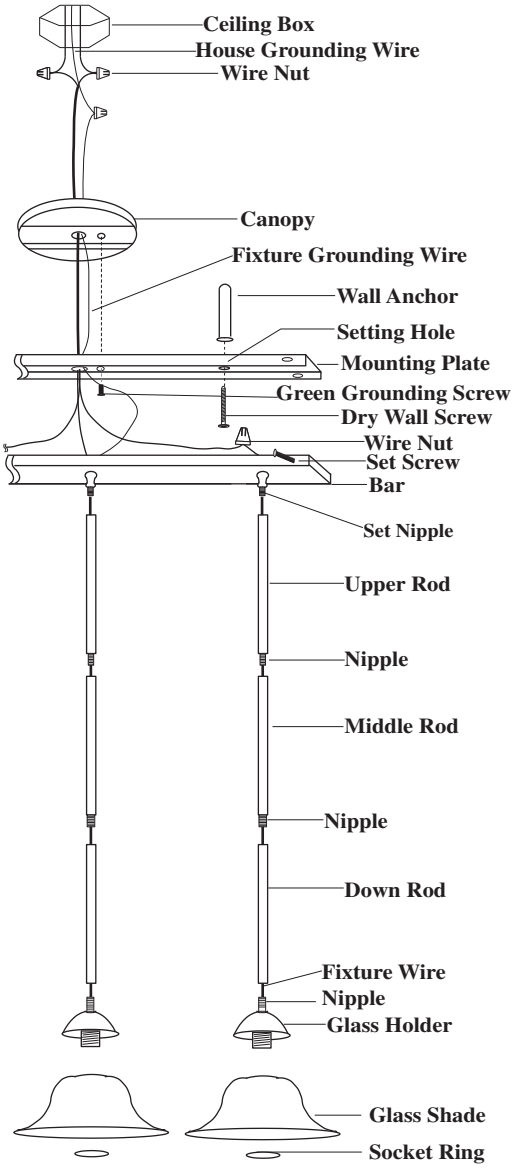

VAXCEL LIGHTING

050718