

DGC4

4" LED Recessed Gimbal

Product Description

The DGC LED Downlight Gimbal Series offers an Airtight, IC rated gimbal that simplifies challenging lighting installations into easily tailored masterpieces. With five CCT Selections from 2700-5000K, the high performing light engine with off-board driver allows for more flexible installations and increased lifetime with improved thermal management. The DGC fixture uses a plenum-rated cable connector to link the downlight module to the remote driver box and then pops into place with its adjustable, spring-loaded retention tabs for a secure fit, eliminating the need for a J-box or recessed housing. Directional lighting is now easier than ever with 25° tilt and 360° rotation making the DGC perfect for architectural accents such as living rooms, hallways, stairways and corridors.

Construction

- Fully enclosed aluminum housing
- Adjustable, spring loaded retention tabs ensure secure fixture retention
- Certified for direct contact with insulation

Optical System

- Dual emitter COB enables CCT selection of 2700K, 3000K, 3500K, 4000K, or 5000K
- COB maintains 4-step MacAdams with $\text{duv} < \pm 0.003$
- 90+ CRI and an $R9 > 50$
- TIR optic provides smooth, uniform light with a 33° beam angle
- 25° Tilt with 360° rotation of the housing

Electrical

- 120VAC 50/60Hz input to driver
- Off-board driver/junction box includes three 1/2" KOs and three-port poke-in connectors
- Dimmable to less than 5% with compatible TRIAC dimmers
- Operating temperature rating of 0°F to 120°F (-18°C to 49°C)
- L70 Lifetime rated for greater than 54,000 hours
- LM-79, LM-80 testing performed in accordance with IESNA standards

Finish

- White or Oil-Rubbed Bronze powder coat finish

Mounting and Installation

- Spring loaded retention arms allow for easy installation into ceilings up to 1" thick with no need for a recessed housing
- CCT adjusted via switch on driver junction box
- Extension power cables (10', 20') available

Listings

- LM-79, LM-80 testing performed in accordance with IESNA standards
- UL/cUL1598 Listed for damp locations
- California Title24/JA8 compliant
- Suitable for use in closets : Compliant with NFPA® 70, NEC® Section 410.16 (A)(3) and 410.16 (C)(5)
- Certified Type IC for direct contact with insulation
- Airtight per ASTM E283
- RoHS Compliant
- Meets FCC Part 15, Subpart B, Class B standards for conducted and radiated emissions
- LED lumen maintenance: L70(9k)>54,000 hrs

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Project

Catalog

Type

Date



DGC4
9W
LED Recessed Gimbal



NICOR

Ordering Information

Ordering

Example: DGC43120SRDWH

Series	Version	Input Voltage	CCT's	Shape	Trim Color
DGC4	3 (Version 3)	120 (VAC)	S (Selectable 2700K-5000K)	RD (Round)	WH (White)
					OB (Oil-Rubbed Bronze)

Specifications and dimensions subject to change without notice.

Accessories

4" Rough In Flat Template

ROUGHIN-TEMPLATE-4

Multi-diameter Mounting Frame

MULTIFRAME-346-1

3", 4", 6" Rough In Flat Template

ROUGHIN-TEMPLATE-346

20' Extension Cable

DRIVER-EXTCABLE-20


10' Extension Cable

DRIVER-EXTCABLE-10

Photometric Data

DGC4 2700K

Input Voltage (VAC)	120V
System Level Power (W)	8.9
Delivered Lumens (Lm)	715
System Efficacy (Lm/W)	81.4
Correlated Color Temp (K)	2748
Color Rendering Index (CRI)	97 R9>70
Beam Angle	33°
Spacing Criteria	0.55

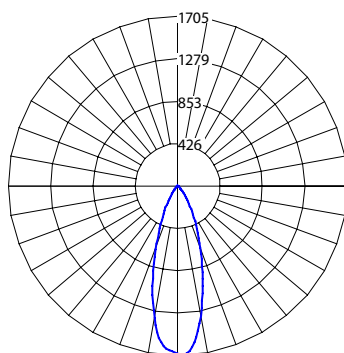

Intensity Summary (Candle Power)

Angle	Mean CP
0	1638
5	1552
15	884
25	371
35	131
45	30
55	18
65	11
75	5
85	0
90	0

CCT Data Multiplier

3000K	1.067
3500K	1.126
4000K	1.175
5000K	1.182

Cone of Light Tabulation

Mounted height (Feet)	Footcandles Beam Center	Diameter (Feet)
4	102.2	2.4
6	45.3	3.5
8	25.3	4.7
10	15.9	5.9
12	10.8	7.1
14	7.8	8.3
16	5.8	9.4

Zonal Lumen Summary

Zone	Lumens	% of Luminaire
0-30	571	79.8%
0-40	654	91.4%
0-60	698	97.5%
0-90	715	100%
90-180	0	0%
0-180	715	100%

Performance Data - Round

CCT Setting	Lumens	Watts	Lumens/Watt
2700K	715	8.9	81.4
3000K	763	8.8	87.1
3500K	805	8.7	92.7
4000K	840	8.7	96.7
5000K	845	8.8	96.5

Recommended Dimmers*

Legrand Adorne softTap DTP703TU
Lutron Caseta PD-6WCL
Lutron Caseta PD-10XN
Lutron Skylark SELV 300P
Leviton Decora 6672

*Not a complete list.
Check compatibility before installation.

Dimensions

