



DLR3 Select

3" Recessed LED Downlight




DLR3 Select

3" Recessed LED Downlight

The DLR3 Select is a newly improved 3" recessed downlight offering higher lighting efficiency for residential and commercial settings. Its quick and easy installation with an IDEAL luminaire connector and friction fit mounting system, along with an Edison screw base adaptor are perfect for remodel construction, making it a breeze to replace outdated fixtures. With an impressive CRI rating of 90 and an RA value of 60, it delivers exceptional light quality, ensuring accurate color representation. Adjusting the mood settings with the 5CCT selectable switch offers options from warm 2700K to cool 5000K lighting.

Dimensions

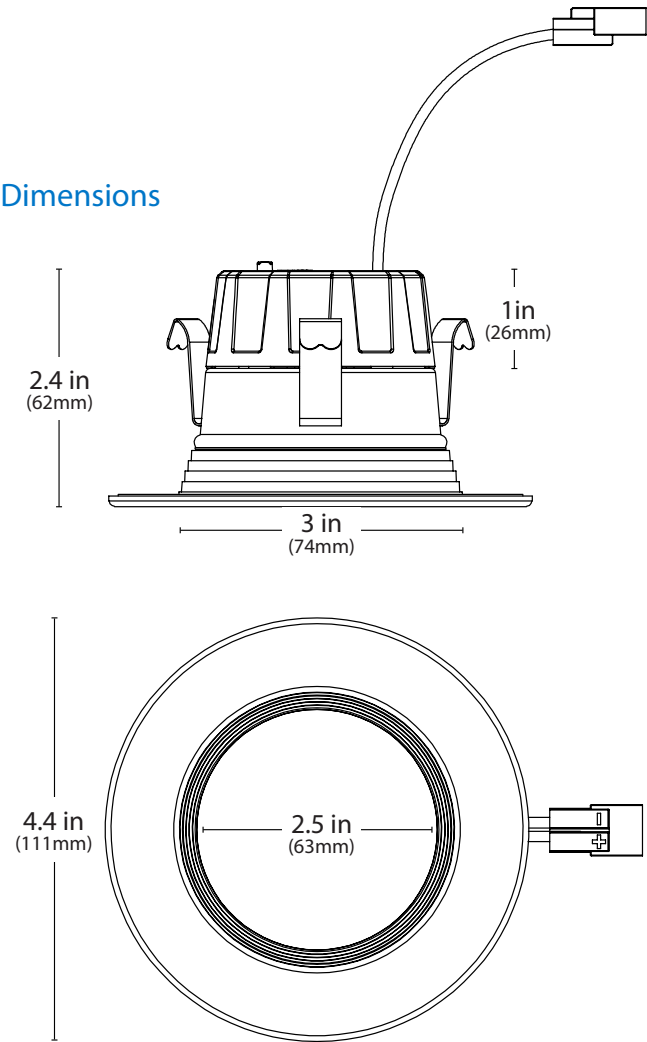

FEATURES



CRI 90+
R9 ≥50

Lumens
778-862+

Lifetime
>50,000 hrs

Beam Angle
85°

Ordering Information			Example: DLR32120S9WHBF			
Series	Version	Voltage	CCTs	CRI	Trim	Baffle
DLR3	20 (v2.0)	120	S (Select: 27/30/35/40/50K)	9 (90)	WH (White)	BF (Baffle)

*Specifications and dimensions subject to change without notice. Please refer to the website for the most up-to-date information.

Recommended Dimmers*	
Lutron Maestro MACL-153M	Lutron TGCL-153PH
Lutron Skylark CTCL-153PDH	Lutron Diva DVWCL-153PH

*Not a complete list. Check compatibility before installation.

Housing Compatibility*	
13200A-LED	3" LED IC AIRTIGHT NEW CONST. HOUSING
13201AR-LED	3" LED IC AIRTIGHT REMODEL HOUSING

* Most Standard 3" Recessed Housings
* Not a complete list. Check compatibility before installation



WAREHOUSE LOCATIONS:

Albuquerque, NM
Buford, GA
Roseville, CA

LIT-DLR3-Select
20240329
© 2024 NICOR® • ALL RIGHTS RESERVED



NICOR Lighting
2200 Midtown Place NE Albuquerque, NM 87107 USA
www.nicorlighting.com | T. 800-821-6283 F. 800-892-8393