

30032/30033-LED

Indoor LED Wall Sconce

Product Description

The 30032 wall sconce features a contemporary brushed nickel finish with a 7.2" white alabaster swirled glass. This striking combination of metal and glass adds elegance to any room. Matching vanity and 9.4" 30033 wall sconce are included in this series as well.



- Input Voltage: 120 VAC
- Watts: 24W
- CRI: 80
- Color Temp: 3000K, 4000K
- Housing Color: Nickel Finish, Frosted Glass

Project



Catalog

Type

Date

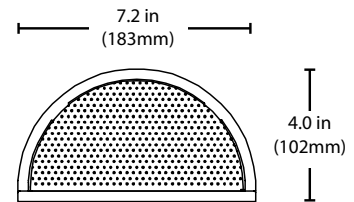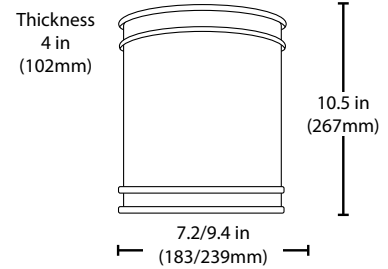

30032




30033



Photometric Data

30032 3000K

Input Voltage (VAC)	120
System Level Power (W)	14
Delivered Lumens (Lm)	1150
System Efficacy (Lm/W)	82.1
Correlated Color Temp (K)	3000
Color Rendering Index (CRI)	>80
Beam Angle	131°
Spacing Criteria	1.38



Intensity Summary (Candle Power)

Angle	Mean CP
0	290
5	289
15	279
25	259
35	229
45	199
55	172
65	144
75	108
85	66
90	54

Cone of Light Tabulation

Mounted height (Feet)	Footcandles Beam Center	Diameter (Feet)
4	18.1	4.4
6	8.1	6.5
8	4.5	8.7
10	2.9	11.0

Zonal Lumen Summary

Zone	Lumens	% of Luminaire
0-30	223	19.4
0-40	365	31.7
0-60	667	58.1
0-90	995	86.5
90-180	155	13.5
0-180	1150	100.0

Performance Data


Model Number	Lumens	Watts	Lumens/Watt
30032-LED-NK-30K	1150	14	82.1
30032-LED-NK-40K	1177	14	84.1

CCT Data Multiplier

30033-LED-NK-40K 1.024

30033 3000K

Input Voltage (VAC)	120
System Level Power (W)	21.6
Delivered Lumens (Lm)	1730
System Efficacy (Lm/W)	80.1
Correlated Color Temp (K)	3000
Color Rendering Index (CRI)	>80
Horizontal Beam Angle	155°
Vertical Beam Angle	120°
Spacing Criteria	1.44



Intensity Summary (Candle Power)

Angle	Mean CP
0	333
5	332
15	322
25	302
35	272
45	246
55	233
65	217
75	165
85	101
90	85

Cone of Light Tabulation

Mounted height (Feet)	Footcandles Beam Center	Diameter (Feet)
4	20.8	5.1
6	9.2	7.7
8	5.2	8.2
10	3.3	12.7

Zonal Lumen Summary

Zone	Lumens	% of Luminaire
0-30	262	15.1
0-40	433	25.0
0-60	836	48.3
0-90	1341	77.5
90-180	389	22.5
0-180	1730	100.0

Performance Data

Model Number	Lumens	Watts	Lumens/Watt
30033-LED-NK-30K	1730	21.6	80.1
30033-LED-NK-40K	1737	21.6	80.4

CCT Data Multiplier

30033-LED-NK-40K 1.022

Fixtures tested per LM-79-08. Photometric data is of the performance of a representative fixture with round white trim. Results may vary in the field.

Ordering Information

Example: 30032-LED-NK-40K

Series	Finish	CCTs
30032-LED	NK (Nickel)	30K (3000 K)
30033-LED		40K (4000 K)

Specifications and dimensions subject to change without notice.