


ASSEMBLY AND INSTALLATION INSTRUCTIONS

H0315

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save this instruction.

Hardware Package (included):

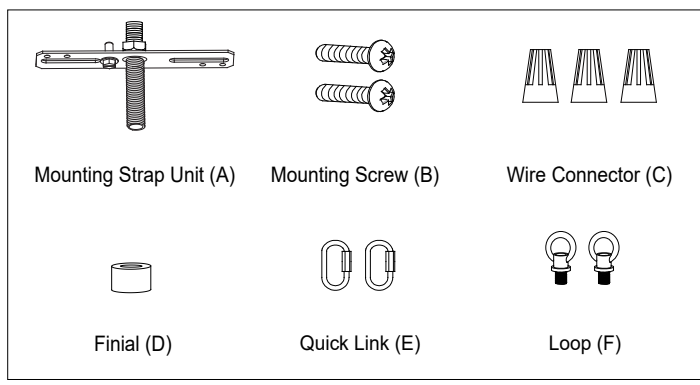

Installation Steps

Turn off the power at fuse or circuit box.

1. Attach the mounting strap unit (A) to the outlet box by using two mounting screws (B).
2. Rod Connections:
 - a. Thread the fixture wire from the fixture through the lower rod, then secure the lower rod onto fixture using the threaded pipe.
 - b. Thread the fixture wire through the middle rod, then secure the middle rod onto the lower rod using the threaded pipe.
 - c. Thread the fixture wire through the upper rod, then secure the upper rod onto the middle rod using the threaded pipe.
 - d. Thread the fixture wire through the loop (F) and fixture canopy, then secure the loop (F) onto the upper rod using the threaded pipe. Repeat the rod connection for the other side without wires.

Note: Length adjustable from 18" to 54". Use fewer rods if shorter length is desired.


3. Connect the top loops of the canopy kit to the loops (F) of the fixture by using two quick links (E).

4. Make wire connections using wire connectors (C):

- The smooth wire (marked) from fixture to the black wire from power source.
- The ridged wire (unmarked) from fixture to the white wire from power source.
- Attach the fixture ground wire the mounting strap unit (A) with the green ground screw, then connect it to the house ground wire with the wire connector (C).

Carefully tuck wires back into the outlet box.

5. Attach the canopy kit to the mounting strap unit (A) and secure it with a finial (D).

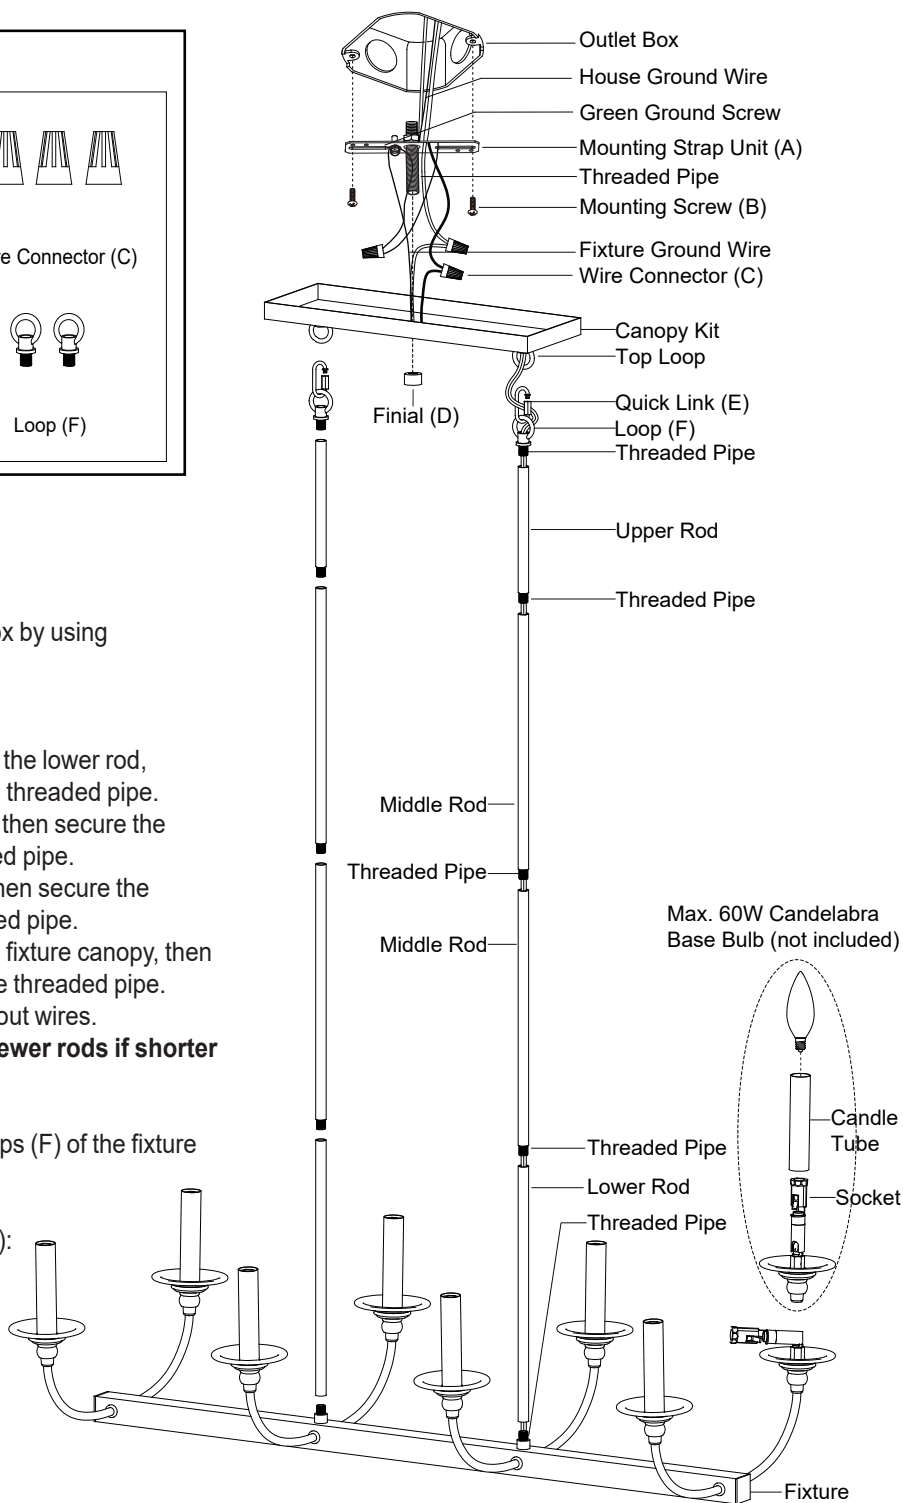

6. Straighten the lamp holders, and attach the candle tubes to the sockets.




7. Install 8 x 60W max. candelabra base bulbs (not included).

See relamping label at socket area or packaging for maximum wattage allowed.

Turn on the power at fuse or circuit box.

The following parts are available for reorder if damaged or missing.

Spare Parts List:

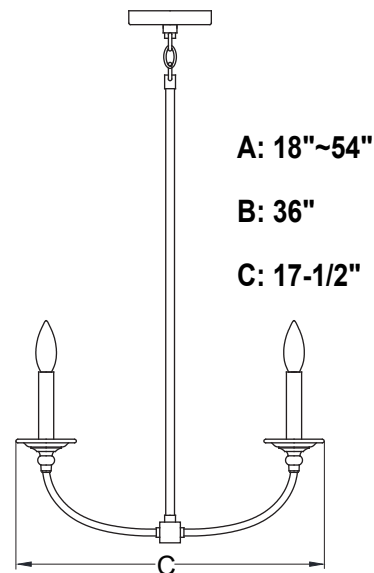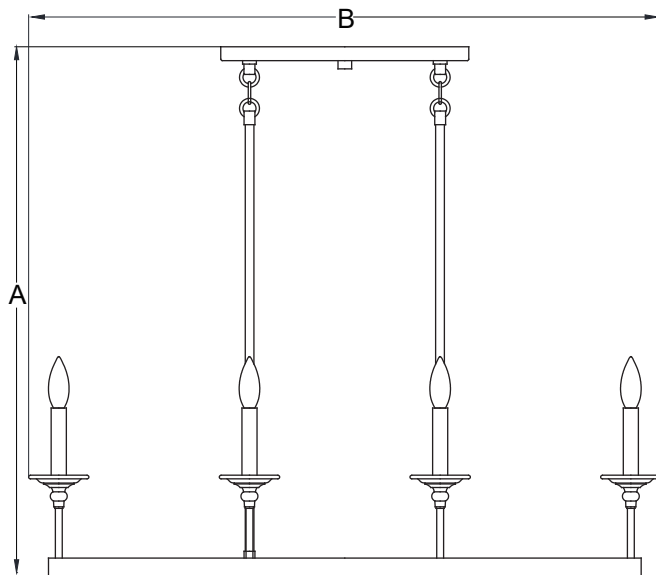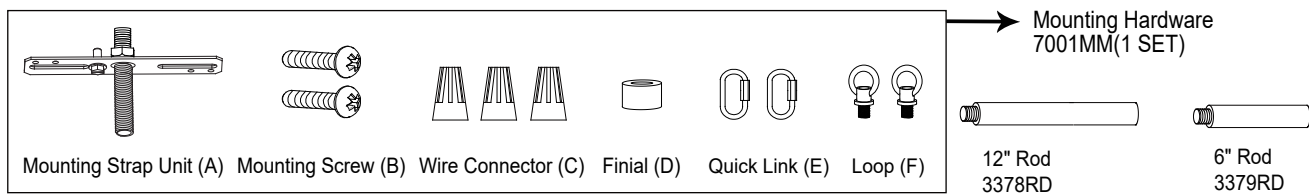

1 Year Warranty

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

Exclusions: This warranty does not include the failure of products from extreme acts of nature; environmental conditions not suited for the products intended use; operation in temperatures outside of the range specified in the instruction manual; usage with improper power supply, power surges or dips. For coastal locations, some corrosion is considered normal for the environment.

Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.

How can warranty service be obtained?

info@vaxcel.com
1-800-482-9235