


# DLG56

## 5"- 6" LED DOWNLIGHT GIMBAL



### DIMENSIONS

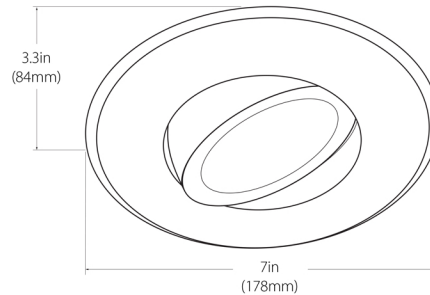

### TRIM OPTIONS



The DLG56 is the perfect LED downlight for directional accent lighting. Its easy to use twist-and-turn design allows for fine adjustment of the gimbal position. The 360 degrees of rotation and 35 degrees of adjustable tilt in both directions makes the DLG suitable for sloped ceilings and wall wash. The sleek design enhances any interior space with its flush mounting and aesthetic appeal.

### FEATURES

- Compatible with most 5" and 6" recessed housings
- Suitable for use in IC Rated recessed housings
- 36,000 hour life expectancy
- Greater than 90 CRI with R9 greater than 50
- Meets California Quality Specifications
- Easy installation with torsion spring mounting system
- Dimmable to 10% with most standard dimmers
- Durable construction with integrated trim
- 5 Year Warranty

### COMPATIBLE 5-6" HOUSINGS



### PRODUCT SPECIFICATIONS

Series	Input Voltage (VAC)	Delivered Lumens (Lm)	System Level Power (W)	System Efficacy (Lm/W)	Color Rendering Index (CRI)
DLG56-10-120-4K-WH	120	1064	12	85	94

### ORDERING INFORMATION

Example: DLG56-10-120-3K-WH

Series	Version	Voltage	CCT's	Trim Color
DLG56	10 (v 1.0)	120 (V)	2K (2700)	WH (white)
			3K (3000)	BK (black)*
			4K (4000)	NK (nickel)*
				OB (oil-rubbed bronze)*

