


Lumination™ LED Luminaires

Suspended LED Fixture | SS Series



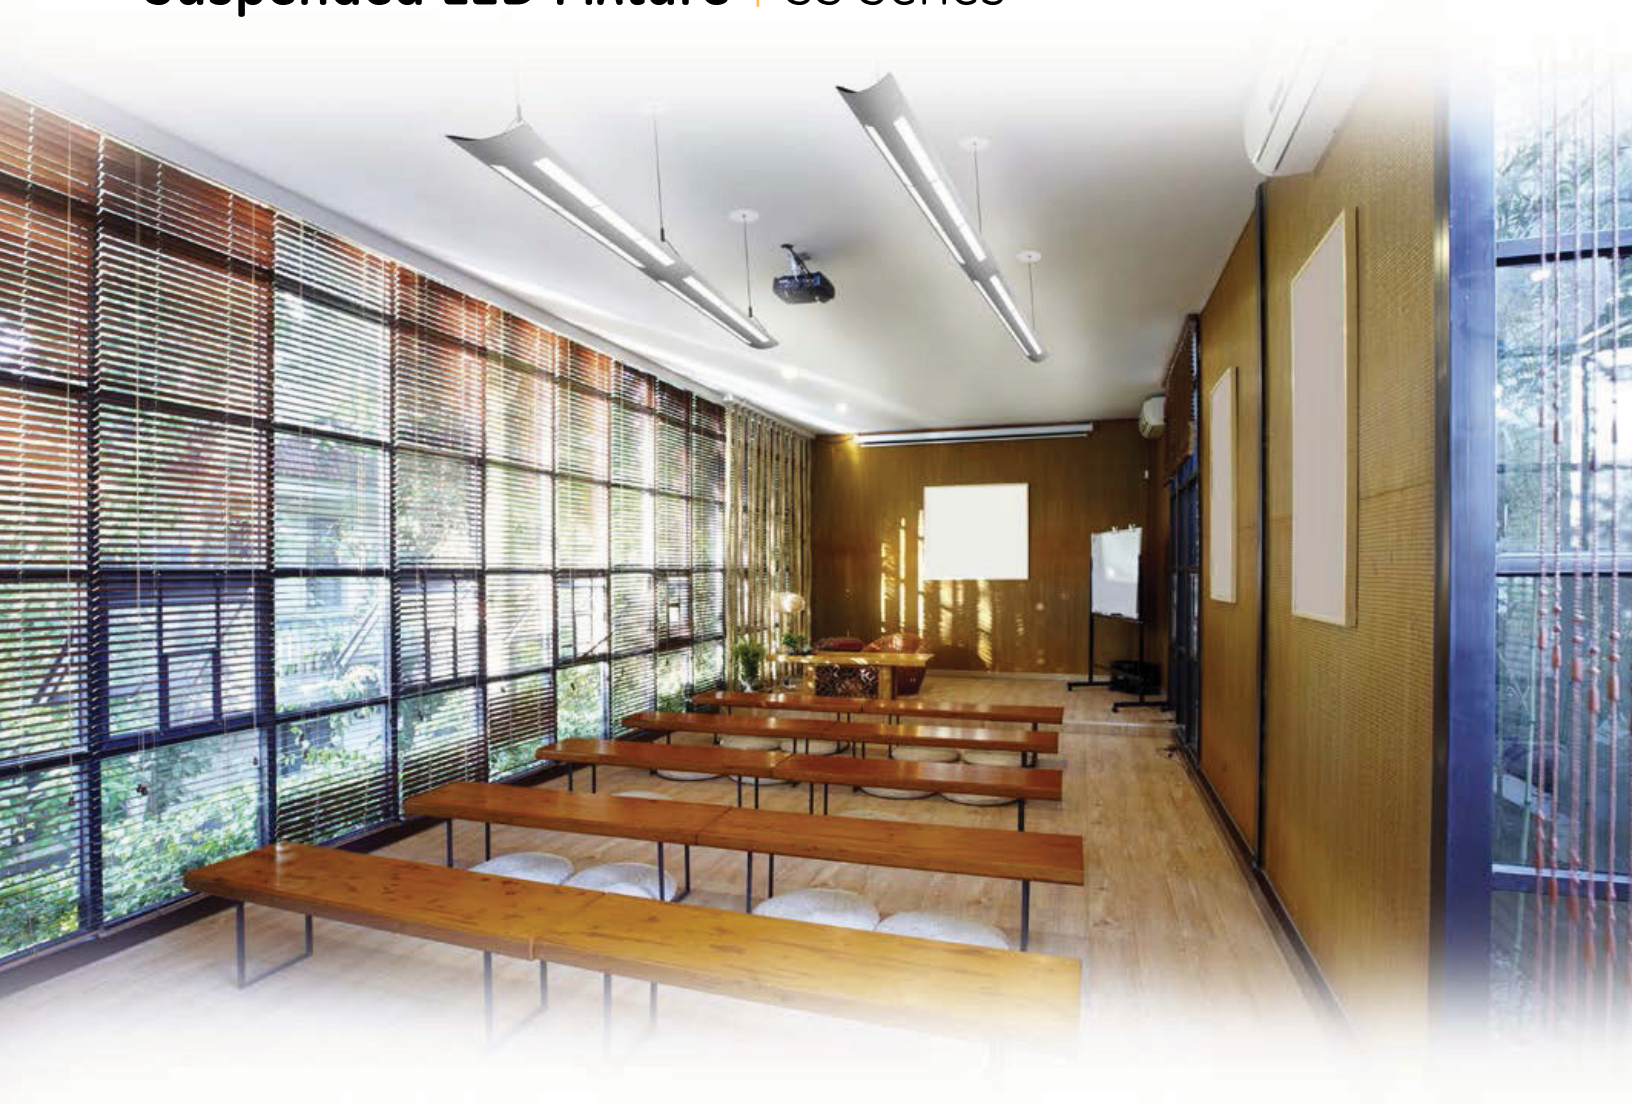

Simulated image

Suspended Sophistication

Stunning design gives these fixtures the power to make a bold visual statement in a wide array of applications that include office, school, and library. Advanced GE engineering delivers impressive efficiency that saves money on up-front installation labor, as well as ongoing maintenance and energy costs year after year. Breakthrough optics target beautiful (83 CRI) dimmable light precisely where needed. It's the perfect combination of inspired aesthetic and economical performance in an affordable solution.

Features & Benefits

- Unique optics create both 75% uplight and 25% downlight
- Impressive ambient and task light in one fixture
- Visually appealing light / 83 CRI
- Bright (up to 120 LPW) output with minimal glare
- Fixtures easily connect for long continuous rows
- 5 year limited warranty


Applications


- Office
- Municipal
- School
- Health Club
- Commercial

LED Technology

- Energy efficient (up to 120 lumens per watt)
- Long rated life & low maintenance:
65,000-hour Life
- Standard dimming control:
DALI & 0-10V

75% uplight for warm, even coverage throughout the space

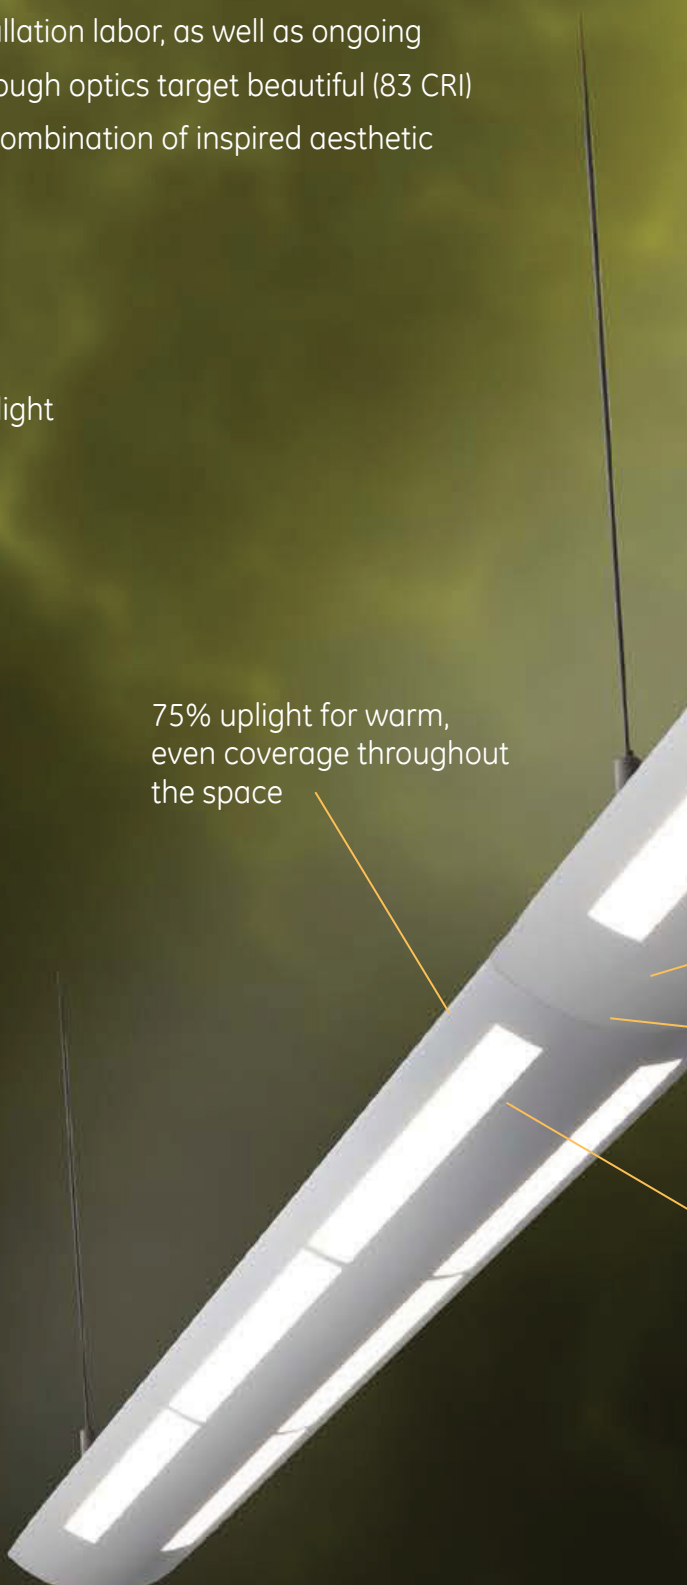

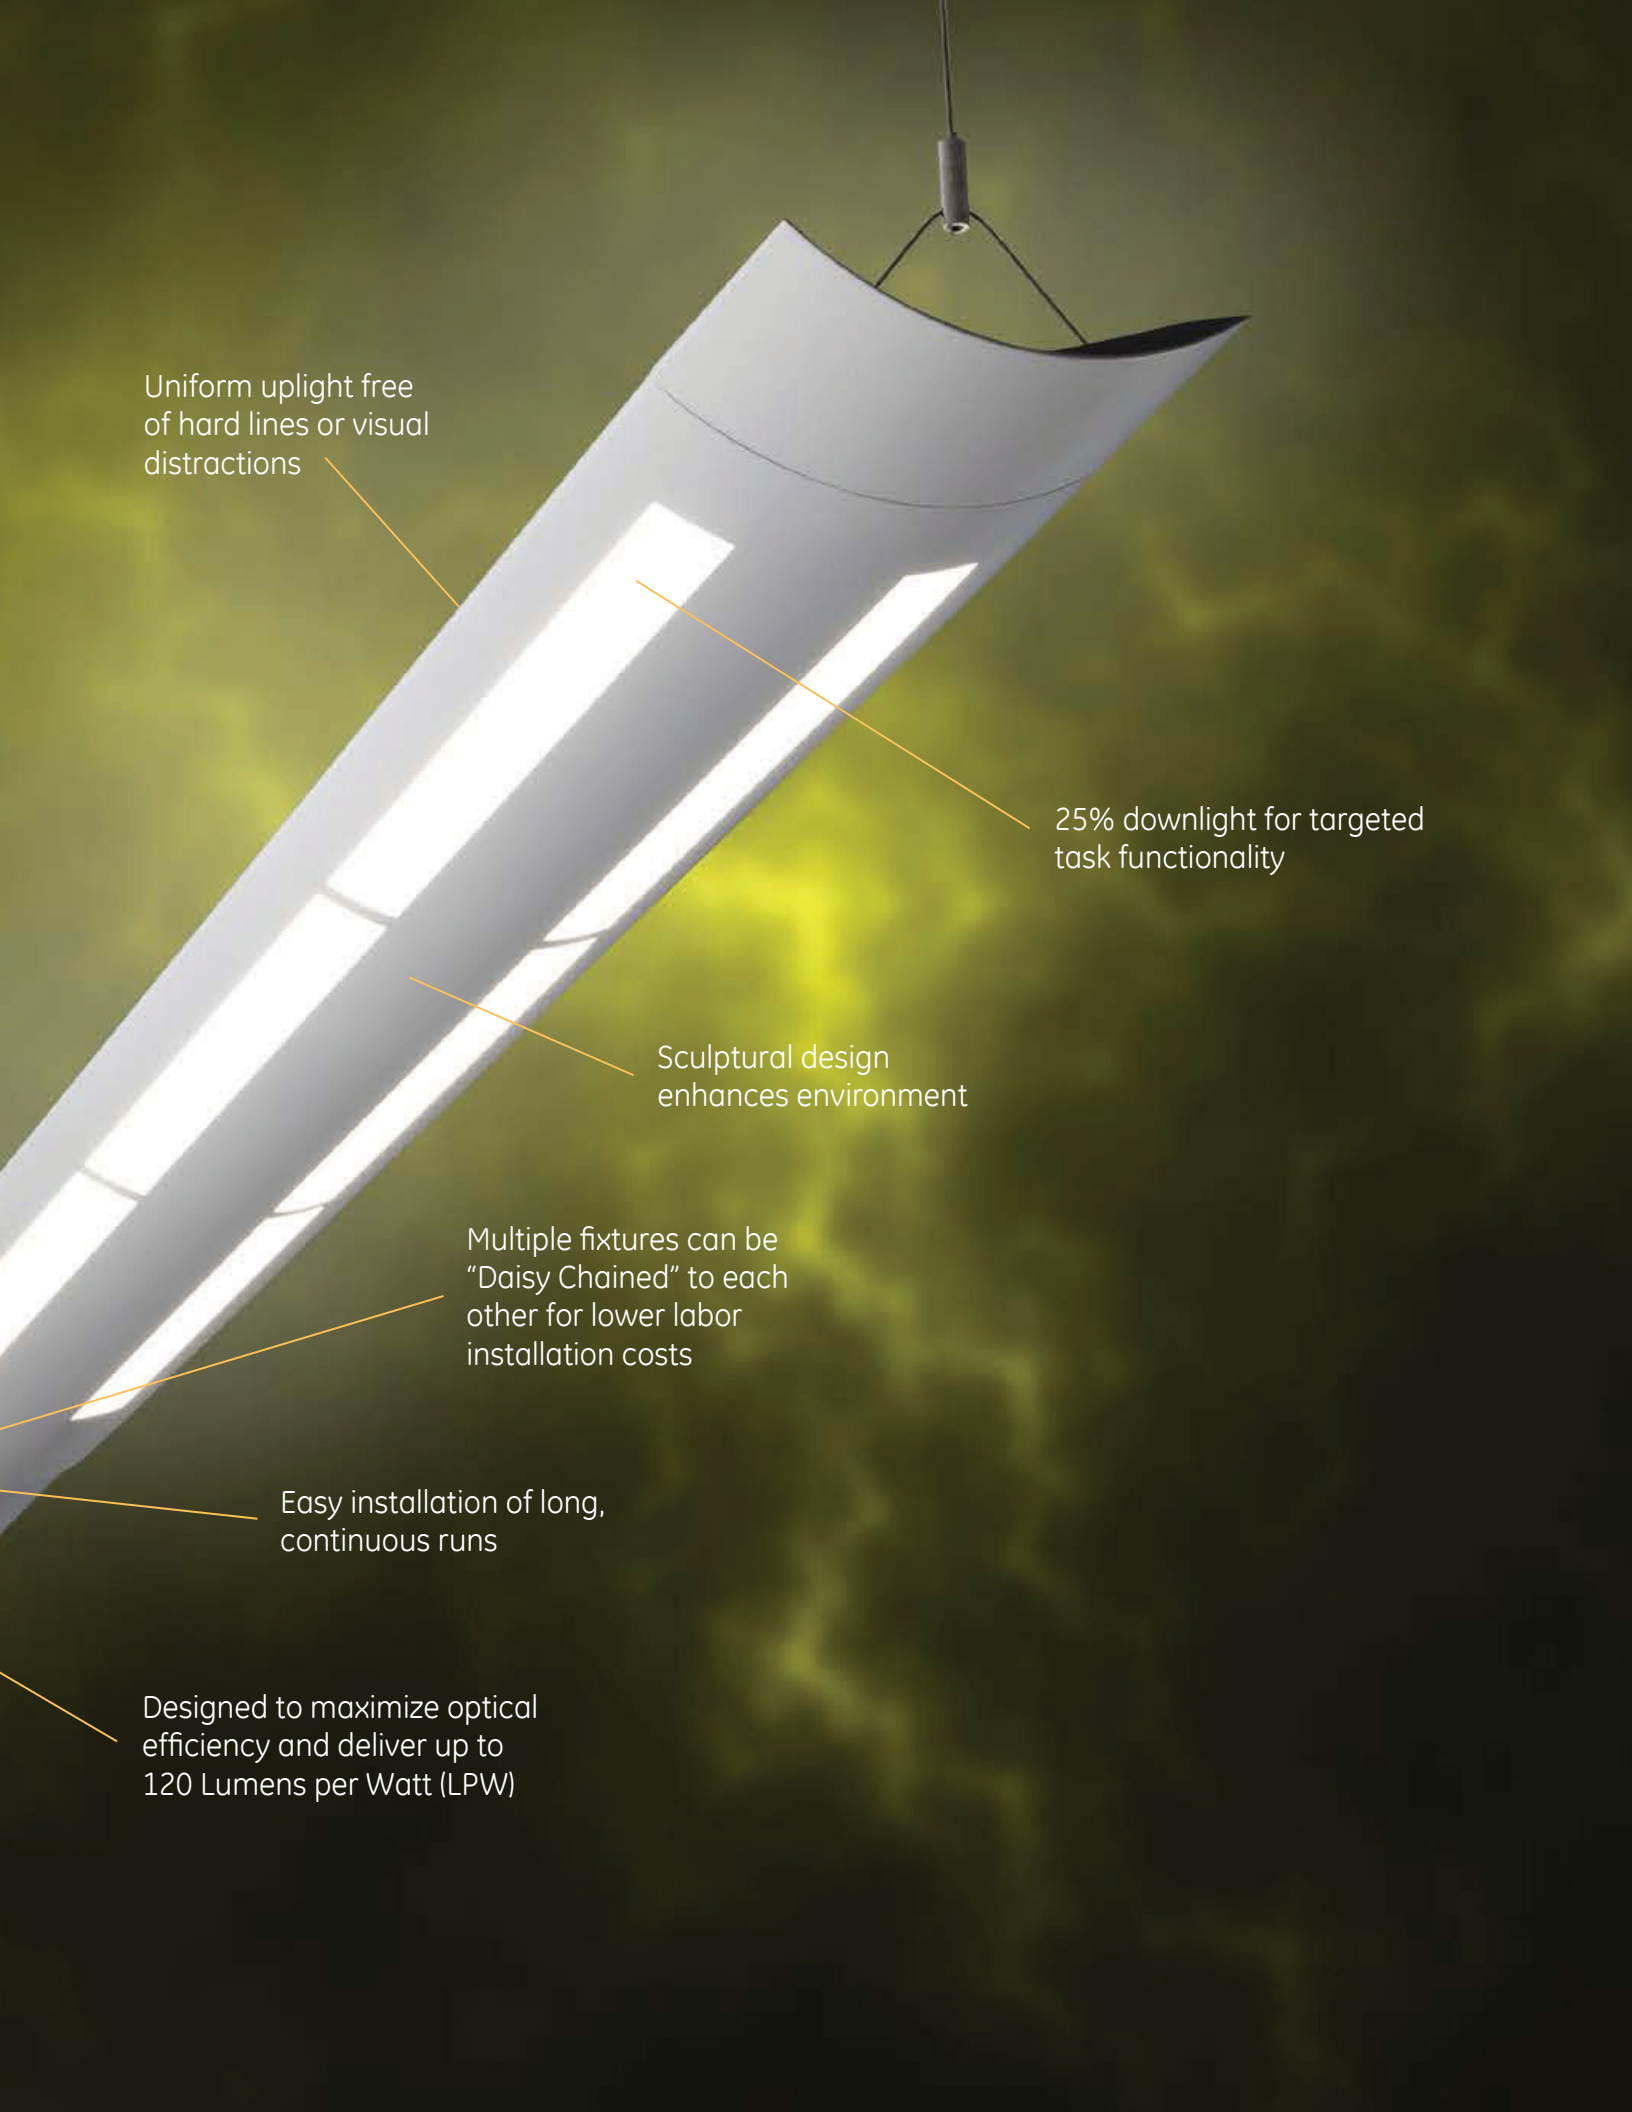

Uniform uplight free
of hard lines or visual
distractions

25% downlight for targeted
task functionality

Sculptural design
enhances environment

Multiple fixtures can be
"Daisy Chained" to each
other for lower labor
installation costs

Easy installation of long,
continuous runs

Designed to maximize optical
efficiency and deliver up to
120 Lumens per Watt (LPW)

Lumination™ LED Luminaires

SS Series



Product Description:

Lumination LED Luminaires - SS Series are designed to deliver a unique combination of uplight - and downlight in one affordable solution. Commercial applications include office, school and library. These advanced technology fixtures have a long life and deliver up to 120 lumens per watt, allowing for lower maintenance and operating costs.

Performance Summary:

Delivered Light Output: 3000 lm - 10,000 lm

System Input Power: 26W - 89W

Efficacy: Up to 120 LPW

Input Voltage: 120-277V, 347V

Uplight/Downlight ratio: 75% / 25%

Standard Dimming Control: 0-10V

CCT: 3500K, 4000K

Typical CRI: 83

Color Consistency: 4-Step MacAdam Ellipse

Lifetime Rating: L85 @ 50,000 hours


Input Frequency: 50/60 Hz

Power Factor: >0.9

THD: < 20%

Weight: 10 kg (8' fixture), 6kg for 4' fixture

Operating Conditioning: -10°C to 35°C

Certified by: 

a product of
ecomagination™


Product Dimensions:

SS Series

4 Ft Fixture



8 Ft Fixture

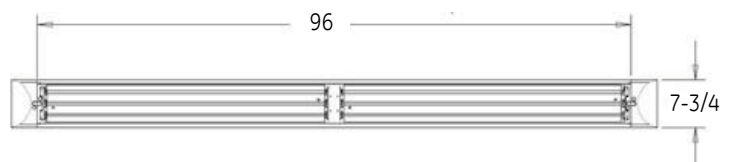

current
powered by GE

www.currentbyge.com

All trademarks are the property of their respective owners. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions. Current, powered by GE is a business of the General Electric Company.
© 2018 GE.

January/2018