

18304 · CAST ALUMINUM LED EXIT SIGN



PRODUCT INFORMATION

- Input Voltage (VAC) 120/277
- Input Power (W) 3
- Emergency Operation 90 Minutes

APPLICATIONS



The 18304 Series LED Exit Sign features a curved, single or double sided design. This UL924 compliant sign with a cast-aluminum constructed housing and faceplate(s). High output LEDs deliver an evenly illuminated exit sign and the maintenance-free, nickel-cadmium battery provides reliable performance and long life. The 18304 Series offers flexible installation for side or top mount options along with field adjustable chevrons for universal configuration based on your application's directional needs.

Construction

- Cast-aluminum housing and faceplates
- Single or double face configuration
- Test switch and charge/status indicator

Optical System

- Fully-illuminated 6" letter height with 3/4" stroke
- LED light engine provides consistently bright, even EXIT legend illumination with red or green LEDs

Electrical

- 120/277VAC Dual Voltage Operation, 60Hz input
- Operating temperature rating of 50°F to 104°F (10°C to 40°C)
- Premium grade Ni-Cad rechargeable battery (on EM options)
- 90-minute capacity


Finish

- White faceplate with brushed aluminum housing
- Available with red lettering only

Installation

- Universal wall-mounting knockout pattern in backplate
- Side or top mount available using included canopy
- Field removable, knockout chevron directional indicators in faceplates
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Dimensions

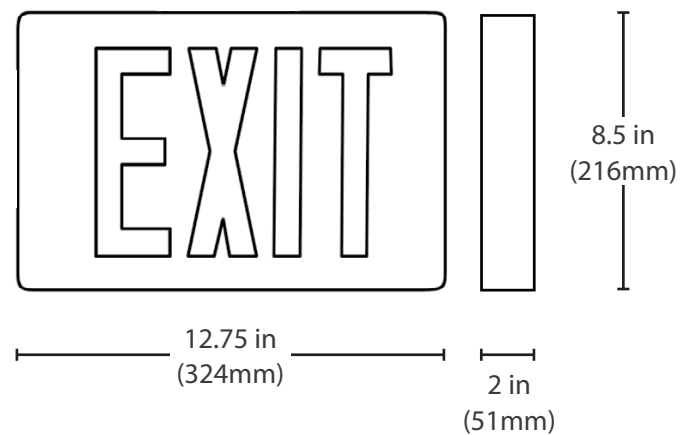

FEATURES



Test the 90-minute Emergency Backup Mode with the press of a button.

The 18304 features a cast-aluminum housing and faceplate with a curved design.



Ordering Information

Series	Number of Sign Faces	Letter Color	Housing Finish	Sign Face Color	Emergency
18304	S (Single Face)	R (Red)	A (Aluminum)	W (White)	_BLANK (None, AC Only)
	D (Double Face)				EM (Battery Backup)

See spec-sheet for additional ordering information.

