


ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0319

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.

Hardware Package (included):

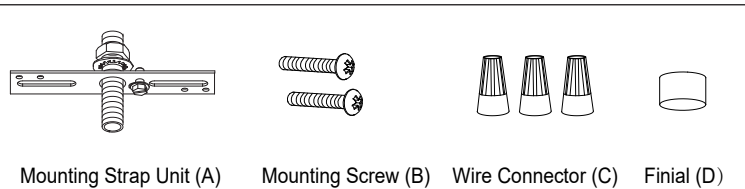


Installation Steps



Turn off the power at fuse or circuit box.

1. Attach the mounting strap unit (A) to the outlet box by using two mounting screws (B).
2. Choose three same length of the chains you need, hook one end of the chains to the arms, and then weave the fixture wire and the ground wire through one of the chains, then connect the other end of the chains to the loops.
3. Connect the smooth wire from the fixture (marked) to black wire from the outlet box (power), the ribbed wire from the fixture (unmarked) to white wire from the outlet box (neutral) with the wire connectors (C) provided. Connect the copper wire from the fixture to the mounting strap unit (A) by securing it with the green ground screw, then connect it to the house ground wire with wire connector (C). Carefully put all the wires into outlet box.
3. Remove the finial (D) from the mounting strap unit (A).
4. Attach the ceiling pan to the mounting strap unit (A) by inserting threaded pipe into the center hole the ceiling pan and secure it with the finial (D).
NOTE: Depth of threaded pipe may need to be adjusted to properly fit the finial.
5. Install 3 x 60W Max. candelabra base bulbs (not included).
See relamping label at socket area or packaging for maximum wattage allowed.

Turn on the power at fuse or circuit box.

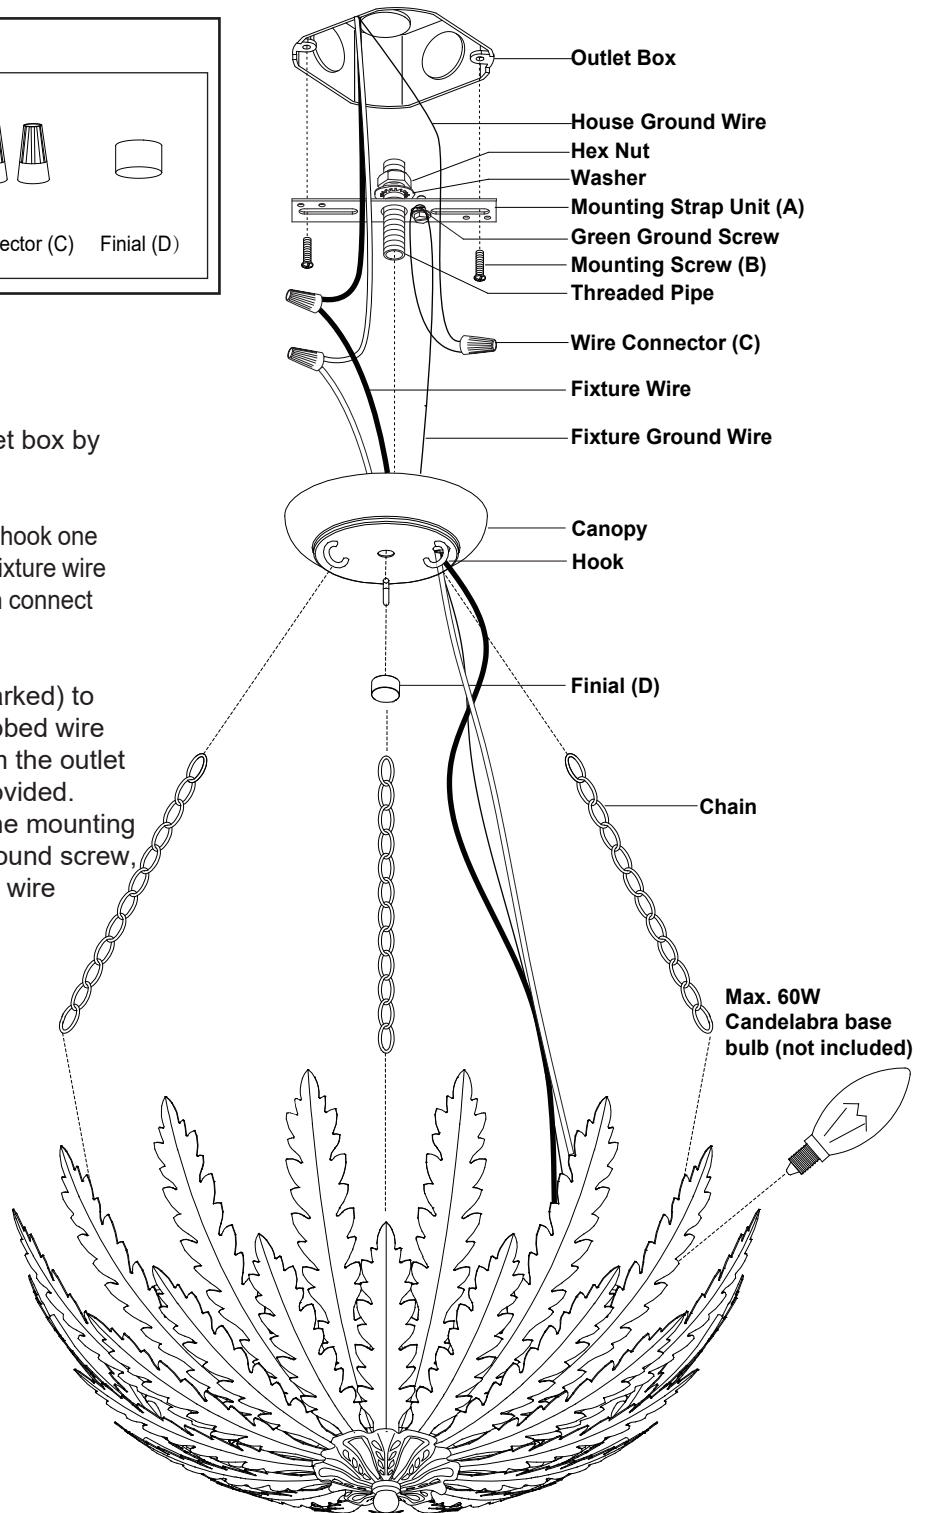

The following parts are available for reorder if damaged or missing.

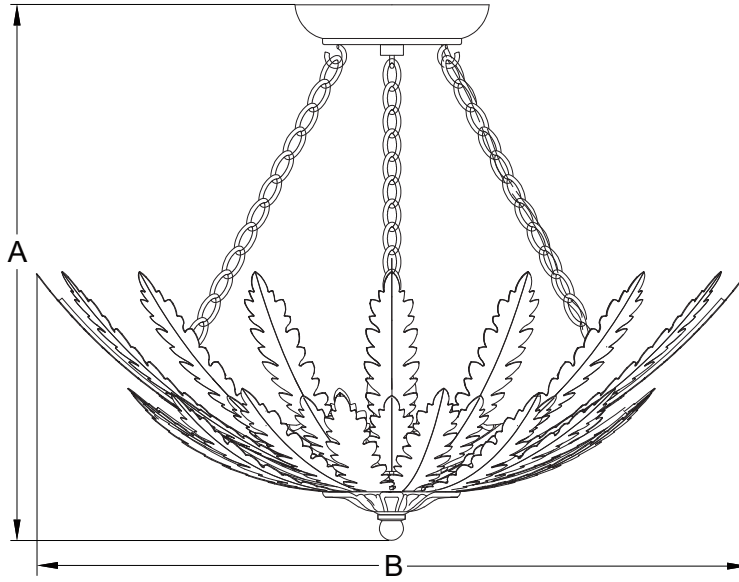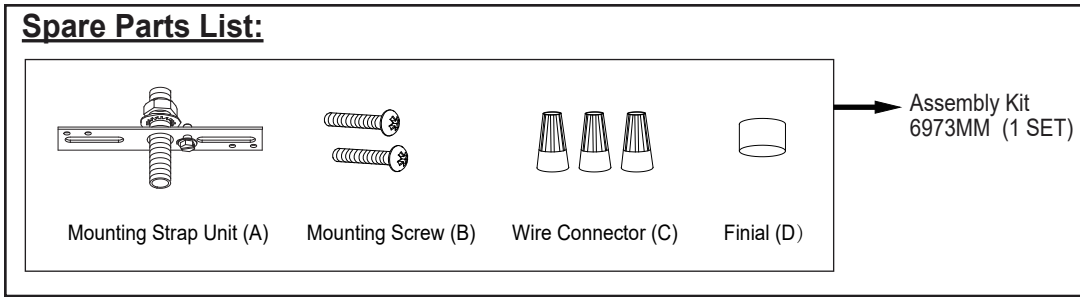

A: 13-3/4"

B: 18-1/4"

1 Year Warranty

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

Exclusions: This warranty does not include the failure of products from extreme acts of nature; environmental conditions not suited for the products intended use; operation in temperatures outside of the range specified in the instruction manual; usage with improper power supply, power surges or dips. For coastal locations, some corrosion is considered normal for the environment.

Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.

How can warranty service be obtained?

info@vaxcel.com

1-800-482-9235