
ASSEMBLY AND INSTALLATION INSTRUCTIONS

W0354

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.

Hardware Package (included):

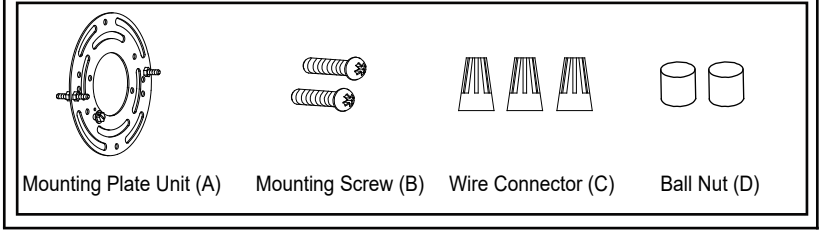

Installation Steps

Turn off the power at fuse or circuit box.

1. Remove the two ball nuts (D). Remove the mounting plate unit (A) from the backplate.

2. Attach mounting plate unit (A) to the outlet box using two mounting screws (B).

3. Attach the inner metal mesh shade onto the outer metal mesh shade and secure them with the socket rings, by supplied socket fixer.

VAXCEL

191211

4. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
   ---Connect the hot wire (black insulation) from the power source to the black wire from the fixture.
   ---Connect the neutral wire (white insulation) from the power source to the white wire from the fixture.
   ---Attach the fixture ground wire (green insulation or bare wire) to the mounting plate unit (A) with the green ground screw, or connect to the source ground wire if available.
   Carefully put the wires back into the outlet box.


5. Attach the fixture to the mounting plate unit (A) by inserting headless screws into the backplate holes, then secure it with two ball nuts (D).


6. Install a bulb (not included). Check relamping label at socket area or packaging for maximum allowed wattage.

Turn on the power at fuse or circuit box.

The following parts are available for re-order if damaged or missing.

Spare Parts List:

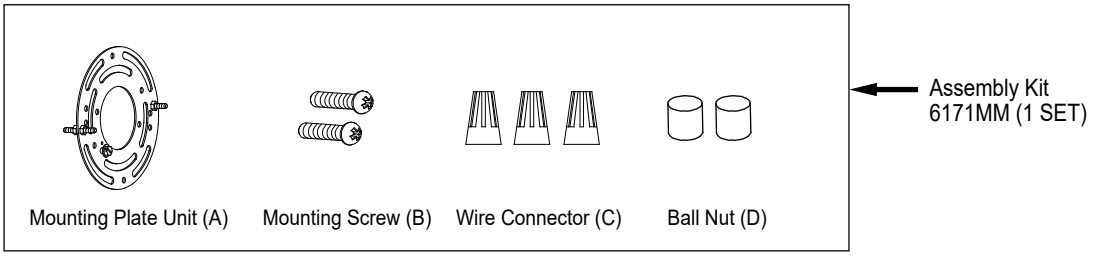

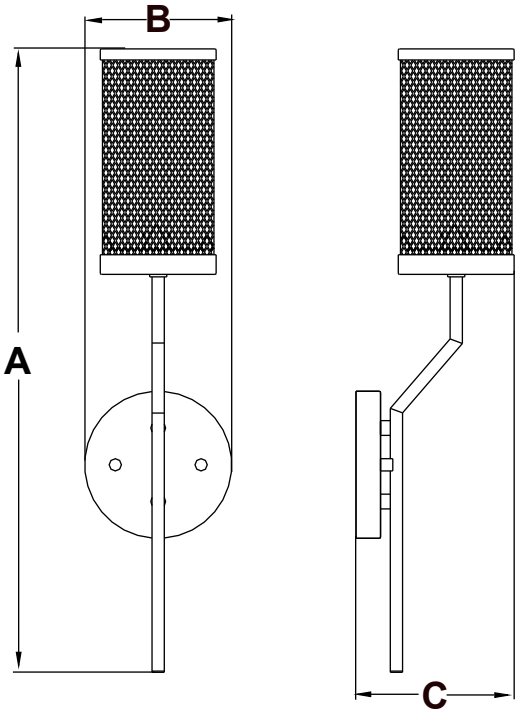

A: 20”

B: 4-3/4”

C: 5-1/8”

VAXCEL

191211