


- 1. Designed to mount Florence Versatile<sup>™</sup> 4C mailbox single column 10-High Suite and ADA Max Height Suite modules (sold separately).
- 2. For use with front loading modules only.





DRAWING NUMBER www.florencemailboxes.com • (800) 275-1747

LAST REV DATE 7/03/2014 DRAWN BY

SM10SCS A GIBRALTAR INDUSTRIES COMPANY

SCALE


MODEL SM10S

**NONE** 

TNS

C

## versatile<sup>TM</sup> 4C Mailbox, 4CADS-01

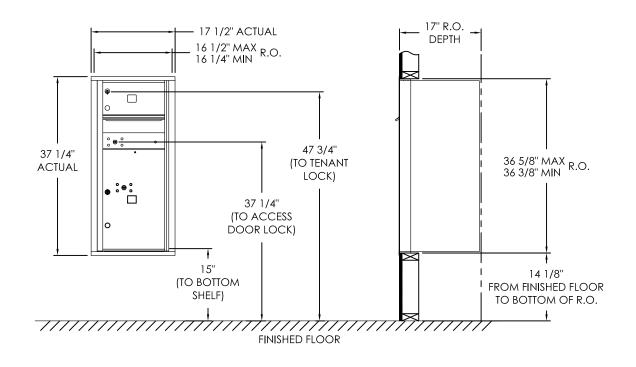

## COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
MAILBOX	MB2	6-1/2" H x 12" W x 15" D	1
OUTGOING MAIL	OM2	6-1/2" H x 12" W x 15" D	1
PARCEL	PL6	20-1/2" H x 12" W x 15" D	1

## Notes:

- 1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
  - a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
  - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
  - c. No patron (tenant) lock shall be positioned more than 67" AFF.
  - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
  - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
- 2. This 4C mailbox can also be used for private applications.
- 3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator: www.florencemailboxes.com/configurator.

PRODUCT SERIES: VERSATILETM 4C FRONT LOAD MAILBOX



5935 Corporate Drive • Manhattan, KS 66503 800.275.1747 • www.florencemailboxes.com

MODEL 40	CADS-01	REV	В
SCALE	NONE	LAS	t rev date 06/29/19
DRAWING	NUMBER		DRAWN BY
4CA	ADS-01CS		RAK