

Economy Series

12VDC

EquiLine FineLine

2.4W/ft.
(7.9W/m)

297 Lumens
per ft.
(971 per meter)



Long and narrow, FineLine is the unobtrusive way to provide smooth, linear lighting almost anywhere. The low profile design features a frosted diffuser for even illumination and with optional manual or remote control dimmers, creating the perfect atmosphere is effortless.

Features:

Extremely thin, low-profile design – 5/16" (8 mm)

90° beam spread

Available in (3) lengths – 8" (203 mm), 12" (305 mm) or 22" (559 mm)

Linkable

Frosted diffuser

79" (2 m) starter cord included

Surface mount

Typical Applications:

Shelving

Displays or store fixtures

Interior and under cabinets

Food service equipment




Available Finishes:



Aluminum (AL)


Dimensions:



8" (203 mm)

12" (305 mm)

22" (559 mm)

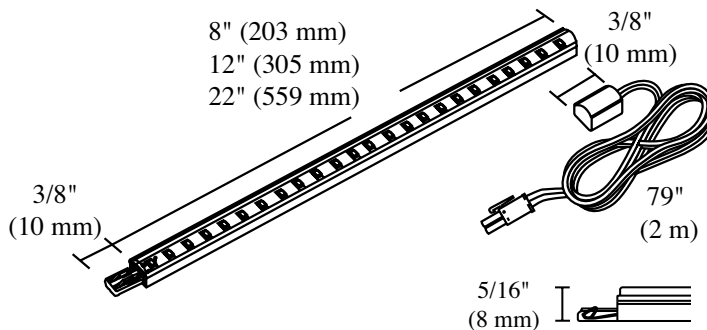

Optional in-line touch dimmer available (4-step: low-medium-high-off)




Linkable (back-to-back or link cord) up to 12' (3.66 m) continuous run




Straight and adjustable mounting U-Clips included

Typical Setup:

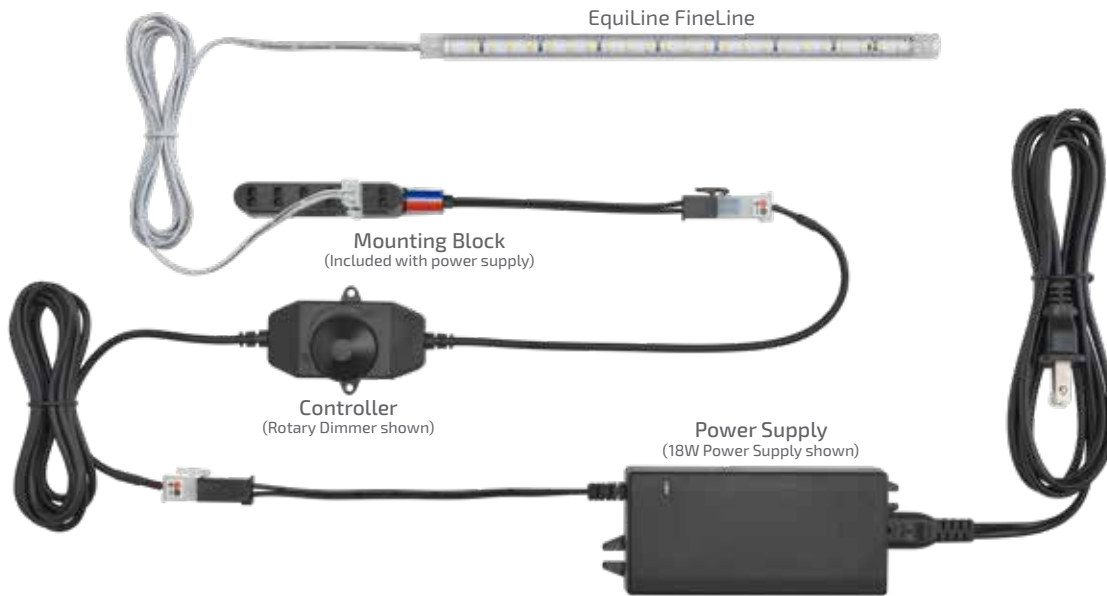


- Required
- Optional


Accessories:




Power Supplies
see power supply section



Controllers
see controller section



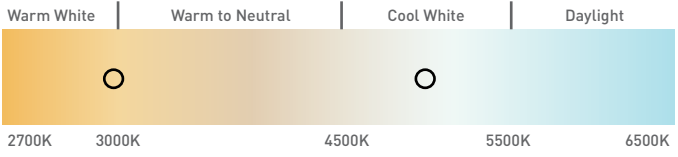


FineLine Link Cord
L-LED-STKLNK-5-1
L-LED-STKLNK-15-1
L-LED-STKLNK-25-1
L-LED-STKLNK-60-1
L-LED-STKLNK-120-1
L-LED-STKLNK-180-1



FineLine Touch Dimmer
L-LED-STKDIM-TD4-1

Specifications:

Wattage	Lumens	Efficacy (lm/W)	Input Voltage	Diode Life	Max Per 60W Power Supply	Max Continuous Run	Mounting	Warranty	Beam Angle												
2.4 W/ft. (7.9W/m)	297 per ft. (971 per m)	124	12VDC	50,000 Hours	24' (7.32 m)	12' (3.66 m)	Surface	3 Year													
Photometric Data					Color Temperature																
 <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Height</th> <th>Light Output</th> <th>Beam Area</th> </tr> </thead> <tbody> <tr> <td>1ft (.3 m)</td> <td>284Fc (3056.9lx)</td> <td>3.2ft L x 1.7ft W (.97 m L x .52 m W)</td> </tr> <tr> <td>3ft (.9 m)</td> <td>31.5Fc (339.1lx)</td> <td>6.3ft L x 3.3ft W (1.9 m L x 1 m W)</td> </tr> <tr> <td>6ft (1.8 m)</td> <td>7.88Fc (84.8lx)</td> <td>19ft L x 9.9ft W (5.7 m L x 3 m W)</td> </tr> </tbody> </table> <p style="text-align: right; font-size: small;">L-LED-STK22-CNI-1 Tested</p>					Height	Light Output	Beam Area	1ft (.3 m)	284Fc (3056.9lx)	3.2ft L x 1.7ft W (.97 m L x .52 m W)	3ft (.9 m)	31.5Fc (339.1lx)	6.3ft L x 3.3ft W (1.9 m L x 1 m W)	6ft (1.8 m)	7.88Fc (84.8lx)	19ft L x 9.9ft W (5.7 m L x 3 m W)	 <p style="text-align: center; font-size: small;"> Warm White Warm to Neutral Cool White Daylight 2700K 3000K 4500K 5500K 6500K ▲ Warm (3000K) ▲ Cool (5000K) </p>				
Height	Light Output	Beam Area																			
1ft (.3 m)	284Fc (3056.9lx)	3.2ft L x 1.7ft W (.97 m L x .52 m W)																			
3ft (.9 m)	31.5Fc (339.1lx)	6.3ft L x 3.3ft W (1.9 m L x 1 m W)																			
6ft (1.8 m)	7.88Fc (84.8lx)	19ft L x 9.9ft W (5.7 m L x 3 m W)																			

See page 64 for part numbers and descriptions