



BY SONANCE

NC3 | NC5QT

NATURAL COLLECTION QUICKSTART GUIDE

BOX CONTENTS

- (1) Quickstart Guide
- (1) NC3 or NC5QT Soundbar, Speaker, or Speaker Bar
- (1) Woven Fabric Grille
- (1) Z-Bracket for Soundbar Models or
- (2) Z-Brackets Vertical Speaker Models
- (1) Hardware Kit

INSTALLATION

1. Before mounting, remove the grille from the speaker. The grille is secured with a press-fit retention system along the edges and corners. Starting at one corner, gently pull along each edge to evenly release each connection point, then set the grille aside (see Figure 1).

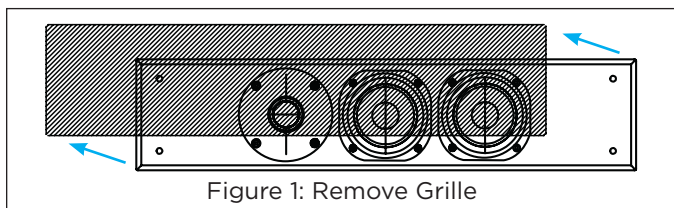


Figure 1: Remove Grille

NOTE: Natural Collection Speaker Z-Bracket Sizes (see Figure 2).

- VTL Speakers: 3.25" Z Bracket
- HTL 55" Soundbars: 36" Z Bracket
- HTL 65", 75", 85" Soundbars: 48" Z Bracket

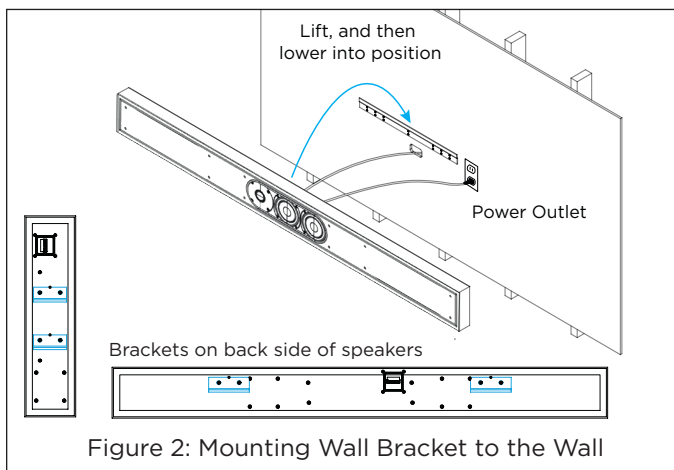


Figure 2: Mounting Wall Bracket to the Wall

2. Use a stud finder to identify stud locations for the Z bracket placement on the wall.
3. Level the wall Z bracket.
4. Secure the bracket to the wall using an appropriate drill and screw. Secure the Z bracket to the wall in

areas where the corresponding brackets are on the speaker to ensure a tight fit. Use supplied shims as needed.

5. Run speaker wire from the amp to the speaker. If running wire within the wall, make the entry cut within the area behind the speaker footprint.

IMPORTANT: Follow all applicable safety codes when running wire within wall cavities. Sonance does not recommend running high-voltage wiring within the wall.

6. Connect the speaker wire to the speaker terminals on the back of the speaker, matching polarity of positive to positive and negative to negative (see Figure 3).

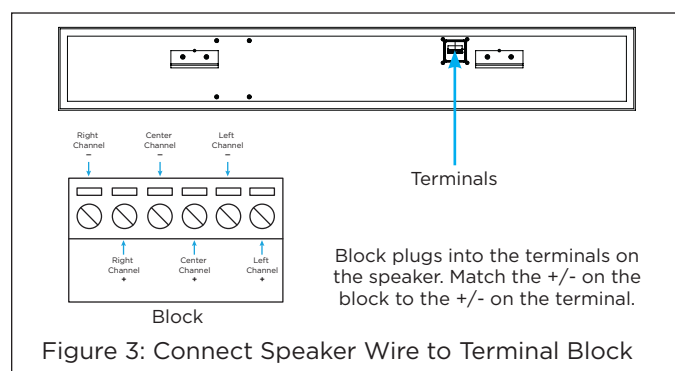


Figure 3: Connect Speaker Wire to Terminal Block

7. Lift the speaker into position, aligning the brackets on the back of the speaker with the Z brackets on the wall.
8. Lower the speaker into place until the brackets engage and the speaker is fully secured.

IMPORTANT: Do not release the speaker until you have confirmed it is fully engaged on the both wall brackets.

9. Reattach the grille by pressing each node along the corners and edges into place until fully seated (see Figure 4).

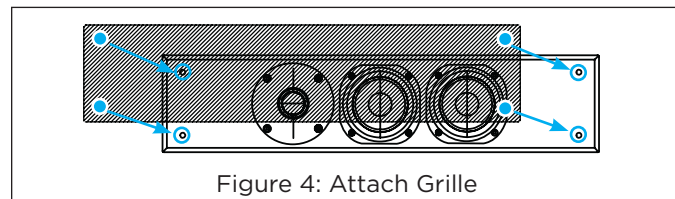


Figure 4: Attach Grille

©2026 Sonance. All rights reserved. Sonance is a registered trademark of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website: www.sonance.com

SONANCE • 991 Calle Amanecer • San Clemente, CA 92673 • (949) 492-7777
09.08.2026