



24VDC

NEW!

White Tunable FlexTape®

3W/ft.
(9.8W/m)

345 Lumens
per ft.
(1132 per meter)



Changing your light source's color temperature is easy with Tresco® White Tunable CCT FlexTape® lighting solution. Select between warmer lighting that highlights natural wood grains and earth tones or cool lighting to highlight whites; perfect for cabinet, task or accent lighting and store fixtures. The low profile and adhesive 3M™ backing give this LED lighting solution the versatility to install in a multitude of places. Eliminate the guesswork and get the LED that pairs perfectly with your general lighting and overall design.

Features:

115° beam angle

High output (345 lumens per ft.)

White tunable from 2700K-6500K

Sold in 16.4' (5 m) roll

Cuttable every 2" (50 mm)

No soldering required – simple FlexConnect connectors (sold separately)

Precision tunable remote controls (sold separately)

Typical Applications:

Under Cabinet

Interior Cabinets

Accent Lighting

Displays

Task Lighting

Store fixtures

Toe kick

Soffit

Backlighting

Cuttable every
2"
(50 mm)



2700K



3500K



6500K

Eliminate the guesswork and get the LED that pairs perfectly with your general lighting and overall design.




No soldering required – simple FlexConnect connectors (sold separately)



Strong 300 LSE 3M™ adhesive backing



Dimensions:

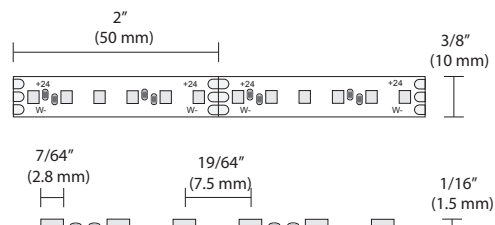


White Tunable FlexTape® can be used as a DIY option for flush and recessed Infinix. For other profiles, must be custom ordered.



1-800-227-1171 | trescolighting.com


Typical Setup:

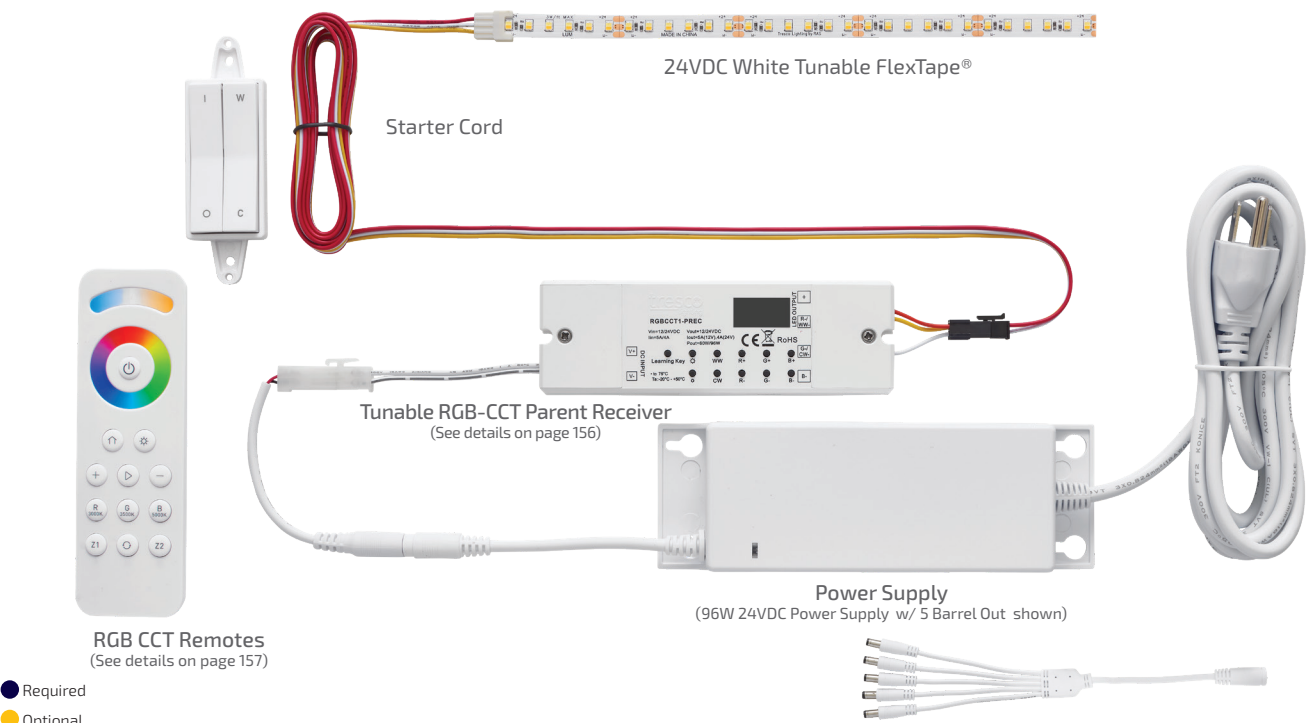

Accessories:



Power Supplies
see power supply section




RGB CCT Parent Receiver
L-RGBCCT1-PREC-1



Starter Cord
L-TPEPKT-2M-CCT-1
L-TPEPKT-2IN-CCT-1



RGB CCT Remotes
See page 157




6 Output Adaptor
L-4P60-1



RGB CCT Child Receiver
L-RGBCCT1-CREC-1



Back-to-Back Connector
L-TPE-BTB-CCT-1




Link Cord
L-TPELNK5-CCT-1
L-TPELNK15-CCT-1
L-TPELNK25-CCT-1
L-TPELNK60-CCT-1
L-TPELNK120-CCT-1
L-TPELNK180-CCT-1



DIY Wire & Terminal Block
L-CCTWIRE25-1
L-BS4PBL-1

Specifications:


Wattage	Lumens	Efficacy (lm/W)	Input Voltage	Diode Life	Max Per Power Supply 96W	Max Continuous Run	Mounting	Warranty	Beam Angle
3W/ft. (9.8W/m)	345 per ft. (1132 per m)	115	24VDC	50,000 Hours	30'(9m)	16.4' (5 m)	Surface	5 Year	
Photometric Data					Color Temperature				
	Height	Light Output	Beam Area	 2700K3000K4500K5500K6500K Warm (2700K)Daylight (6500K)					
	1ft (.3 m)	114Fc (1227lx)	3.2ft L x 3ft W (.97 m L x .91 m W)						
	3ft (.9 m)	12.7Fc (136.7lx)	9.7ft L x 9ft W (2.9 m L x 2.7 m W)						
	6ft (1.8 m)	3.17Fc (34.1lx)	19.4ft L x 18.1ft W (5.9 m L x 5.5 m W)						
L-FLXTPE-24CCT-1 Tested at 4600K									

Tunable Tape

All product dimensions and specifications are subject to change without prior notice.

● Required
● Optional

● 24VDC White Tunable FlexTape®



Part

Description

L-FLXTPE-24CCT-1

24VDC 3W/FT CCT FlexTape® 16.4' (5 m) Roll

Maximum continuous run is 16.4' (5 m). Maximum per power supply is 12VDC: 20' (6 m), 24VDC: 30' (5 m). Mounts with adhesive backing. 12VDC is cuttable every 1" (25 mm), 24VDC is cuttable every 2" (50 mm). To be used on clean, smooth surfaces. Pressure must be applied for proper 3M™ tape adhesion.

● 24VDC Power Supplies



Part

Description

L-24DCELT96-1

96W 24VDC Power Supply w/ 5 Barrel Out - White†

L-24DCELT48-BL-1

48W 24VDC Power Supply w/ 5 Barrel Out - Black†

L-24DCELT15WP-1

15W 24VDC Wall Mount Power Supply w/ Snap Connector*†

L-24DCH96X1-1

96W 24VDC Dimmable Hardwire Power Supply*§

L-24DCH96X3-1

288W 24VDC Dimmable Hardwire Power Supply*§

L-1BRL5-1


Extra 5 Output Barrel Splice

*Does not come with 5 Output Barrel Splice

†Dimmable on trailing edge (24VDC side)

§Dimmable by LED line voltage (120V) wall dimmers

● 12/24VDC CCT Starter Cord

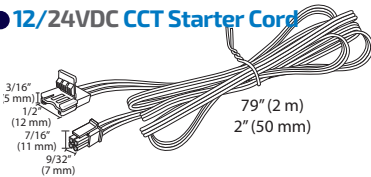

Part

Description

L-TPEPKT-2M-CCT-1

2 m (79") FlexTape CCT Starter Lead


L-TPEPKT-2IN-CCT-1

50 mm (2") FlexTape CCT Starter Lead

5/8" (16 mm) hole required.

Maximum linear run of White Tunable FlexTape® LED from one starter cord is 16.4' (5 m).

● 12/24VDC RGB-CCT Receivers

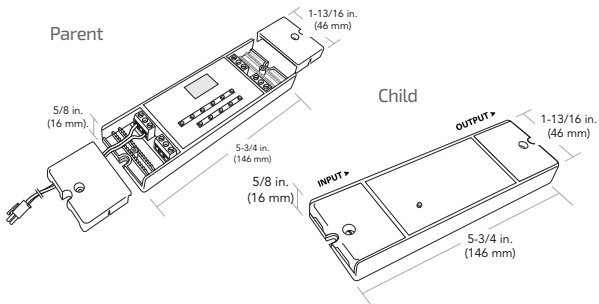

Part

Description

L-RGBCCT1-PREC-1

12/24VDC RGBCCT Parent Controller/Receiver


L-RGBCCT1-CREC-1*

12/24VDC RGBCCT Child Controller/Receiver

*Child Receiver is optional

6 output adaptor sold separately

● 12/24VDC RGB-CCT Remotes

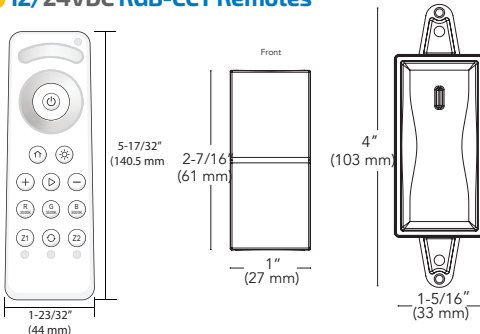

Part

Description

L-RGBCCT-RMT-1

RGBCCT Wireless Remote


L-WLD-CCT-WH-1

CCT FREEDiM Deco Wall Dimmer White

L-WLD-RGB-WH-1

RGB FREEDiM Deco Wall Dimmer White

● 12/24VDC Starter CCT Extension Leads



Part

Description


L-CCTEXT-60-1

60 cm (24") CCT FlexTape Starter Extension Lead

L-CCTEXT-120-1

120 cm (48") CCT FlexTape Starter Extension Lead

● 12/24VDC CCT Back-to-Back Connector




Part

Description

L-TPE-BTB-CCT-1

CCT FlexTape® Back-to-Back Connector

● 12/24VDC 6 Output Adaptor

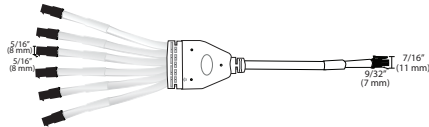


Part

Description

L-4P60-1

4 Position, 6 Output Adaptor - White

● 12/24VDC CCT Link Cords

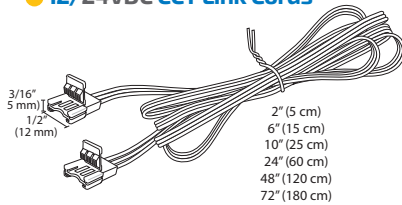

Part

Description

L-TPELNK5-CCT-1

5 cm (2") CCT FlexTape® Link Cord

L-TPELNK15-CCT-1

15 cm (6") CCT FlexTape® Link Cord

L-TPELNK25-CCT-1

25 cm (10") CCT FlexTape® Link Cord

L-TPELNK60-CCT-1

50 cm (24") CCT FlexTape® Link Cord


L-TPELNK120-CCT-1

120 cm (48") CCT FlexTape® Link Cord

L-TPELNK180-CCT-1

180 cm (72") CCT FlexTape® Link Cord

● 12/24VDC CCT DIY

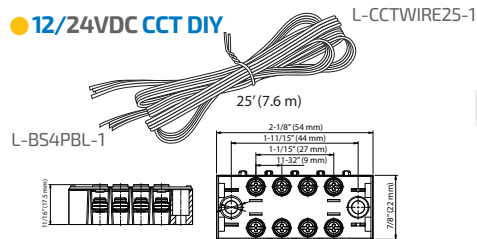

Part

Description

L-CCTWIRE25-1

25' (7.6 m) 20AWG CCT Wire Roll

L-BS4PBL-1

12/24VDC Barrier Splice 4 Position Black