ASSEMBLY AND INSTALLATION INSTRUCTIONS


H0047

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.


NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Parts:

Parts Number (4589MM)

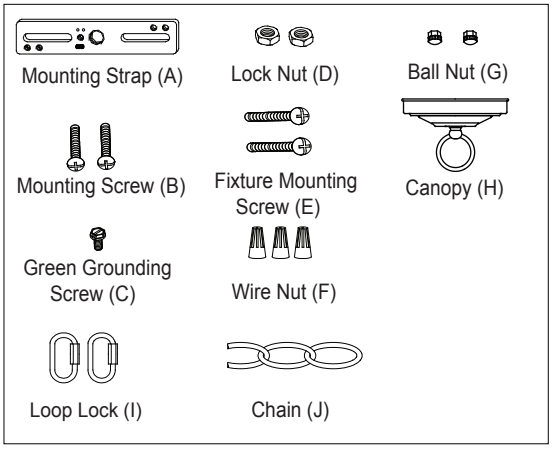

Parts Number (9376FO)




Glass Shade (K) (X3)

Parts Number (4588SS)




Set Screw (L) (X9)

1. Thread two fixture mounting screws to the mounting strap, and secure them with two lock nuts. Adjust the length of the fixture mounting screws if necessary.
2. Attach the mounting strap to the outlet box by using two mounting screws.
3. Screw the top assembly into the coupling on the main fixture body.
4. Secure the loop onto the stem of top assembly.
5. Choose the length of the chain you need, then weave the fixture wire and the fixture grounding wire through the chain. Then connect one end of the chain with the loop by using the loop lock.
6. Thread the fixture wire and fixture grounding wire through the top loop, canopy, and mounting strap.
7. Connect the other end of the chain with the top loop by using the loop lock.
8. Pull out the outlet wires and house grounding wire from the outlet box. Make wire connections using the wire nuts:
   ---The smooth wire (marked) from the fixture to the black wire from the power source.
   ---The ridged wire (unmarked) from the fixture to the white wire from the power source.
   ---Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.
   Carefully put the wires back into the outlet box.
9. Attach the canopy to the mounting strap by inserting the two fixture mounting screws, then secure it with two ball nuts.
10. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
11. Attach the glass shades to the glass brackets by threading set screws onto the glass notches. (Do not over tighten.)
12. Turn on the power at the main fuse or circuit breaker box.

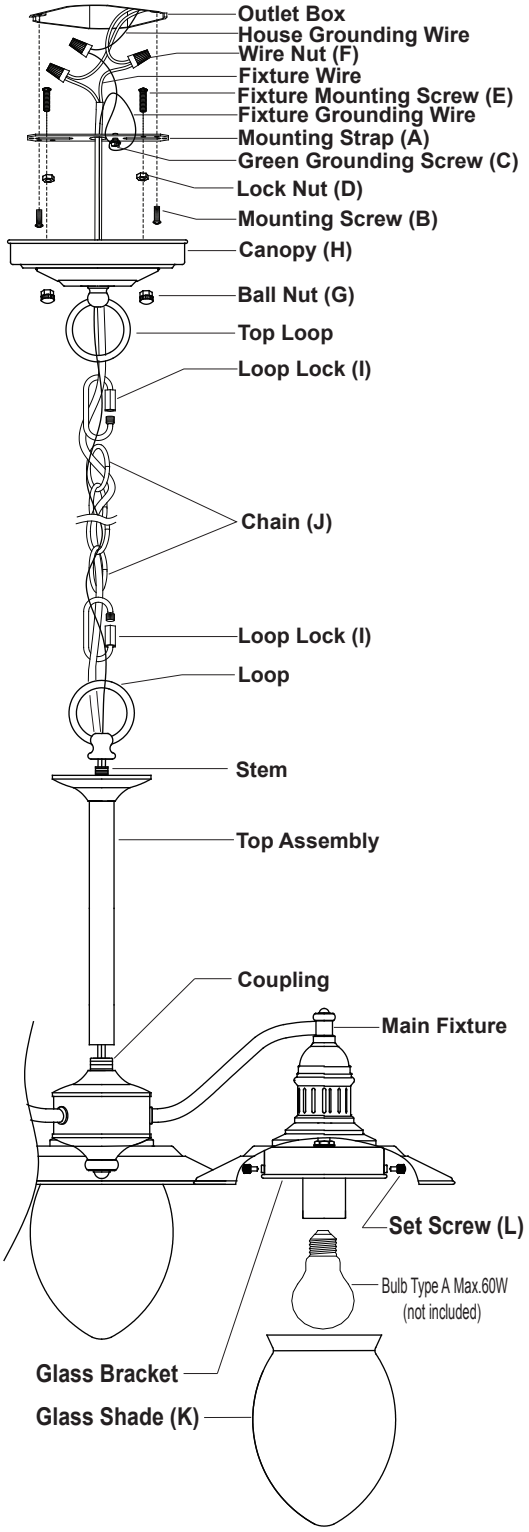

VAXCEL

121121

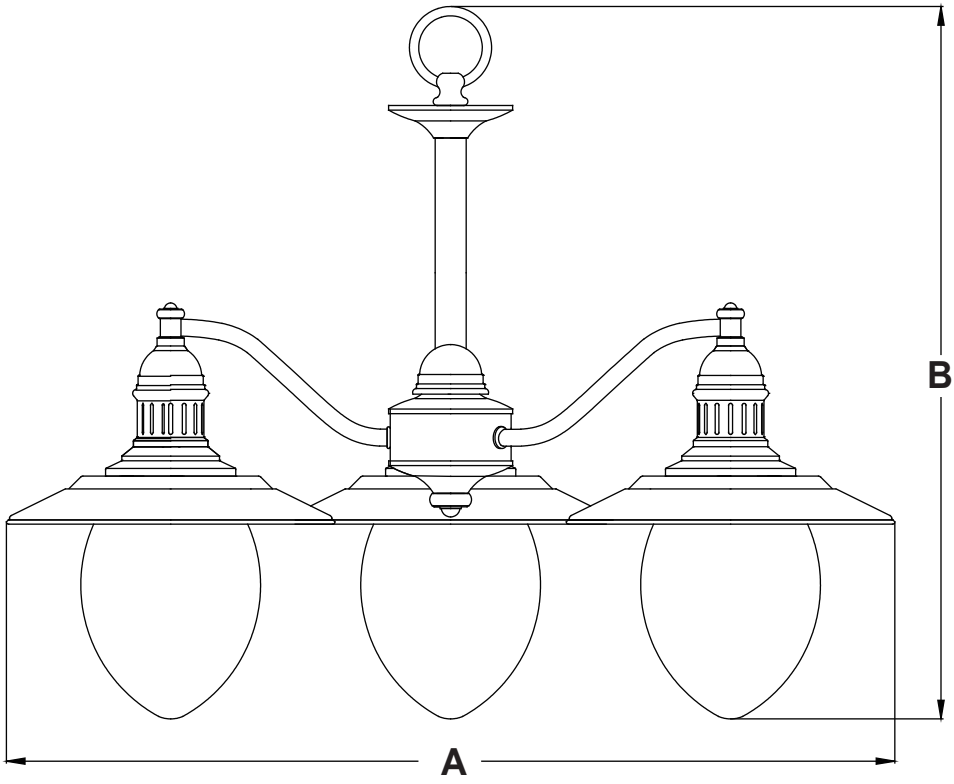

A: 23-1/2"

B: 19-1/4"

VAXCEL

121121