


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0328 / C0329

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE:** 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. Read and save this instructions.

## Hardware Package (included):

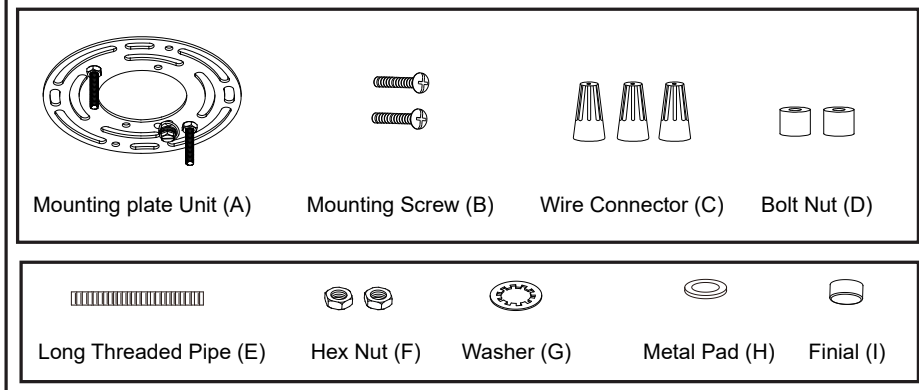


## Installation Steps


Turn off the power at fuse or circuit box

1. Attach the mounting plate unit (A) to the outlet box by using two mounting screws (B).
2. Attach the fixture to the canopy by using threaded pipe.
3. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
  - Connect the hot wire (black insulation) from the fixture to the black wire from the power source.
  - Connect the neutral wire (white insulation) from the fixture to the white wire from the power source.
  - Attach the fixture ground wire (bare wire) to the mounting plate unit (A) with the green ground screw, then connect it to the house ground wire with the wire connector (C).Carefully put the wires back into the outlet box.
4. Attach the canopy to the mounting plate unit (A) by inserting the fixture mounting screws, then secure it with two bolt nuts (D).
5. Install 2 x 60W medium base bulbs (not included). **See relamping label at socket area or packaging for maximum wattage allowed.**
6. Attach the long threaded pipe (E) to fixture, then secure the preinstalled hex nut (F) and washer (G).
7. Attach the hex nut (F) and the metal pad (H) to the long threaded pipe (E), slip the acrylic diffuser up through the long threaded pipe (E), then secure them with the finial (I).

Turn on the power at fuse or circuit box

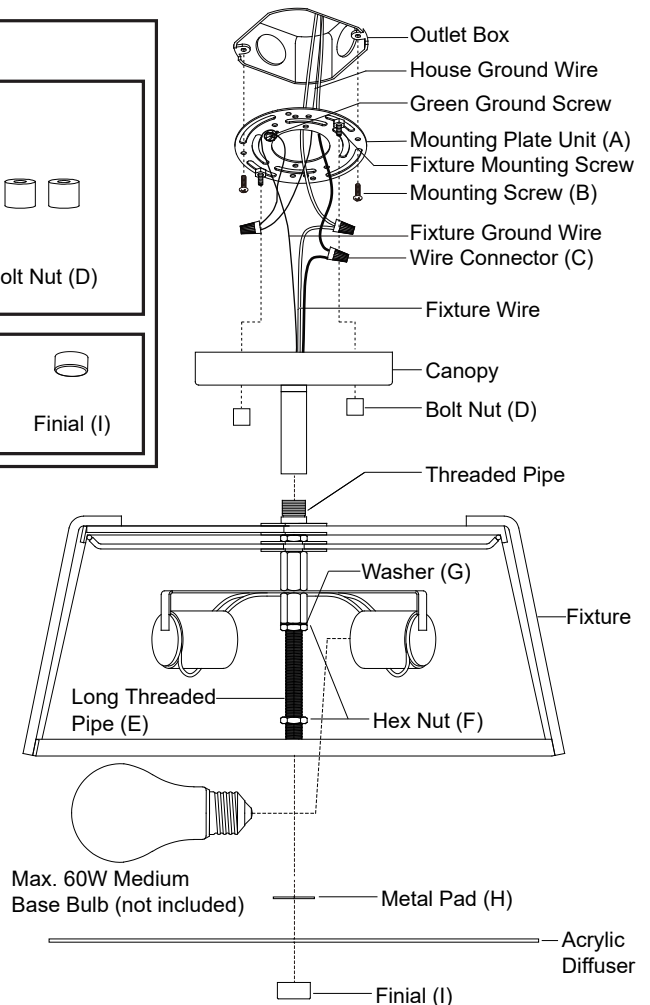

The following parts are available for reorder if damaged or missing.



Mounting plate Unit (A)    Mounting Screw (B)    Wire Connector (C)    Bolt Nut (D)




Long Threaded Pipe (E)    Hex Nut (F)    Washer (G)    Metal Pad (H)    Finial (I)

→ Mounting Hardware  
7033MM (1SET) for C0328  
7031MM (1SET) for C0329

→ Mounting Hardware  
7034AA (1SET) for C0328  
7032AA (1SET) for C0329

Acrylic Diffuser  
7211PP

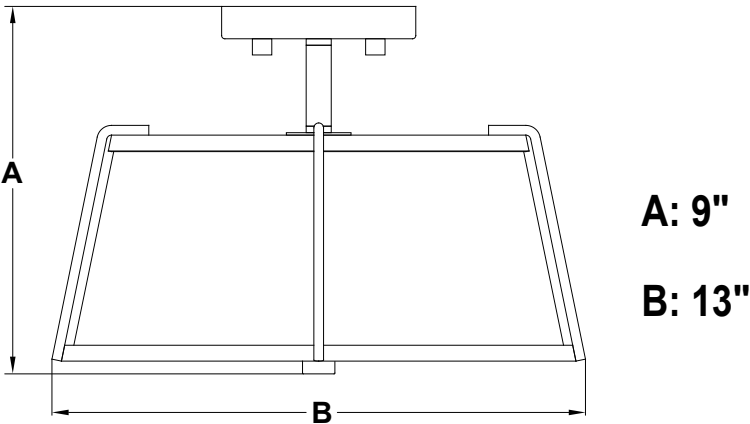

1 Year Warranty

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

*Exclusions: This warranty does not include the failure of products from extreme acts of nature; environmental conditions not suited for the products intended use; operation in temperatures outside of the range specified in the instruction manual; usage with improper power supply, power surges or dips. For coastal locations, some corrosion is considered normal for the environment.*

*Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.*

How can warranty service be obtained?  
info@vaxcel.com  
1-800-482-9235