

# CLRv3-Select

Commercial Recessed LED Downlight

**NICOR<sup>®</sup>**






# CLRv3-Select


## Commercial Recessed LED Downlight

Designed for both new construction and retrofit applications, the CLR Select series can be installed directly into drywall, a ceiling grid or an existing 4", 6" or 8" mounting frame using spring loaded retention tabs. The CCT and output selectable design allows for easy adjustment to 3000, 3500, 4000, or 5000K and standard, medium or high output. With Standard and Low Output models available, the lighting can be easily tailored to match the space or meet rebate levels. With accessory trims in black and offering a full range of dimming via 1-10 volts, the CLR Select is adaptable to most any environment. The versatility of this light source is perfect for commercial applications, such as educational, governmental, retail and grocery, office or hospitality lighting.

### Dimensions

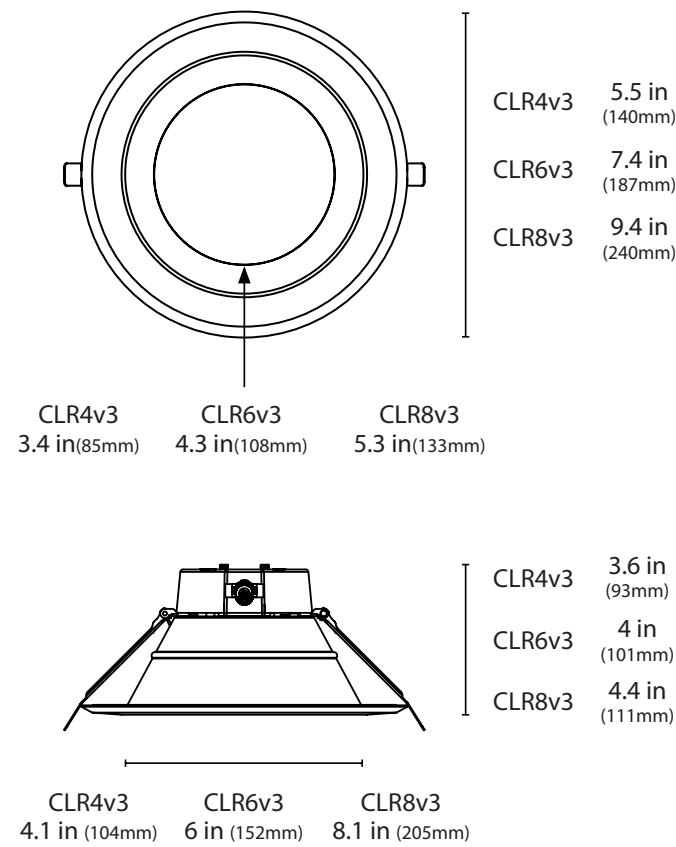

## FEATURES

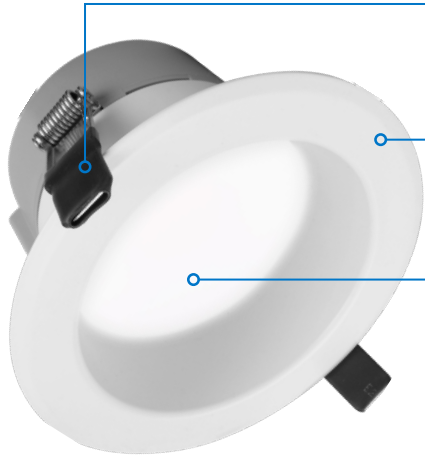

### Easy Installation

Adjustable, spring loaded retention tabs ensure fixture retention on ceilings up to 1.5" thick

### Finish

Matte white powder coat finish with optional black faceplate available

### Optical


Precision engineered polystyrene diffuser provides high uniformity and reduced glare

### Selectable CCT

4 CCT selection (3000K, 3500K, 4000K, or 5000K) switch located on the backside


### Selectable Lumen Output

3 Wattage selection (Standard, Medium, High) switch located on the backside to control lumen output



### Low Lumen Output Available

The CLRv3 Select can be easily tailored to match the space and meet rebate levels

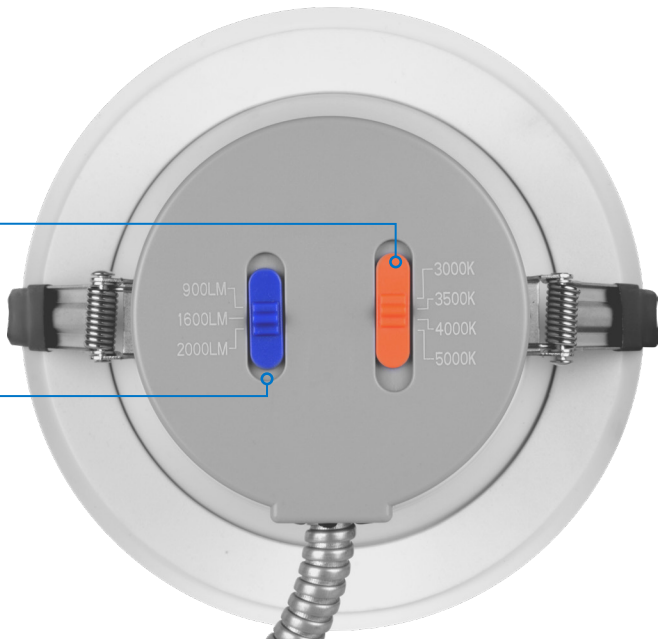

CRI >93  
R9 >61



Lumens(S)  
806-3692



Lumens(L)  
806-3692




Lifetime  
>72,000 hrs



Beam Angle  
83°- 94°

### Black Trims

4", 6", and 8"



Ordering Information								Example: CLR63SUS9WH	
Series	Diameter	Version	Wattage	Voltage	CCT	CRI	Color		
CLR	4 (4 inch)	3 (v3.0)	S (Selectable)	U (120-277V)	S (Selectable)	9 (90 CRI)	WH (White)		
	6 (6 inch)		S (Selectable Low Lumen)						
	8 (8 inch)								

Specifications and dimensions subject to change without notice.

Recommended Dimmers*	
Lutron NTSTV-DV-WH	Cooper SF10P
Lutron DVSTV	Legrand RH4FBL3PW

\*Not a complete list. Check compatibility before installation

Accessories	Accessories sold separately
Black 4" Trim	CLR43-TR-BK
Black 6" Trim	CLR63-TR-BK
Black 8" Trim	CLR83-TR-BK
3", 4", 6" Rough-in Flat Template	ROUGHIN-TEMPLATE-346
8" Rough-in Template	ROUGHIN-TEMPLATE-8
4" Rough-in Frame	DLE4-ROUGHIN-FRAME
6" Rough-in Frame	DLE6-ROUGHIN-FRAME
3", 4", 6" Rough-in Frame	MULTIFRAME-346-1
Emergency Battery Backup	EMI200-1-UNV
Bluetooth Wireless Controls	NLCDOWN1

Additional trim finishes available based on MOQ of 300 units, subject to 90+ day lead time.





#### WAREHOUSE LOCATIONS:

Albuquerque, NM  
Buford, GA  
Roseville, CA

NICOR Lighting  
2200 Midtown Place NE Albuquerque, NM 87107 USA  
[www.nicorlighting.com](http://www.nicorlighting.com) | T. 800-821-6283 F. 800-892-8393

