
ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0274

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Hardware Package (included):

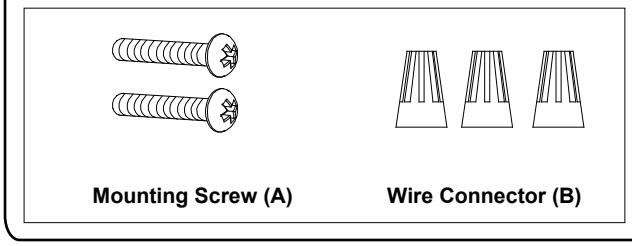

Installation Steps


Turn off the power at fuse or circuit box.

1. Attach the two mounting screws (A) to the holes on outlet box, thread them in part way: 2 to 3 turns only.

2. Connect the black wire to black (power) wire, white wire to white (neutral) wire and copper wire or green / yellow wire to ground wire with supplied wire connectors (B). Tuck all wires into outlet box.

3. Attach the ceiling pan to the outlet box by inserting two mounting screws (A) head into the key holes, then rotate the ceiling pan until it is locked in place, finally secure the mounting screws tightly with screwdriver (not included).

4. Attach the plastic shade to the ceiling pan by aligning studs and slots, then turn it clockwise until it is locked in place.

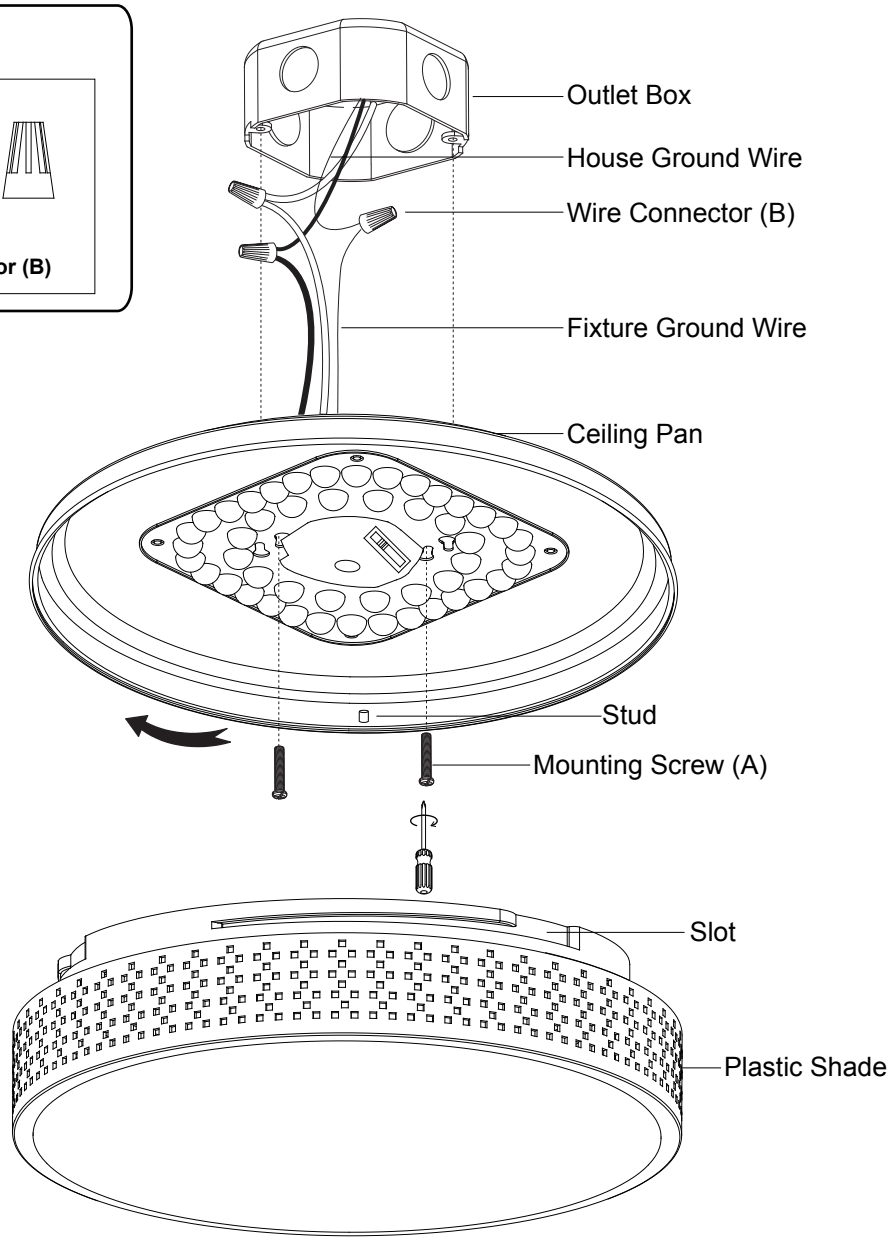


Turn on the power at fuse or circuit box.

VAXCEL

220720

Adjusting the Correlated Color Temperature (CCT) of the Light

Customize the correlated color temperature (CCT) of the LED light by moving the toggle switch.

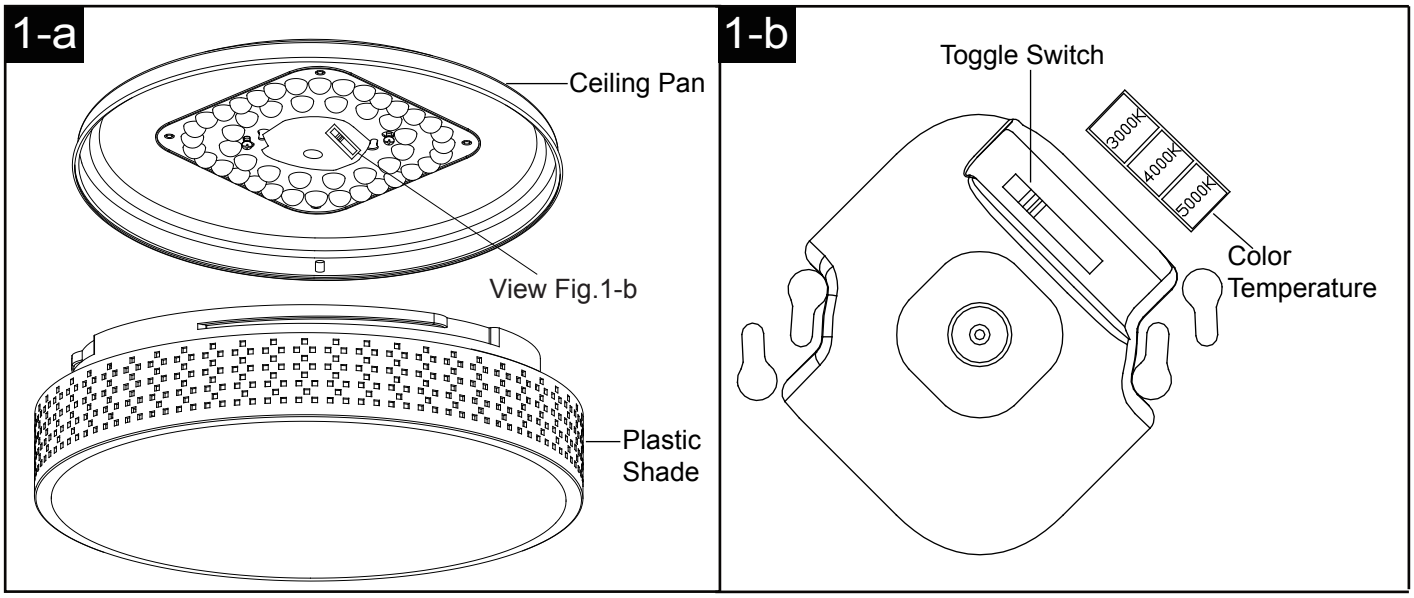



a. Move the toggle switch to 3000K, the color temperature is set at 3000K.
b. Move the toggle switch to 4000K, the color temperature is set at 4000K.
c. Move the toggle switch to 5000K, the color temperature is set at 5000K.

Notice: Please move the toggle switch to make your selection before attaching plastic shade to the ceiling pan.

The following parts are available for re-order if damaged or missing.

Spare Parts List:

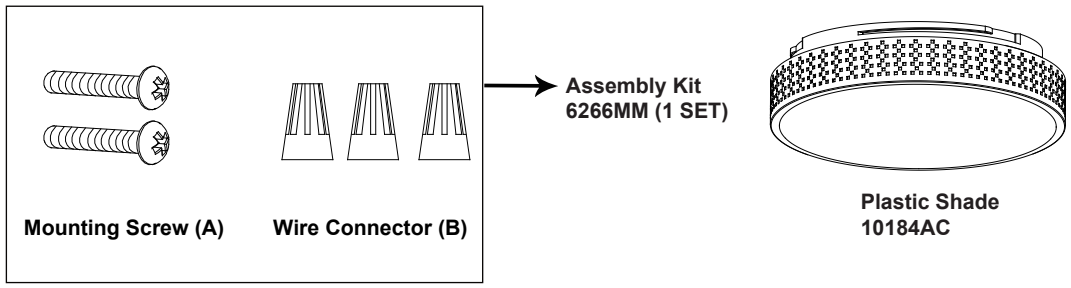

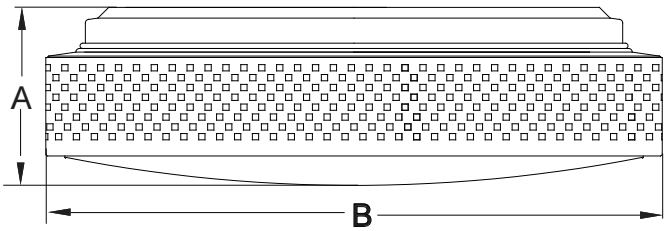

A: 4"

B: 13-1/2"

VAXCEL

220720