



# Natural Cork Underlayment 3 mm


## 72008Q

### INSULATING

Reduces thermal transmission, increasing effectiveness of floor heating systems

### CRACK SUPPRESSION

Acts as a crack isolation membrane that resists transfer of stress cracks from suboor through to flooring surfaces

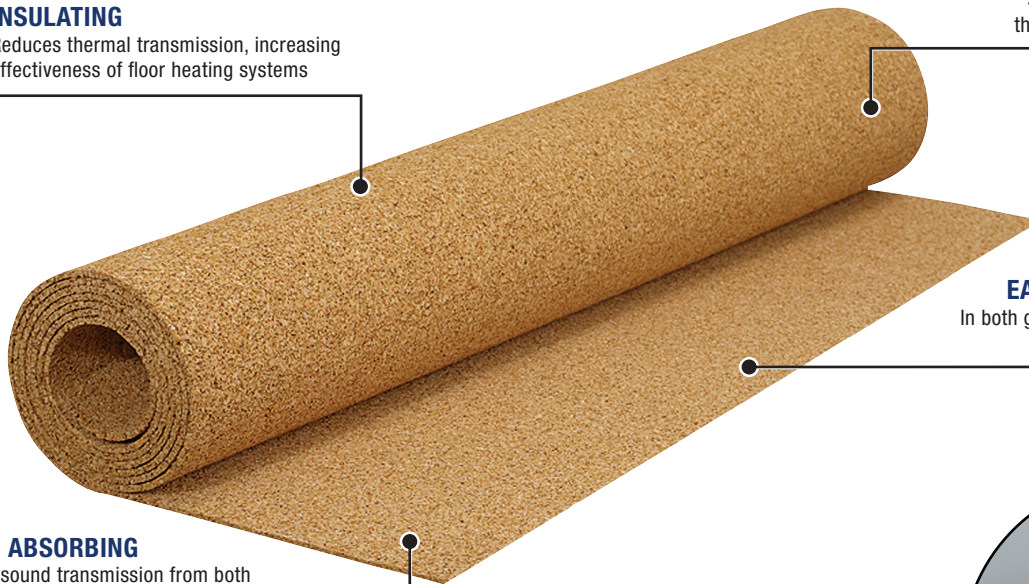

### EASY TO INSTALL

In both glue-down and loose lay configurations\*\*

### SOUND ABSORBING

Reduces sound transmission from both the surface of a floor as well as through the floor to living spaces below

**IIC STC**  
61\* | 59\*

\*Ceramic tile on a 6" concrete slab

### VERSATILE

For use under ceramic tile, stone, marble, glued wood flooring and floating floor systems



\*\*For a list of recommended adhesives to use for glue-down installations, please go to [qep.com](http://qep.com) or call 866-435-8665.

| ITEM # | DESCRIPTION      | QTY    | SIZE    | COVERAGE                   |
|--------|------------------|--------|---------|----------------------------|
| 72008Q | 1/8" (3 mm) Roll | 1 Roll | 48"x50' | 200 ft <sup>2</sup> / roll |



Our Natural Cork products may contribute towards satisfying credits under the LEED® Green Building Program in the following areas:

- MR 4.1 - 5% Recycled Content of total building materials (post consumer + 1/2 of post industrial)
- MR 4.2 - 10% Recycled Content of total building materials (post consumer + 1/2 of post industrial)
- MR 6 - Specifying rapidly renewable building materials for 5% of total building materials.
- EQ 4.1 - Low Emitting Materials Adhesives & Sealants (Adhesives Specified meet SCAQMD Rule 1168)

Professional Tools for Professional Results

[qep.com](http://qep.com)

M0525-12579