

NICOR®




OWR4 LED Wall Pack

OWR4

LED Wallpack

The OWR4 LED Wallpack combines a simple rectangular style with top performance and efficiency. The OWR4 features a single-piece, die-cast aluminum housing with a ribbed, UV- and fire-resistant lens for even light distribution. It installs easily into a 4/O J-Box. The OWR4 is recommended for perimeter lighting as well as building entrances, garages, tunnels, other commercial spaces where general purpose lighting is desired. The OWR4 offers selectable wattages (High/Med/Low) and selectable CCT (3000K/4000K/5000K). Factory mounted photocell standard.

Dimensions

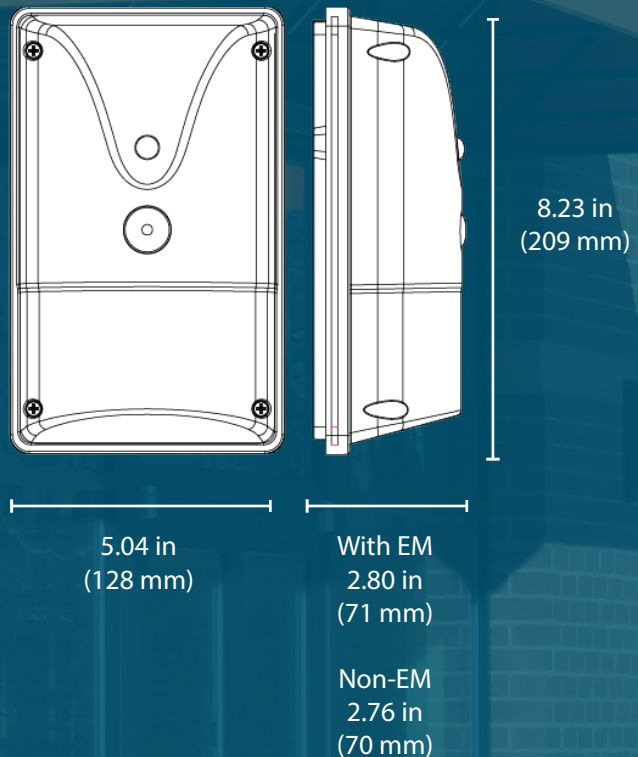

FEATURES



Factory-mounted Photocell

Enables automatic dusk-to-dawn operation.

Emergency Test Button

EM model available with integrat 3.9W emergency driver

Ribbed Polycarbonate Lens

UV- and Fire-resistant lens for even light distribution

Durable and Secure Housing

Rated IP65 housing, supports wet-location installations



Available in two models

Choose between the 15W Single Select with Emergency back up battery or the 20W Double Selectable Wall Pack

15W CCT Select with EM: **3K** **4K** **5K**

20W Double Select: **3K** **4K** **5K**

LOW **MED** **HIGH**



CRI
80+



Lumens
1,949 – 2,003



Lifetime
>54,000 hr



Beam Angle
125°



Dimmable
0-10VDC

Ordering Information

Example: OWR4015US8BZE

Series	Version	Wattage	Voltage	CCTs	CRI	Finish	Emergency*
OWR	4	015 (15W)	U (120-277V)	S (3000/4000/5000K)	8	BZ (Bronze)	_ (Non EM)
		02oS (20/15/10W)					E (Emergency Battery)

Specifications and dimensions subject to change without notice.

*15W: Only available with emergency option; 20W: Not available with emergency



©2026 NICOR® • ALL RIGHTS RESERVED

Warehouse Locations

Albuquerque, NM · Buford, GA · Roseville, CA

2200 Midtown Place NE Albuquerque, NM 87107 USA · nicorlighting.com
T. 800-821-6283 F. 800-892-8393