versatile™ 4C Surface Mount Collar, SM09D

32⅜" ACTUAL

17¹¹⁄₁₆" ACTUAL DEPTH

34¹⁵⁄₁₆" ACTUAL

26¹⁄₁₆" FROM FINISHED FLOOR TO BOTTOM OF COLLAR

FINISHED FLOOR
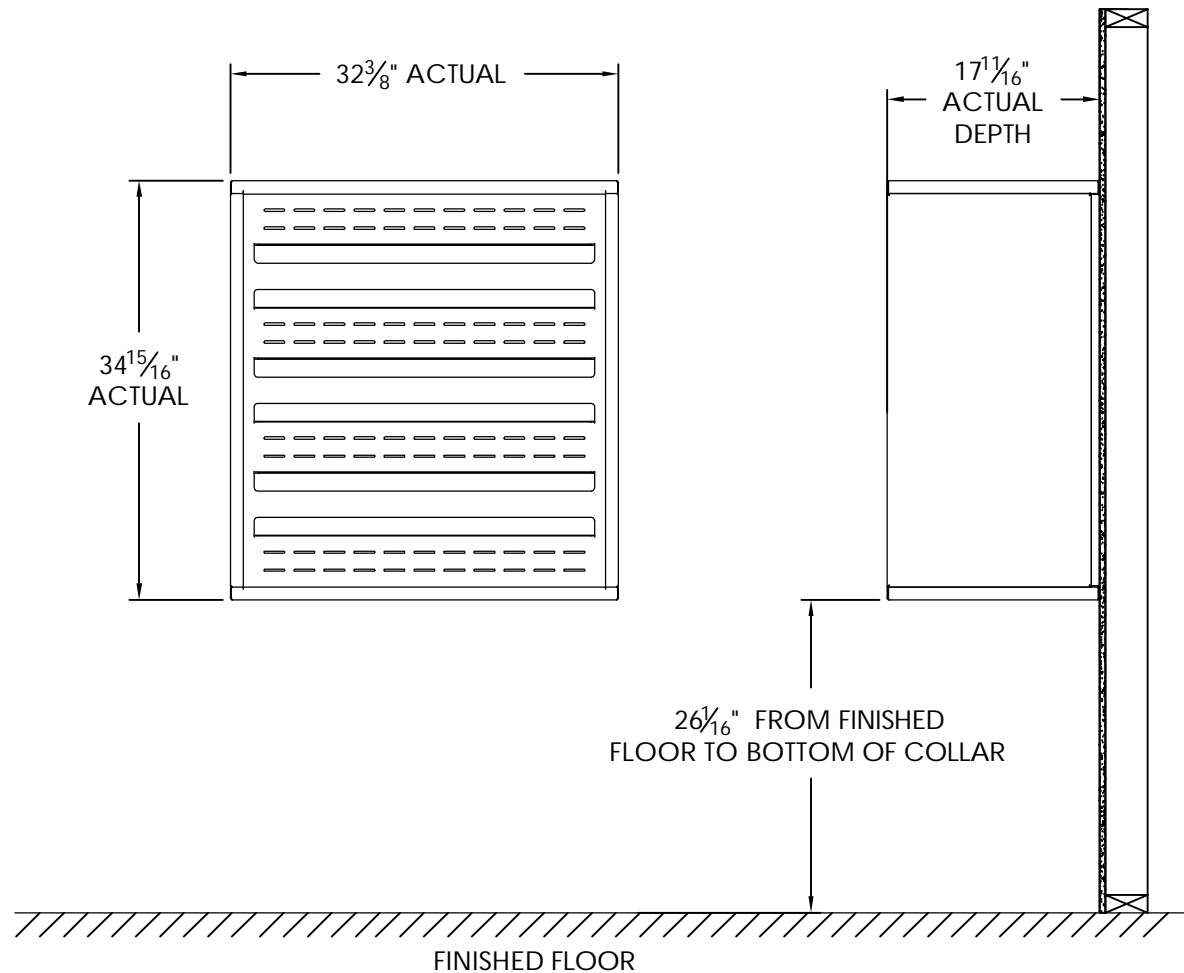
Notes:
1. Designed to mount Florence Versatile™ 4C mailbox double column 9-High Suite modules (sold separately).
2. For use with front loading modules only.

versatile™ 4C Mailbox, 4C09D-4P

31 9/16" ACTUAL
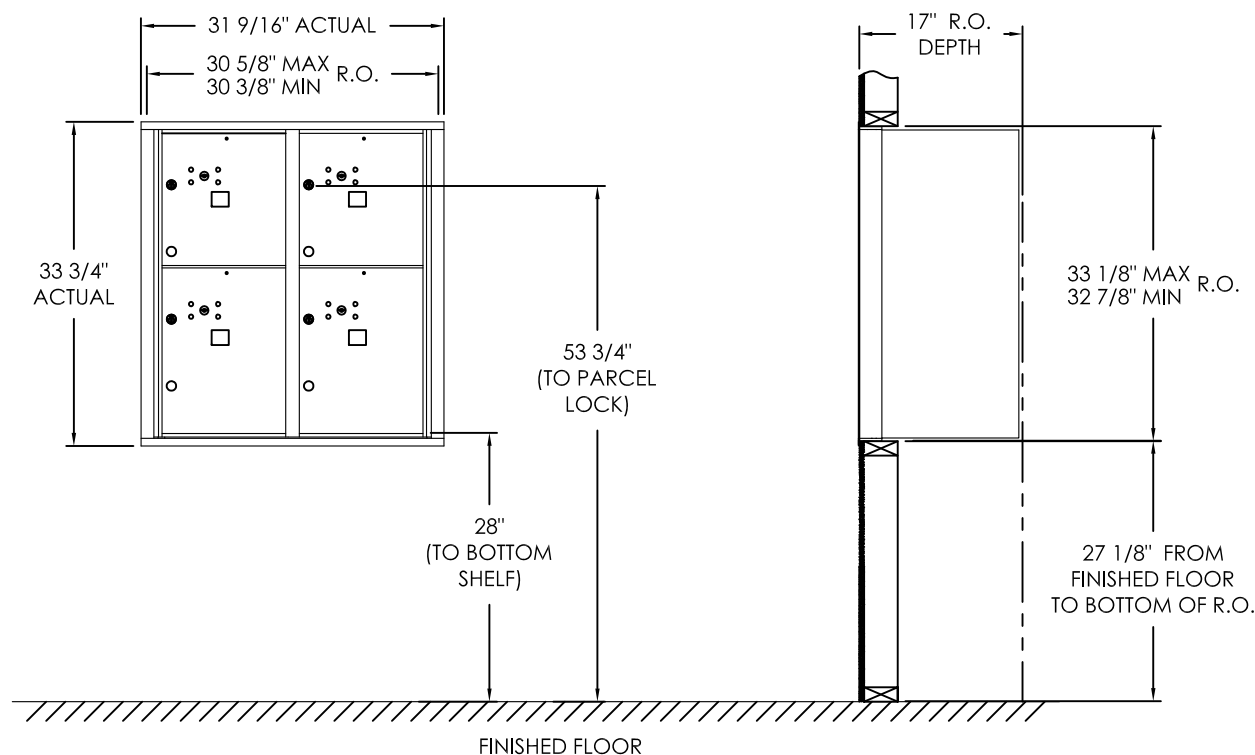
30 5/8" MAX R.O.
30 3/8" MIN

33 3/4" ACTUAL

53 3/4"
(TO PARCEL LOCK)

28"
(TO BOTTOM SHELF)

FINISHED FLOOR

17" R.O. DEPTH

33 1/8" MAX R.O.
32 7/8" MIN

27 1/8" FROM
FINISHED FLOOR
TO BOTTOM OF R.O.

COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
PARCEL	PL4	13-1/2" H x 12" W x 15" D	2
PARCEL	PL5	17" H x 12" W x 15" D	2

Notes:
1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
   a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
   b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
   c. No patron (tenant) lock shall be positioned more than 67" AFF.
   d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
   e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
2. This 4C mailbox can also be used for private applications.
3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator: www.florencemailboxes.com/configurator.

PRODUCT SERIES: VERSATILE™ 4C FRONT LOAD MAILBOX

FLORENCE CORPORATION

5935 Corporate Drive • Manhattan, KS 66503
800.275.1747 • www.florencemailboxes.com

MODEL	4C09D-4P	REV	E
SCALE	NONE	LAST REV DATE	07/02/19
DRAWING NUMBER	4C09D-4PCS	DRAWN BY	RAK