

19014A-LED

4" Shallow New Construction Housing

Product Description

The 19014A-LED is a compact and efficient shallow recessed housing, boasting a slim profile of just 3.5 inches, specifically designed for 4" shallow insulated ceilings. This ultra-thin construction is ideal for tight plenum spaces where depth is limited, ensuring easy installation without compromising on performance. With an insulated ceiling rating and an air-tight design, this housing guarantees optimal performance and energy efficiency. Constructed from durable galvanized steel, it offers long-lasting quality. The 19014A-LED features quick-connect wiring for easy installation of LED downlights, along with a pre-installed real nail for straightforward installation on standard wood lumber or engineered wood lumber. Its adjustable bar hangers, ranging from 13-5/8" up to 25", can be repositioned 90 degrees on the plaster frame, providing versatility for various installation needs.

Housing

- Galvanized steel construction. The housing can be removed from the plaster frame to provide access to the junction box

Junction Box

- Listed for through-branch circuit wiring
- Contains one 1-1/8", one 5/8", three 7/8" knockouts, and four Romex pryouts with strain relief
- Quick connect wiring for easy installation

Bar Hanger

- Pre-installed real nail for easy installation for standard wood lumber or engineered wood lumber
- Bar Hanger are adjustable length from 13-5/8" up to 25" and can be repositioned 90 degree on the plaster frame

Listings

- cULus Listed for damp locations
- cULus Listed for feed-through
- Certified under ASTM-E283 for Airtight constructions

Warranty


- 1-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge.) For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Project _____


Catalog _____

Type _____


Date _____

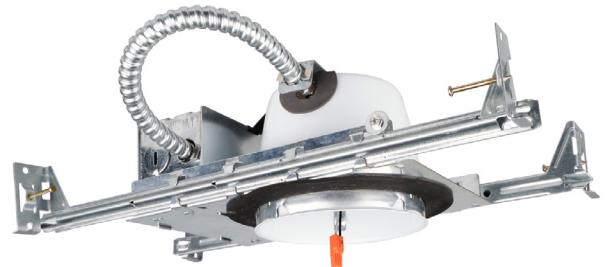

IDEAL connector



Swivel Foot upto 90°

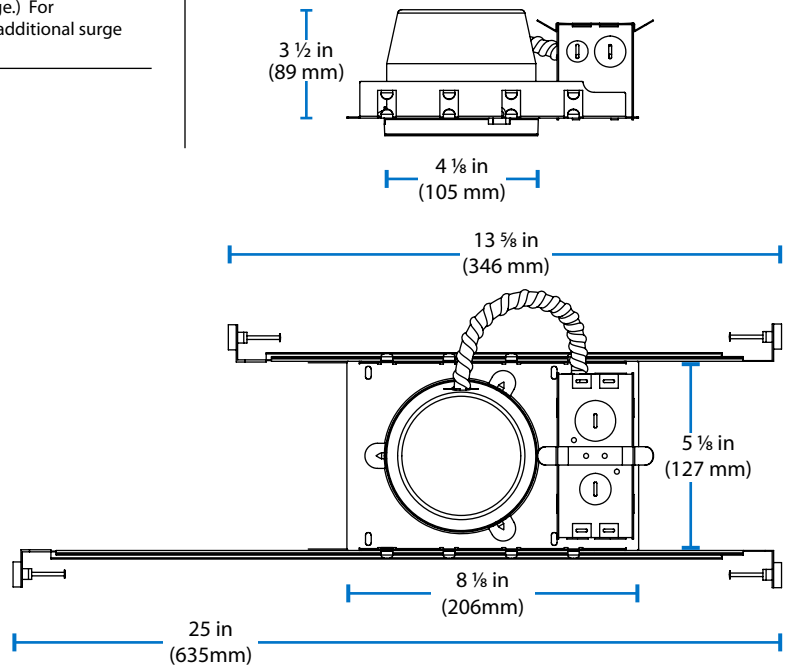

Ordering

Ordering Information

Example: 19014A-LED

| Series | Product Description |
|------------|--|
| 19014A-LED | 4" IC-Rated, Airtight, Line Voltage New Construction Housing |

Specifications and dimensions subject to change without notice. Please refer to the website for the most up-to-date information.