
MEN


RGB & CCT LED FlexTape® Connectors

RGB 12VDC & 24VDC 4.4W/ft. • CCT 12VDC & 24VDC 3W/ft.


How to Connect:Back-To-Back Connectors

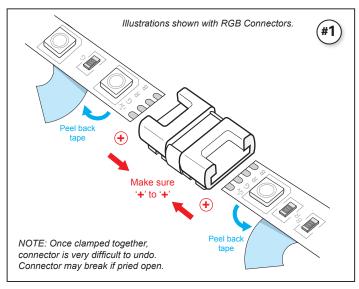


Peel back FlexTape® backing. Be sure to match polarity (+ to +)

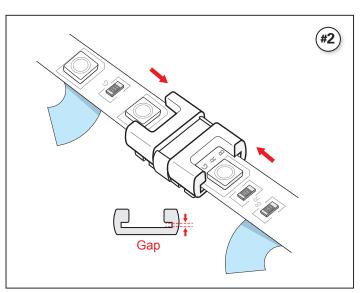

Insert FlexTape® into slots on both ends until fully seated

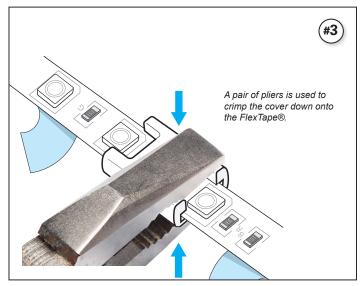

Clamp down cover slowly and CAREFULLY

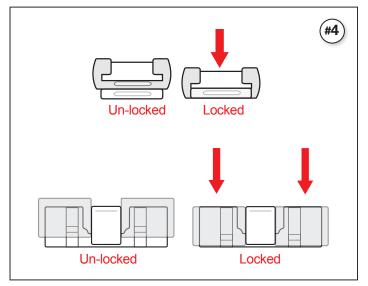


Make sure connector cover is locked down evenly

| RGB | | | CCT | | |
|-------------------|---|--------------------------------------|--------------------------|--|--------------------------------------|
| Part Number | Description | Connector Dimensions: (I x w x h) | Part Number | Description | Connector Dimensions: (I x w x h) |
| L-FLXRGB-SLD-xx-1 | FlexTape/RGB, Starter Lead | 22.3 mm x 13.9 mm x 7 mm | L-FLXCCT-SLD-xx-1 | FlexTape/CCT, Starter Lead | 22.3 mm x 13.9 mm x 7 mm |
| L-FLXRGB-SXT-xx-1 | FlexTape/RGB, Starter Extension Cord | 22.3 mm x 13.9 mm x 7 mm | L-FLXCCT-SXT-xx-1 | FlexTape/CCT, Starter Extension Cord | 22.3 mm x 13.9 mm x 7 mm |
| L-FLXRGB-LNK-xx-1 | FlexTape/RGB, Link Cord | 22.3 mm x 13.9 mm x 7 mm | L-FLXCCT-LNK-xx-1 | FlexTape/CCT, Link Cord | 22.3 mm x 13.9 mm x 7 mm |
| L-FLXRGB-BTB-1 | FlexTape/RGB, Back-To-Back Connector | 18.5 mm x 13.8 mm x 7 mm | L-FLXCCT-BTB-1 | FlexTape/CCT, Back-To-Back Connector | 18.5 mm x 13.8 mm x 7 mm |
| | | | | | |
| S | tarter Leads are available in lengths of: | 2" (50 mm), 79" (2 m); Starte | er Extensions are availa | ble in lengths of: 24" (60 cm), 48" (120 c | m); and |

RGB 12VDC & 24VDC 4.4W/ft. • CCT 12VDC & 24VDC 3W/ft.


How to Connect: Starter, Extension & Link Connectors

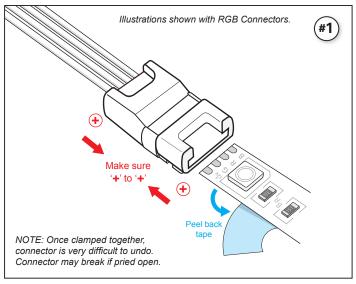


#2

Peel back FlexTape® backing. Be sure to match polarity (+ to +)

Insert FlexTape® into slot on one end until fully seated

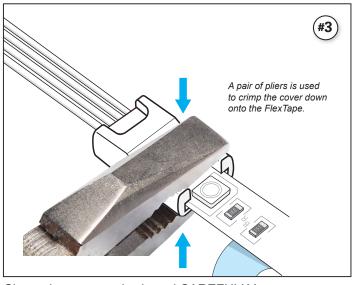

Clamp down cover slowly and CAREFULLY

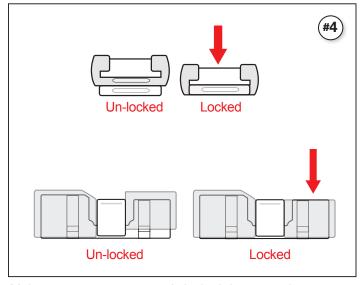

Make sure connector cover is locked down evenly

Save these instructions for future reference. For technical assistance, call 1-800-227-1171



Tresco® Lighting

12400 Earl Jones Way Louisville, KY 40299

Tel: 800-227-1171 Fax: 502-491-2215

ROHS

Email: cservice@trescolighting.com
Web: www.trescolighting.com

I-FLEXCONTUN-1023