

LLR

Lamp Ready Strip

Product Description

The LLR Lamp Ready Strip fixtures are an energy-efficient alternative to traditional fluorescent strip fixtures. They offer the flexibility of installing the desired wattage and color temperature LED T8 Type-B (ballast bypass) double end lamps to meet the needs of the application. They can be used in retail, manufacturing, warehouse, office, education, low-bay, or general lighting applications

- Construction**
- Durable steel construction with powder coat finish
 - Tombstone (flip-up socket) rotates and locks in place
 - G13 Bulb base

- Electrical**
- Input Voltage: 120-277VAC
 - For use with double-ended wiring (Type B) LED T8 tubes
 - Max Lamp Wattage: 22W per lamp
 - Shunted tombstone contacts for double-ended (DEP) wiring

- Mounting and installation**
- Quick and easy single person installation
 - Designed for surface mount
 - Lamps not included

- Listings**
- cULus 1598 Listed for damp locations
 - RoHS Compliant

- Warranty**
- 5-year limited system warranty standard
 - Warranty does not cover product failure due to an overvoltage event (power surge)

Project

Catalog

Type

Date



LLR Tube Ready Strip Type B, Double End



LLR


Lamp Ready Strip

Ordering

Ordering Information						Example: LLR14U2LT8BWH
Series	Version	Length	Voltage	Lamp Number	Lamp Type	Color
LLR	1 (Version 1)	4 (4 feet)	U (120-277V)	2L (2 lamps)	T8B (T8 Type B lamp)	WH (White)

Specifications and dimensions subject to change without notice.

Dimensions

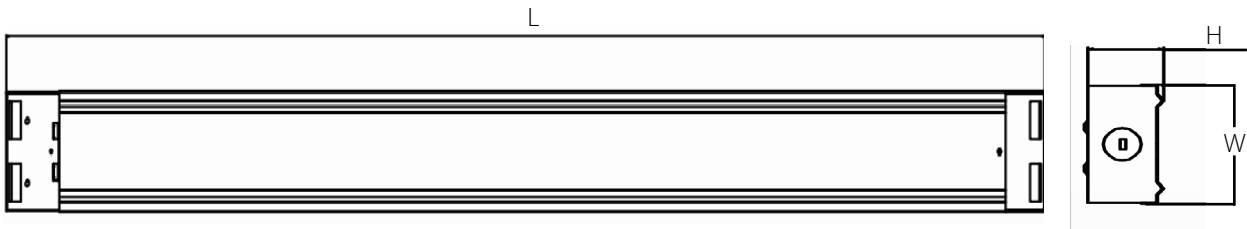

Dimension Data		
Length	Width	Height
48.4 in (1229 mm)	4.4 in (113 mm)	2.1 in (53 mm)