

EXL1-Select

LED Emergency Exit Sign

Project _____

Catalog _____

Type _____

Date _____

Product Description

The EXL1-Select LED Emergency Exit Sign features field-selectable red and green lettering. With included templates for both colors, simply install the preferred slide color and flip the LED switch inside to match. The EXL1 is offered in white and features a universal mounting bracket for simple installation anywhere. An integrated Ni-MH battery with low-voltage disconnect provides 90-minute emergency operation and includes a built-in test button. The EXL1-Select is the ideal low-energy choice for multifamily, commercial, and retail settings.

Construction

- Injection molded thermoplastic ABS housing
- UL-94V-0 flame rating - Flame Retardant
- Field Selectable Red and Green LED light and lettering
- 6" Letter height
- Supplied with faceplates for single or double face configuration

Electrical

- 120/277V dual voltage operation
- LED indicator light & push-button test switch
- 90 Min capacity on emergency mode
- Damp location rated
- Operating temperature rating of 32°F to 104°F (0°C - 40°C)

Installation


- Universal mounting plate with EZ quick connect

Warranty

- 1-year limited system warranty standard

Product Information


Input Voltage (V):	120/277VAC
Input Power(W):	1.0 W
Input Current (A)	0.09 A
Charging Time:	24 hrs
Emergency Battery Run Time:	90 minutes
System Warranty:	1 Year Limited



Integrated toggle switch for red and green LED



LED indicator light & push-button test switch

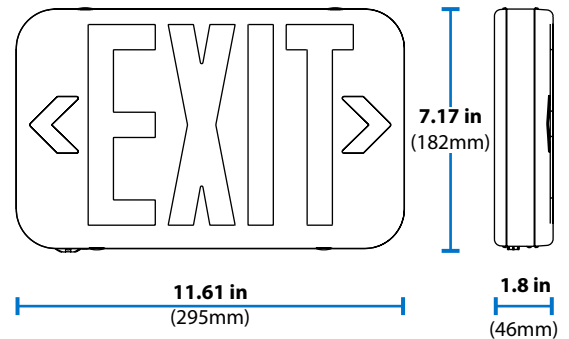

Ordering Information

Example: EXL120UNVWHS2

Series	Version	Voltage	Housing	Lettering Color	No. of Sides
EXL1	20 (2.0)	UNV (120/277V)	WH (white)	S (Red & Green Select)	2

Specifications and dimensions subject to change without notice. Please refer to the website for the most up-to-date information.