

# MVW

## LED Vanity Light

### Product Description

The MVW Series embodies elegance with its sleek design and polished nickel finish accented by metallic touches. This sophisticated vanity light is designed for easy installation on a recessed junction box, offering a seamless addition to any space. ADA compliant, it meets accessibility standards without compromising on style. The opaline glass shade diffuses light beautifully, making it a perfect choice for bathrooms, enclosed patios, and entryways, creating a welcoming and refined ambiance wherever it's placed.

#### Construction

- Die-formed Cold-rolled Steel & Anodized Aluminum
- High transmission acrylic diffuser for uniform light distribution
- Clear glass accent
- Integrated LED
- Hangs vertically or horizontally
- Suitable for bathroom use
- Backplate size: (LxWxD) 4.72" x 4.72" x 1.2"
- Available in two lengths: 22" (559 mm) and 36" (914 mm)
- Hardwired fixture; professional installation recommended

#### Maintenance

- Wipe with a soft cloth
- No abrasive cleaners

#### Electrical

- Input Voltage: 120VAC
- Input Wattage: 20W (22") and 24W (36")

#### Mounting and installation

- Easy installation on a recessed junction box
- Fixture mounts directly to J-Boxes with mounting plate and threaded nipple
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

#### Listings

- cETLus listed
- Damp location
- ADA Compliant

#### Warranty


- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)

Project \_\_\_\_\_

Catalog \_\_\_\_\_

Type \_\_\_\_\_

Date \_\_\_\_\_

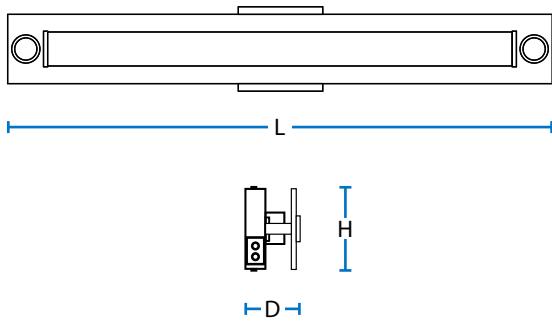

	22"	36"
Fixture Length (L)	22 in (559 mm)	36 in (914 mm)
Fixture Height (H)	3.5 in (89 mm)	4.7 in (119 mm)
Fixture Depth (D)	3.3 in (84 mm)	3.7 in (94 mm)

### Photometric Data

#### MVW 22" - 3000K

Input Voltage (VAC)	120
System Level Power (W)	19
Delivered Lumens (Lm)	1350
System Efficacy (Lm/W)	71
Correlated Color Temp (K)	3000
Color Rendering Index (CRI)	>80

#### MVW 36" - 3000K

Input Voltage (VAC)	120
System Level Power (W)	23
Delivered Lumens (Lm)	1700
System Efficacy (Lm/W)	73.9
Correlated Color Temp (K)	3000
Color Rendering Index (CRI)	>80

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.



### Ordering Information

Example: MVW136120S8NK

Series	Version	Length	Voltage	CCT	CRI	Finish
MVW	1	22	120	S (3000K,3500K,4000K)	8 (>80)	NK (Nickel)
		36				

Specifications and dimensions subject to change without notice. Please refer to the website for the most up-to-date information.