

EXL5 LED Exit Sign

The NICOR EXL5 exit sign provides a code compliant solution for outdoor and wet location requirements. The UL924 Wet Location listed fixture is made from an ABS corrosion-resistant enclosure, making it a durable option. The evenly illuminated exit sign is available with red or green stencils. The maintenance free nickel-cadmium battery provides 90 minutes of back up power. The EXL5 Series offers flexible installation for surface ceiling, wall or end mount options along with field removable chevrons for universal configuration based on your application's directional needs.

Construction

- Injection molded thermoplastic ABS housing, UL-94-V-0 rated material
- Injection molded clear polycarbonate face

Optical System

- Uniform lighting with specially designed plastic diffuser to prevent shadowing

Electrical

- Operating temperature rating of 5°F to 104°F (-15°C to 40°C)
- Maintenance-free nickel-cadmium battery provides 90-minute emergency operation and recharges in 24 hours
- 120/277VAC Dual voltage operation, 60Hz input
- Fully-illuminated 6" letter height with 3/4" stroke
- Includes test switch/power indicator light

Finish

- White textured thermoplastic housing
- Available with either red or green lettering

Installation


- Surface ceiling, wall or end mount installation options
- Universal mounting plate with EZ quick connect
- Universal knockout pattern provided on housing for surface mount install
- Field-installable, removable chevron directional indicators for all configurations
- Supplied with two faces for single or double face installation

Compliance

- UL 924
- Listed for wet locations

Warranty

- 1-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)

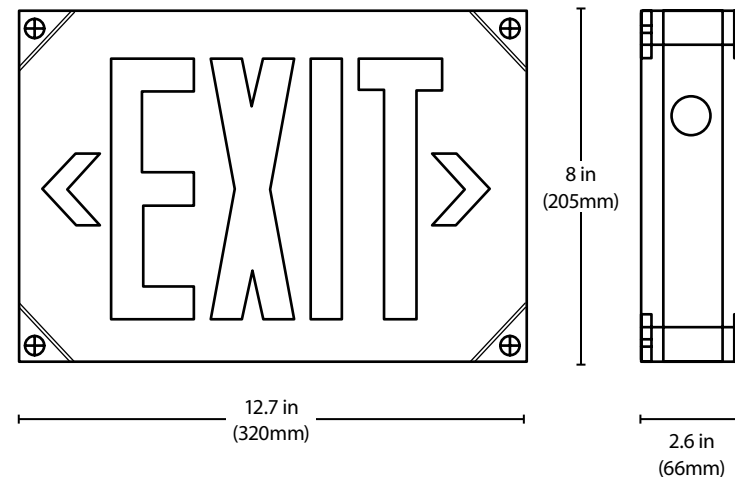

Product Information	
Input Voltage (VAC)	120/277
Power Draw (W)	Red Model: 2.9 W (120 VAC), 3.6 W (277 VAC) Green Model: 2.74 W (120 VAC), 3.5 W (277 VAC)
Emergency Operation	Minimum 90 Minutes



Applications



The EXL series can be installed in many applications such as theaters, gymnasiums, etc.

Installation



Installation of the EXL5 is easy with the included snap-in mounting plate.

The EXL5 Series offers flexible installation for surface ceiling, wall or end mount options along with field adjustable chevrons for universal configuration.



Ordering Information					
Series	Version	Voltage	Housing Color	Letter Color	Number of Faces
EXL5	1 (Version 1)	UNV (120/277VAC)	WH (White)	G (Green)	2 (Single and Double)
				R (Red)	