


NICOR®

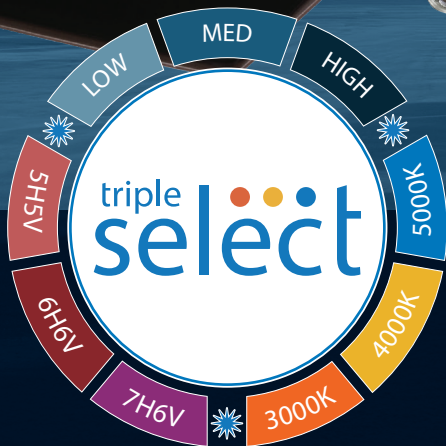

OFL4


LED Flood Light

OFL4

LED Flood Light

Introducing the upgraded OFL4 Flood Light, a pinnacle of high-performance illumination that redefines outdoor lighting. With a traditional, deep form, it offers high efficiency with a versatile offering in one body. It's constructed using the latest in LED technology, providing selectable wattage, color temperature, and beam throw options via an integrated switch. The OFL4 features a die-cast aluminum housing with a UV-stabilized powder-coat finish, and stainless-steel hardware for protection against the elements, ensuring long-lasting durability. The impact-resistant polycarbonate lens provides further protection while maintaining uniform light dispersion, enhanced by three options of beam distribution pattern and a high CRI value for vivid clarity. The OFL4 includes a pre-installed knuckle or slipfitter arm (150W and 320W fixtures will have the slipfitter) and a trunnion mount to suit your installation preference. Effortlessly improve landscapes, signage, facades, pathways, and open spaces with the OFL4, where superior lighting and versatility converge.


Dimensions

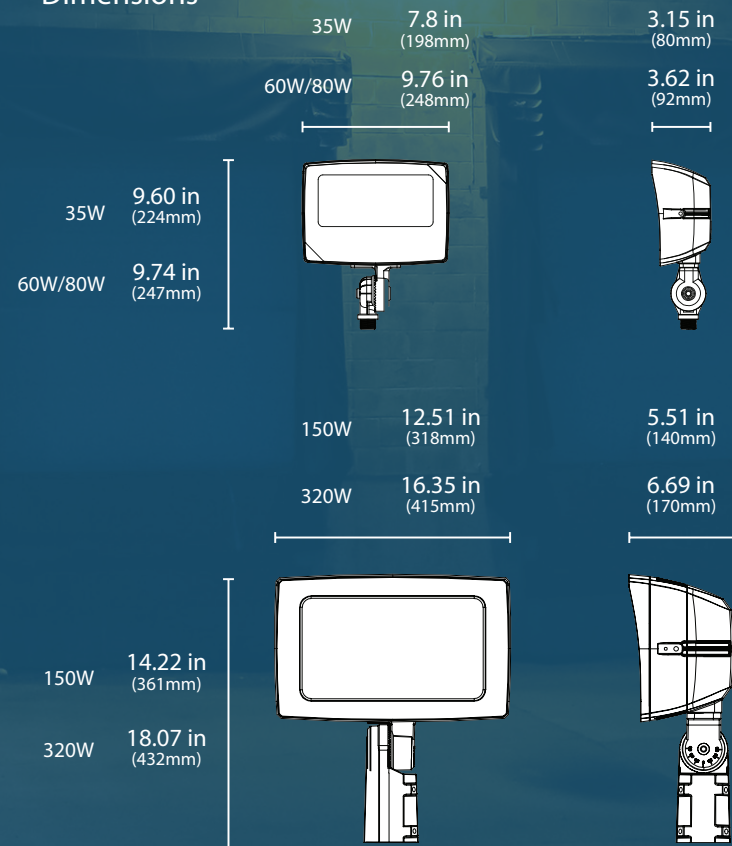

FEATURES

Versatile Precision Lighting

Adjustable wattage, color temperature, and beam throw options via integral switches located on the back.



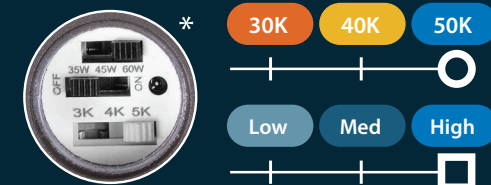


Select the Perfect Light

The OFL LED flood light offers selectable wattage and color temperatures, ranging from warm white to daylight, for customized illumination.

Angle Switch Plug

Provides 3 different beam throws for different applications.

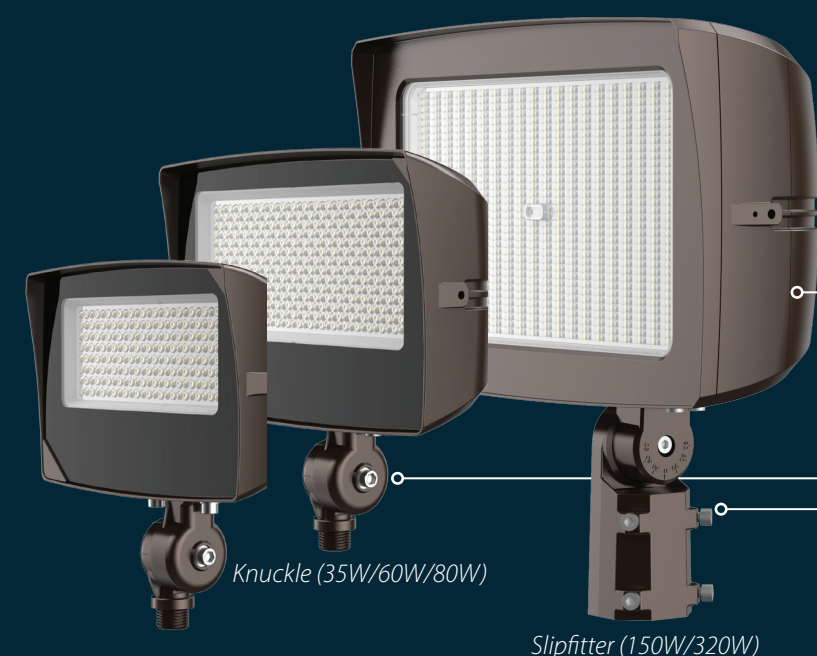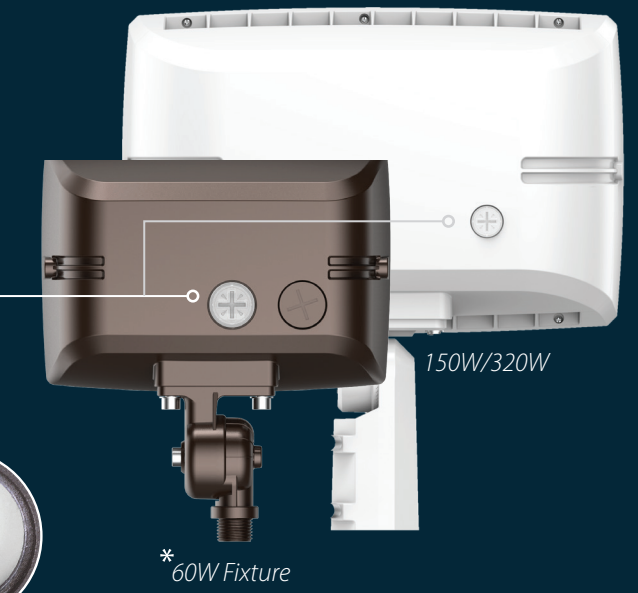

- CRI** 80
- Lumens** 2119-48136
- Lifetime** >50,000 hrs
- Beam Angle** 5H5V / 6H6V / 7H6V

Rugged & Weather-Resistant


Die-cast aluminum housing, UV-stabilized finish, and IP65 rating ensure durability in harsh conditions.

Versatile & Easy Installation

Multiple mounting options, including a pre-installed knuckle or slipfitter arm (based on wattage), trunnion mount, and U-bracket, provide flexibility for various project needs.

Ordering Information						Example: OFL4035SUS8BZ
Series	Version	Wattage	Voltage	CCTs	CRI	Finish
OFL	4	035S	U (120-277V)	S (30K/40K/50K)	8 (80)	BZ (Bronze)
		060S				WH (White)
		080S				
		150S				
		320S				

See spec-sheet for additional ordering information.

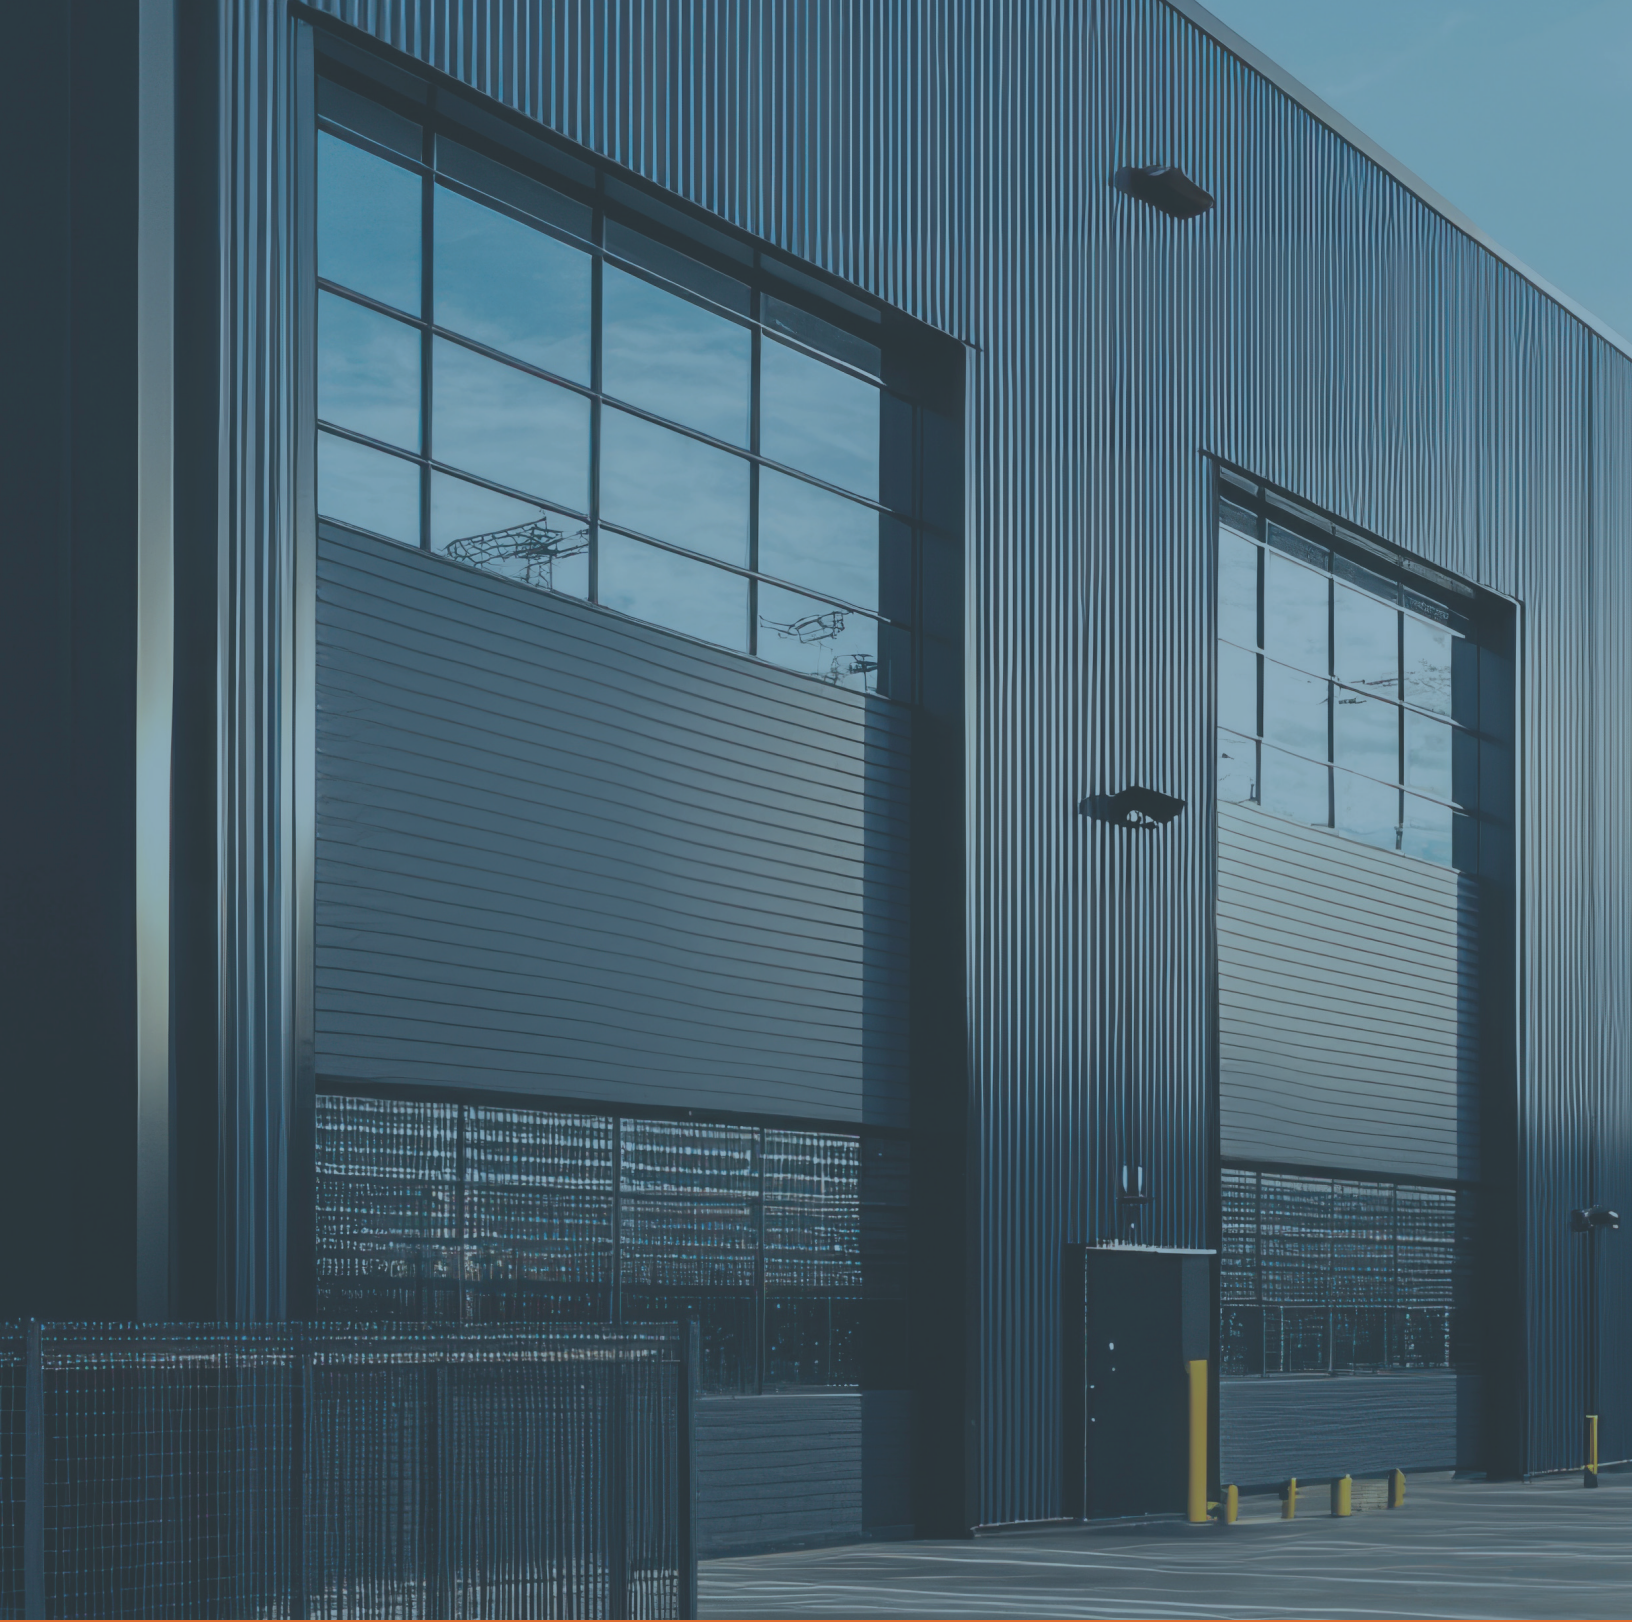

Warehouse Locations

Albuquerque, NM
Buford, GA
Roseville, CA

T. 800-821-6283 F. 800-892-8393

