EXL1-Select

LED Emergency Exit Sign

Project

Catalog

Type

Date

Product Description

The EXL1-Select LED Emergency Exit Sign combines energy-efficient performance with flexible installation and reliable emergency operation. Featuring field-selectable red or green lettering, interchangeable faceplates, and a universal mounting bracket, the EXL1-Select adapts easily to a variety of commercial, retail, and multifamily applications. Available with automatic self-diagnostic testing, the fixture simplifies maintenance while providing 90-minutes of emergency illumination through its rechargeable Ni-MH battery.

Construction
- Injection molded thermoplastic ABS housing
- White and Black finishes available
- UL-94V-0 flame rating - Flame Retardant
- Field Selectable Red and Green LED light and lettering
- 6" Letter height
- Supplied with faceplates for single or double face configuration


Electrical
- 120-277V dual voltage operation
- LED indicator light & push-button test switch
- 90 Min capacity on emergency mode
- Damp location rated
- Operating temperature rating of 32˚F to 104˚F (0˚C - 40˚C)
- Self Diagnostic feature automatically tests and reports on fixture status

Installation
- Universal mounting plate with EZ quick connect

Listings
- cULus924 Listed (Emergency Lighting)
- NFPA 101 (Life Safety Code) compliant
- NFPA 70 (National Electrical Code) compliant

Warranty
- 1-year limited system warranty standard





Integrated toggle switch for red and green LED




LED indicator light & push-button test switch



Product Information

Input Voltage (V):	120-277VAC
Input Power(W):	1.2 W
Input Current (A)	0.022 A
Charging Time:	24 hrs
Emergency Battery Run Time:	90 minutes
System Warranty:	3 Year Limited

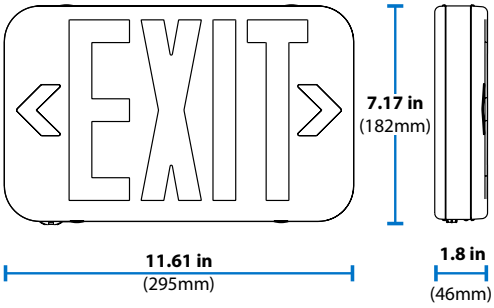

color select CERTIFIED DAMP LOCATION RATED 3 YEAR WARRANTY

Ordering Information

Example: EXL120UNVWHS2

Series	Version	Voltage	Housing	Lettering Color	No. of Sides	Self Diagnostic
EXL1	**20** (2.0)	**UNV** (120-277V)	☐ **WH** (White)	**S** (Red & Green Select)	**2**	☐ ___ (none)
			☐ **BK** (Black)			☐ **SD** (self diagnostic)

Specifications and dimensions subject to change without notice. Please refer to the website for the most up-to-date information.

NICOR®