

MVM
LED Vanity Light

Product Description

The MVM vanity light is crafted with a durable steel body and a crisp white acrylic shade and is available in two lengths: 24 inches and 30 inches. Emitting a warm 3000K light, the high CRI of 90 ensures true-to-life colors. This vanity light offers seamless Triac dimming compatibility within a versatile voltage range of 120V-277V. Designed for damp locations, it combines style and performance effortlessly to enhance your space.

Construction

- Steel body
- High transmission acrylic diffuser for uniform light distribution
- Integrated LED
- Hangs vertically or horizontally
- Suitable for bathroom use
- Fixture weight: 24"- 1.8 lbs (0.8 kg); 30"- 2.6 lbs (1.2 kg)
- Backplate size: (LxWxD) 4.72"x 4.72"x 1.2"
- Available in two lengths: 24" (610mm) ; and 30" (762mm)
- Hardwired fixture; professional installation recommended

Maintenance

- Wipe with a soft cloth
- No abrasive cleaners

Electrical

- Input Voltage: 120-277VAC
- Dimmable with compatible leading edge (TRIAC) and ELV
- Input Wattage: 16W (24") and 20W (30")

Mounting and installation

- Easy installation on a recessed junction box
- Fixture mounts directly to J-Boxes with mounting plate and threaded nipple
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Listings

- cETLus listed
- Damp location
- ADA Compliant

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)

Photometric Data

MVM 24" - 3000K

Input Voltage (VAC)	120-277
System Level Power (W)	16
Delivered Lumens (Lm)	1250
System Efficacy (Lm/W)	81.5
Correlated Color Temp (K)	3000
Color Rendering Index (CRI)	90

MVM 30" - 3000K

Input Voltage (VAC)	120-277
System Level Power (W)	20
Delivered Lumens (Lm)	1550
System Efficacy (Lm/W)	77.5
Correlated Color Temp (K)	3000
Color Rendering Index (CRI)	90

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.





Ordering Information

Series	Version	Length	Voltage	CCT	CRI	Finish
MVM	1	24	UNV (120-277)	30 (3000K)	9 (90)	BK (Black)
		30				NK (Nickel) <sup>1</sup>

Specifications and dimensions subject to change without notice. Please refer to the website for the most up-to-date information.

1. Contact factory for MOQ and lead times on these type of configurations.

Project
Catalog
Type
Date

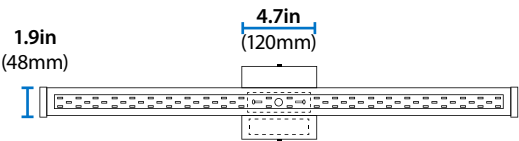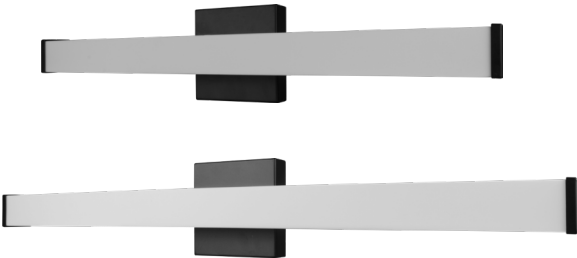

Example: MVM130UNV309BK

