versatile™ 4C Mailbox, Max Height Suite

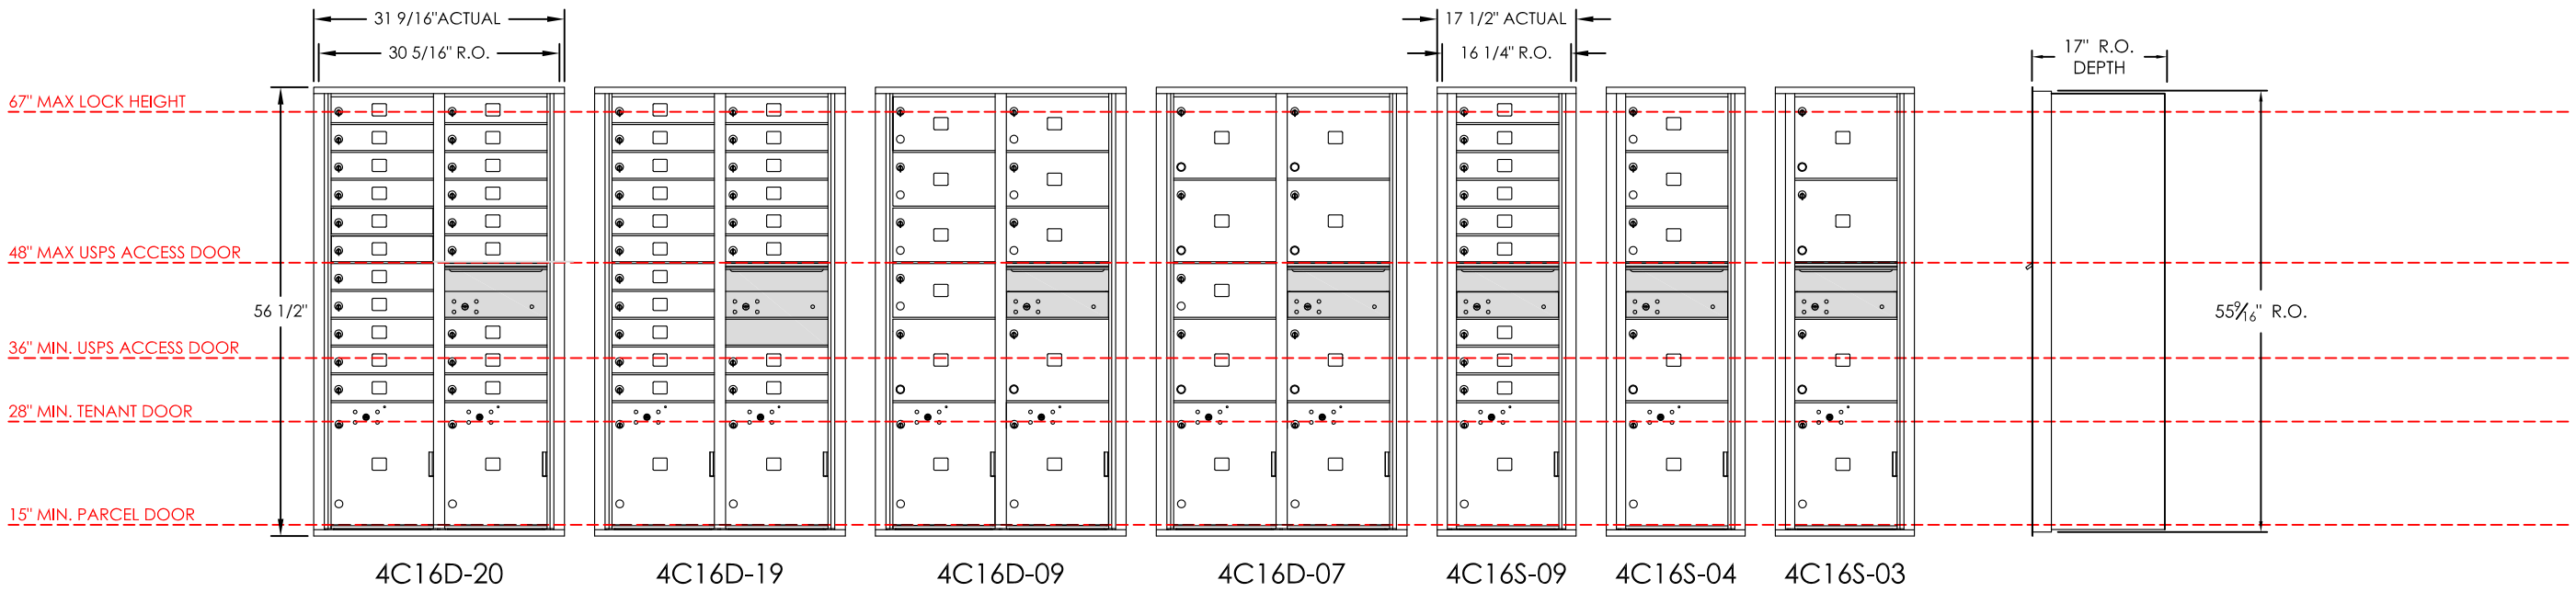

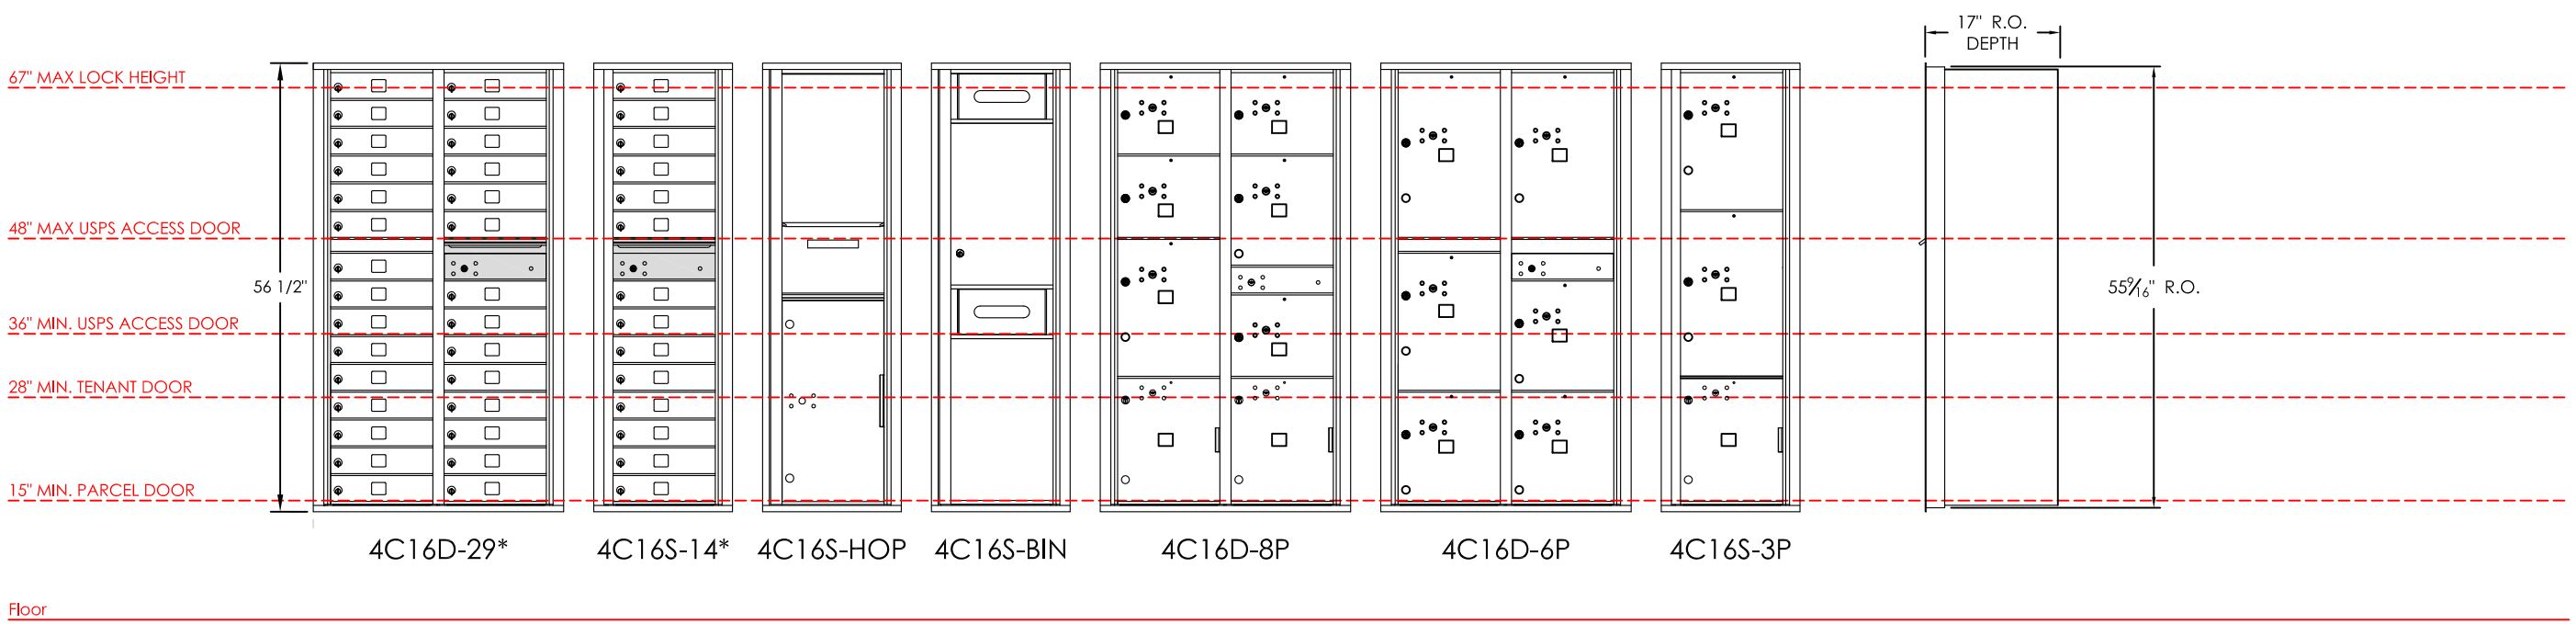

NOTES:

1. Below are the USPS STD-4C installation guidelines:
   a. At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
   b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
   c. No patron (tenant) lock shall be positioned more than 67" AFF.
   d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
   e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
2. Modules noted with * do not meet USPS STD-4C guidelines above.

PRODUCT SERIES: versatile™ 4C Mailbox Max Height Suite

FLORENCE manufacturing company
5935 Corporate Drive • Manhattan, KS 66503
www.florencemailboxes.com • (800) 275-1747
A GIBRALTAR INDUSTRIES COMPANY

MODEL 4CMAX		REV A	
SCALE NONE		LAST REV DATE 5/15/2014	
DRAWING NUMBER 4CMAXCS	DRAWN BY AFD	SHEET 1 OF 1	