



CUSTOMER NAME _____

Project Name _____

Date _____ Type _____

Catalog Number _____

Allusion Series

Linear Wall Mount

Allusion Wall Mount is an architectural linear wall-mounted platform offering long life, high efficiency, and enhanced color rendering provided by the included TriGain® technology. A variety of lens, housing color and accessory options provide an ideal package for any specifier or architect's tool box. Allusion's low-profile mounting brackets are concealed behind the luminaire once installed for a clean, minimal aesthetic.

CONSTRUCTION

Housing:	Aluminum extruded housing. Diecast endcaps
Lens:	Impact resistant Medium Flush, Glow, and Wall Wash lenses. Powdercoated metal Louvers
Paint:	Powder painted, standard Black/White/Silver. Custom colors available
Weight:	8-22 Lbs
Optical Assembly:	Precision formed high efficiency reflector and optical diffuser

OPTICAL SYSTEM

Delivered Down Lumens:	400-1100 lm/LFT 100 lumen Increments per linear foot (LFT)
Down Distribution Pattern:	Medium Flush, Louver (no lens), Glow, Wall Wash
Delivered Up Lumens:	400-1100 lm/LFT 100 lumen Increments per linear foot (LFT)
Up Distribution Pattern:	Batwing
System Efficacy (LPW):	>90 LPW
CCT:	3000K, 3500K, 4000K, 5000K
CRI (Min):	TriGain® 90, 90
Color Consistency:	4 Step MacAdam Ellipse

LUMEN AMBIENT TEMPERATURE

Product ID	Operating Temperature
LALS	-10° TO 30° C

ELECTRICAL

Input Voltage:	120-277V, 347V
Input Frequency:	50/60Hz
Standard Dimming Control:	0-10V 1%, Daintree Wireless Controls, Lutron EcoSystem
Power Factor (PF)*:	> 90%
Total Harmonic Distortion (THD)*:	< 20%
EMBB:	Integral Emergency Battery (optional)
Maximum Run Length:	100 ft per 1 powerdrop

* System PF and THD specified at rated watts

CONTROLS

Dimming:	Standard 0-10V, 1% Daintree® Wireless Lutron EcoSystem, Hi-lume 1% with Soft-on, Fade-to-Black
-----------------	--

MOUNTING

- Wall Mount
- Supplied, low-profile mounting brackets

ADDITIONAL NOTES

- No visible LEDs for MM, GL, and WW down light lens options
- Independent (IN), single-fixture option is available and comes with factory-installed endcaps and knockout plates. All hardware is included within fixture box.
- Each row of connected fixtures requires one Starter Kit
- Suitable for dry and damp locations



CUSTOMER NAME

Project Name _____

Date _____ Type _____

Catalog Number _____

Catalog Logic

1. FIXTURE

LALS

A

WM

FAMILY	FIXTURE WIDTH	FIXTURE LENGTH	GEN.	VOLTAGE	UP LIGHT DISTRIBUTION	UP LIGHT LUMENS/ FOOT	DOWN LIGHT DISTRIBUTION	DOWN LIGHT LUMENS/ FOOT	CRI/CCT	CONTROLS	MOUNTING	FINISH ⁵	OPTIONS
LALS	2 = 2in 4 = 4in	2 ^{1,10} = 2ft 4 = 4ft 5 = 5ft 6 = 6ft 8 = 8ft	A	0 = 120 - 277V D = 347V	AS ² = Asymmetric NA = No Uplight	10 = 1,000 09 = 900 08 = 800 07 = 700 06 = 600 05 = 500 04 = 400 00 = no uplight	MM = Med Flush GL ⁸ = Glow LW ³ = Louver WW ⁸ = Wall Wash	10 = 1,000 09 = 900 08 = 800 07 = 700 06 = 600 05 = 500 04 = 400	T35 = TriGain® 3500K T40 = TriGain® 4000K	VQ = 0-10v TQ ⁴ = Wireless Enabled, Daintree Compatible TS ⁴ = Wireless Enabled w/ Daintree WFA100	WM ⁹ = Wall Mount Note: not compatible with LALS L9 option	WHITE = White BLCK = Black SLVR = Silver	BLANK = No Options EL ^{5,6} = EMBB IN ⁷ = Independent

2. ORDERING NOTES

1. Starter Kit must match fixture voltage, ordered separately. Refer to Starter Kits.
2. Asymmetric (AS) is not available with 00LM/FT option.
3. Louvers (LW) option is field installed and contains no lens. LW option not available for L9 fixture option.
4. Daintree and Lutron controls (TQ or TS) are only available with the 120-277V (0) option. No 347V option.
5. Contact manufacturer for custom colors. Additional lead time and MOQ applicable.
6. Integral Emergency Battery (EL) option only available with (0) Voltage and (V1) Controls option, not available with 2ft fixture length.
7. Independent fixture (IN) has factory-installed endcaps and KO plates. Supplied power cord and suspension cables must be filed installed.
8. If ordering multiple "Options," fill in Catalog Logic in alphabetical order (i.e. XX_XXXX_DF_IN).
9. Not Compatible with LALS L9 Option.
10. 2ft length must have a minimum 800lm/ft for up light and down light, Not available with EMBB option, Not available with 347V.





CUSTOMER NAME

Project Name _____


Date _____ Type _____

Catalog Number _____

LALS WALL MOUNT

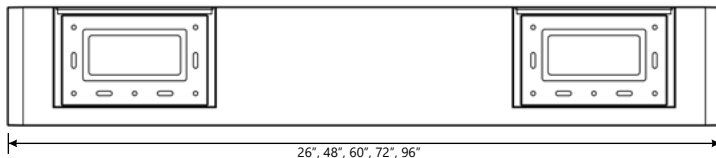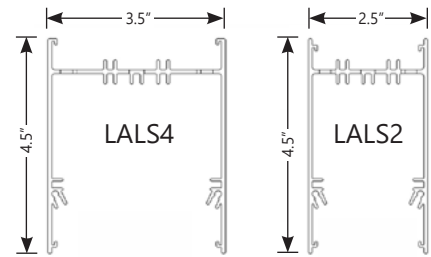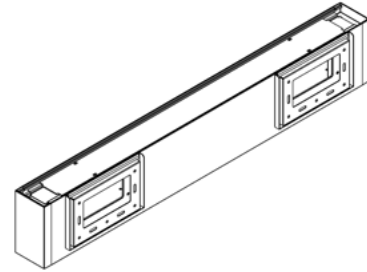TOP VIEW

BOTTOM VIEW

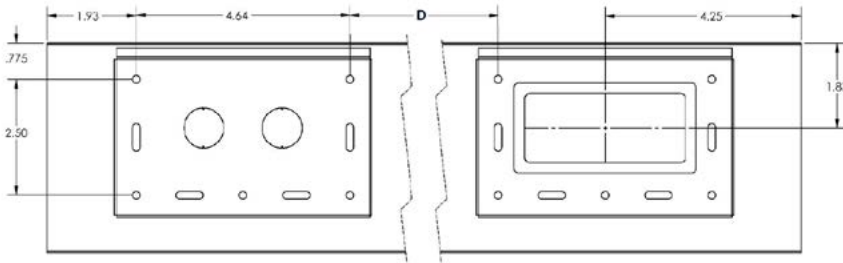SIDE VIEW

FRONT/PROFILE
MOUNTING

- Fixture is provided with non-powered suspension kit
- Starter kit is required (includes power connection, pair of end caps, and additional suspension kit)
- Independent option (IN) includes all hardware and factory-installed endcaps

LALS WALL MOUNT MOUNTING


Fixture Description	Fixture Length	D
LALS 2'	26"	12.86"
LALS 4'	48"	34.86"
LALS 5'	60"	46.86"
LALS 6'	72"	58.86"
LALS 8'	96"	82.86"

CUSTOMER NAME


Project Name _____

Date _____ Type _____

Catalog Number _____

Down Lens Options


Louvers Lens (LW option)

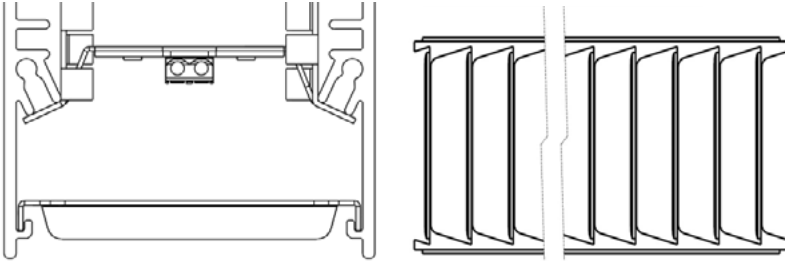

Louver Length = 12 inches
One used per every foot in LALS fixtures

- Provided in separate packs with fixtures, to be installed on site (see Install Guide for proper orientation).
- Louvers are matte white painted finish.
- Louvered fixtures do not have a lens.

Glow Lens (GL option)

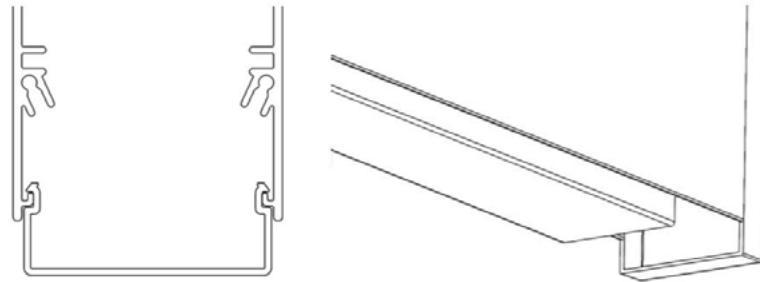


Length of Glow Lens is equal to fixture lengths available

Note: All Glow Lens Starter Kits are provided with Glow Lens end caps. Glow Lens end caps are 1/2" larger than flush lens end caps. Refer to p. 5.




Glow endcaps are larger than standard endcaps

Wall Wash (WW option)

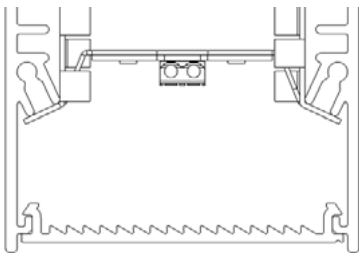


Length of Wall Wash Lens is equal to fixture lengths available

Note: All Wall Wash Lens Starter Kits are provided with flush lens end caps. Refer to p. 5.

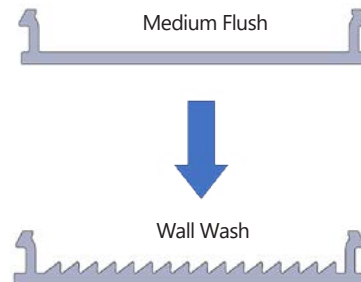

Kits and Accessories

STARTER KIT



Fixture	Product Code	Color	SAP Part Number
LALS 2	Standard MM and WM Lenses		
	93139834	Black	LALS2-WALL-MOUNT-WHTE-STARTER-KIT
	93139835	Silver	LALS2-WALL-MOUNT-SLVR-STARTER-KIT
	93139876	Black	LALS2-WALL-MOUNT-BLCK-STARTER-KIT
	Glow Lens (1.2" Only)		
	93139877	White	LALS4-WALL-MOUNT-WHTE-STARTER-KIT
	93139878	Silver	LALS4-WALL-MOUNT-SLVR-STARTER-KIT
93139879	Black	LALS4-WALL-MOUNT-BLCK-STARTER-KIT	

Fixture	Product Code	Color	SAP Part Number
LALS 4	Standard MM and WM Lenses		
	93139880	Black	LALS2-WALL-MOUNT-WHTE-STARTER-KIT
	93139881	Silver	LALS2-WALL-MOUNT-SLVR-STARTER-KIT
	93139882	Black	LALS2-WALL-MOUNT-BLCK-STARTER-KIT
	Glow Lens (1.2" Only)		
	93139883	White	LALS4-WALL-MOUNT-WHTE-STARTER-KIT
	93139884	Silver	LALS4-WALL-MOUNT-SLVR-STARTER-KIT
93139885	Black	LALS4-WALL-MOUNT-BLCK-STARTER-KIT	

1 STARTER KIT REQUIRED PER FIXTURE INSTALLATION

NOTE:
 Refer to Installation Guide for visualization
 Glow Lens starter kit contains end caps which are 1/2" longer

Customer Name	_____	Date	_____
CUSTOMER NAME			
Project Name	_____		
Catalog Number	_____	Type	_____
Date	_____	Type	_____
Catalog Number	_____		

Performance

LALS2 Up Light*

Product Width & Length	CAT Logic	Lm/ft	Nominal Lumen	4000K TriGain* Wattage	3500K TriGain* Wattage
22	08	800	1600	13.9	14.3
22	09	900	1800	15.8	16.2
22	10	1000	2000	17.6	18.2
24	04	400	1600	13.4	13.8
24	05	500	2000	14.8	15.3
24	06	600	2400	18.3	18.8
24	07	700	2800	21.6	22.4
24	08	800	3200	25.1	25.9
24	09	900	3600	28.4	29.4
24	10	1000	4000	31.9	32.9
25	04	400	2000	14.8	15.3
25	05	500	2500	19.1	19.6
25	06	600	3000	23.4	24.1
25	07	700	3500	27.6	28.4
25	08	800	4000	31.9	32.9
25	09	900	4500	36.2	37.2
25	10	1000	5000	40.5	41.7
26	04	400	2400	17.2	17.7
26	05	500	3000	22.4	22.9
26	06	600	3600	27.4	28.4
26	07	700	4200	32.6	33.6
26	08	800	4800	37.7	39.0
26	09	900	5400	43.1	44.4
26	10	1000	6000	48.3	49.9
28	04	400	3200	23.4	24.1
28	05	500	4000	29.9	30.9
28	06	600	4800	36.3	37.6
28	07	700	5600	42.8	44.3
28	08	800	6400	50.2	51.7
28	09	900	7200	57.7	59.5
28	10	1000	8000	65.2	67.0

LALS4 Up Light*

Product Width & Length	CAT Logic	Lm/ft	Nominal Lumen	4000K TriGain* Wattage	3500K TriGain* Wattage
42	08	800	1600	13.9	14.3
42	09	900	1800	15.8	16.2
42	10	1000	2000	17.6	18.2
44	04	400	1600	13.4	13.8
44	05	500	2000	14.8	15.3
44	06	600	2400	18.3	18.8
44	07	700	2800	21.6	22.4
44	08	800	3200	25.1	25.9
44	09	900	3600	28.4	29.4
44	10	1000	4000	31.9	32.9
45	04	400	2000	14.8	15.3
45	05	500	2500	19.1	19.6
45	06	600	3000	23.4	24.1
45	07	700	3500	27.6	28.4
45	08	800	4000	31.9	32.9
45	09	900	4500	36.2	37.2
45	10	1000	5000	40.5	41.7
46	04	400	2400	17.2	17.7
46	05	500	3000	22.4	22.9
46	06	600	3600	27.4	28.4
46	07	700	4200	32.6	33.6
46	08	800	4800	37.7	39.0
46	09	900	5400	43.1	44.4
46	10	1000	6000	48.3	49.9
48	04	400	3200	23.4	24.1
48	05	500	4000	29.9	30.9
48	06	600	4800	36.3	37.6
48	07	700	5600	42.8	44.3
48	08	800	6400	50.2	51.7
48	09	900	7200	57.7	59.5
48	10	1000	8000	65.2	67.0

*NOTE: - Total fixture performance is the summation of both the Down and Up wattages and nominal lumens.


Photometric Data

UP ONLY - ASYMMETRIC

LALS-4-4-A-0-AS-07-XX-XX-XXX-XX-XX-WHITE-XX

ZONAL LUMEN SUMMARY	
Zone	Lumens
0-10°	0
10-20°	0
20-30°	0
30-40°	0
40-50°	0
50-60°	0
60-70°	0
70-80°	0
80-90°	0
90-100°	42
100-110°	208
110-120°	368
120-130°	473
130-140°	509
140-150°	474
150-160°	383
160-170°	252
170-180°	89

ZONAL LUMEN SUMMARY		
Zone	Lumens	% of Fixture
0-30°	0	0
0-60°	0	0
0-90°	0	0
90-120°	617	22
90-150°	2072	74
90-180°	2800	100.0
0-180°	2800	100.0

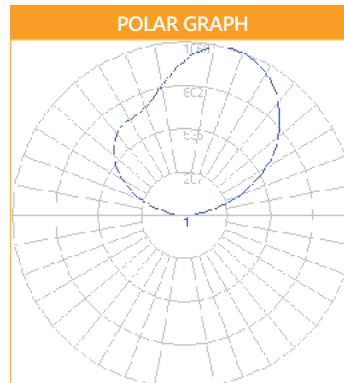

For more information please see IES files at www.LED.com

Performance

LALS2 Down Light*

Product Width & Length	CAT Logic	Lm/ft	Nominal Lumen	4000K TriGain* Wattage	3500K TriGain* Wattage
22	08	800	1600	16.7	17.2
22	09	900	1800	18.9	19.7
22	10	1000	2000	21.2	22.0
24	04	400	1600	15.1	15.6
24	05	500	2000	19.2	19.7
24	06	600	2400	23.1	23.8
24	07	700	2800	27.1	27.9
24	08	800	3200	31.2	32.3
24	09	900	3600	35.3	36.6
24	10	1000	4000	40.5	41.8
25	04	400	2000	18.8	19.3
25	05	500	2500	23.4	24.2
25	06	600	3000	28.3	29.3
25	07	700	3500	33.5	34.5
25	08	800	4000	38.7	39.9
25	09	900	4500	44.0	45.3
25	10	1000	5000	47.2	48.7
26	04	400	2400	22.7	23.5
26	05	500	3000	28.7	29.8
26	06	600	3600	35.0	36.1
26	07	700	4200	41.4	42.6
26	08	800	4800	47.7	49.2
26	09	900	5400	54.5	56.0
26	10	1000	6000	61.0	63.0
28	04	400	3200	29.3	30.2
28	05	500	4000	36.7	37.7
28	06	600	4800	44.4	46.0
28	07	700	5600	52.8	54.7
28	08	800	6400	60.9	63.0
28	09	900	7200	69.8	72.1
28	10	1000	8000	75.0	77.6

LALS4 Down Light*

Product Width & Length	CAT Logic	Lm/ft	Nominal Lumen	4000K TriGain* Wattage	3500K TriGain* Wattage
42	08	800	1600	15.2	15.7
42	09	900	1800	17.4	17.9
42	10	1000	2000	19.4	19.9
44	04	400	1600	14.9	14.9
44	05	500	2000	17.4	17.9
44	06	600	2400	21.0	21.8
44	07	700	2800	24.6	25.4
44	08	800	3200	28.4	29.4
44	09	900	3600	32.3	33.3
44	10	1000	4000	36.9	37.9
45	04	400	2000	17.1	17.6
45	05	500	2500	21.5	22.0
45	06	600	3000	25.9	26.6
45	07	700	3500	30.6	31.5
45	08	800	4000	35.2	36.2
45	09	900	4500	40.1	41.3
45	10	1000	5000	45.0	46.5
46	04	400	2400	20.7	21.3
46	05	500	3000	26.2	27.0
46	06	600	3600	31.8	32.8
46	07	700	4200	37.5	38.7
46	08	800	4800	43.4	44.8
46	09	900	5400	49.4	51.0
46	10	1000	6000	55.6	57.3
48	04	400	3200	26.7	27.4
48	05	500	4000	33.3	34.3
48	06	600	4800	40.4	41.6
48	07	700	5600	47.8	49.4
48	08	800	6400	55.3	57.1
48	09	900	7200	63.3	65.1
48	10	1000	8000	71.3	73.7

- *NOTE: - Total fixture performance is the summation of both the Down and Up wattages and nominal lumens.
 - Glow (GL) Option is 5% less lumens than values shown above.
 - Wall Wash (WW) Option is 7% more lumens than values shown above.


Photometric Data

DOWN ONLY - MEDIUM FLUSH LENS

LALS-4-4-A-0-NA-00-MM-07-XXX-XX-XX-WHTE-XX

ZONAL LUMEN SUMMARY	
Zone	Lumens
0-10°	100
10-20°	283
20-30°	420
30-40°	493
40-50°	497
50-60°	438
60-70°	328
70-80°	186
80-90°	49
90-100°	0
100-110°	0
110-120°	0
120-130°	0
130-140°	0
140-150°	0
150-160°	0
160-170°	0
170-180°	0

ZONAL LUMEN SUMMARY		
Zone	Lumens	% of Fixture
0-30°	804	29
0-60°	2233	80
0-90°	2800	100
90-120°	0	0
90-130°	0	0
90-150°	0	0
90-180°	0	0
0-180°	2800	100.0

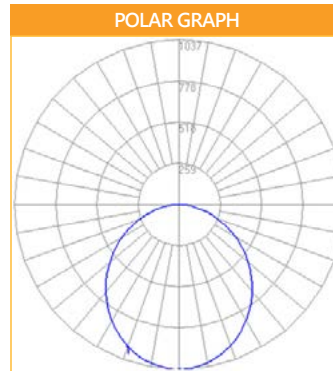

For more information please see IES files at www.LED.com

CUSTOMER NAME

Project Name _____

Date _____ Type _____

Catalog Number _____

Photometric Data

DOWN ONLY - GLOW LENS

LALX-4-4-A-0-NA-00-GL-07-XXX-XX-WHITE-XX


ZONAL LUMEN SUMMARY

Zone	Lumens
0-10°	78
10-20°	224
20-30°	338
30-40°	408
40-50°	426
50-60°	393
60-70°	318
70-80°	213
80-90°	101
90-100°	48

ZONAL LUMEN SUMMARY

Zone	Lumens	% of Fixture
0-30°	640	24
0-60°	1867	70
0-90°	2499	94
90-120°	119	5
90-130°	140	5
90-150°	159	6
90-180°	161	6
0-180°	2660	100

POLAR GRAPH



For more information please see IES files at www.LED.com

DOWN ONLY - WHITE LOUVERS (NO LENS)

LALS-4-4-A-0-NA-00-LW-07-XXX-XX-WHITE-XX


ZONAL LUMEN SUMMARY

Zone	Lumens
0-10°	130
10-20°	369
20-30°	546
30-40°	562
40-50°	507
50-60°	345
60-70°	206
70-80°	108
80-90°	27

ZONAL LUMEN SUMMARY

Zone	Lumens	% of Fixture
0-30°	1045	37
0-60°	2459	89
0-90°	2800	100
90-120°	0	0
90-130°	0	0
90-150°	0	0
90-180°	0	0
0-180°	2800	100

POLAR GRAPH



For more information please see IES files at www.LED.com

DOWN ONLY - WALL WASH

LALS-4-4-A-0-NA-00-WW-07-XXX-XX-WHITE-XX


ZONAL LUMEN SUMMARY

Zone	Lumens
0-10°	120
10-20°	330
20-30°	485
30-40°	555
40-50°	532
50-60°	448
60-70°	320
70-80°	166
80-90°	40
90-100°	0

ZONAL LUMEN SUMMARY

Zone	Lumens	% of Fixture
0-30°	934	31
0-60°	2467	82
0-90°	2996	100
90-120°	0	0
90-130°	0	0
90-150°	0	0
90-180°	0	0
0-180°	2996	100

POLAR GRAPH



For more information please see IES files at www.LED.com

CUSTOMER NAME

Project Name _____

Date _____ Type _____

Catalog Number _____

Controls & Sensors

DAINTREE CONTROLS

- **Daintree® Wireless Controls:**

There is no one size fits all for wireless controls. Some networks want simple solutions that reduce energy consumption and meet code compliance while others are more ambitious, looking to capitalize on the LED and controls savings to fund a scalable, enterprise-grade, internet of things solution. The advantage of the Daintree Wireless platform is it's ability to integrate into indoor, outdoor and high bay environments. The Daintree Wireless Controls provide the infrastructure to future proof your buildings, easily upgrade to Networked solutions and provide the ability to integrate into IoT solutions that are right for your business.

- Daintree One: Standalone Wireless Controls
- Daintree EZ Connect: Room-Based Wireless Lighting Controls
- Daintree Networked: Networked Lighting Controls for Smart Building & IoT Enablement

Daintree Wireless Controls are already integrated in your favorite Current LED fixtures. Integrating the controls into the fixture cuts labor costs considerably since the sensors are already embedded in the lighting fixtures. There's no need to get above the ceiling plenum and install additional devices. Visit our website <https://products.gecurrent.com> for a complete list of LED Fixtures that have Daintree integrated controls.

- **The LALS Series Architectural Luminaire will offer Daintree Networked integral controls (Controls option TQ). Integral sensors and IOT devices are not offered at this time.**

LUTRON CONTROLS

- **Lutron EcoSystem:** EcoSystem technology is a control method for LEDs that provides addressing of individual fixtures and status feedback from the LED drivers. This makes it easy to digitally assign occupancy sensors, daylight sensors, time clocks, manual controls and other controls to one or many fixtures without complicated wiring. This opens up an entire suite of energy-saving, system-monitoring and system-control schemes where the design, setup and rezoning are all done within software, making the electrical and control design simple.