


# XL T8 Type B Double-Ended LED Tube

Extra-Long Life. Extra Lumens Per Watt.

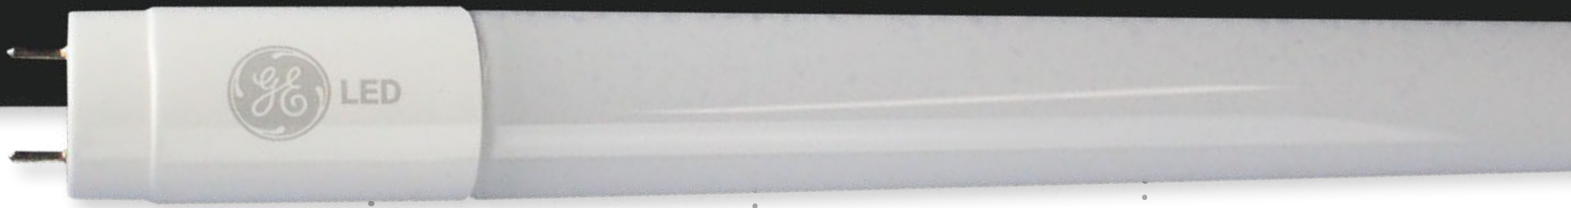

## XL EFFICIENCY

**35%**

more energy-efficient\*



## XL LIFE

**40%**

longer life\*

**70,000-HR**

rated life

A premium extension to our Type B portfolio and engineered to the highest standards, the new XL T8 LED Tubes from GE Current, a Daintree company, provide long-lasting performance, a market-leading lumen-per-watt (LPW), unmatched reliability and superior energy savings.

Perfect for when a longer-lasting, more efficient light output is needed or high performance and limited maintenance are demanded.

\*Versus standard Type B double-ended LED tubes

# Details That Make the Extra Difference

## XL Benefits: HOW THEY DELIVER MORE

### MORE LIFE

40% longer life than standard Type B double-ended LED tubes

### MORE SAVINGS

35% more versus standard Type B double-ended LED tubes

### MORE LIGHT

Better quality of light with instant-on capabilities  
Fully illuminates fixture; delivers a 270° light distribution

### MORE CONVENIENCE

Fast and easy LED upgrade  
Low-energy LFL replacement  
Easy disposal; nonhazardous waste  
No socket replacement necessary; use with shunted or nonshunted sockets  
7-year warranty

## XL Features: HOW THEY'RE DESIGNED

### DESIGNED TO LAST

70,000-hour rated life

### DESIGNED TO FIT

Glass tube construction | 4' T8 tubes

### DESIGNED TO PROTECT

Internal safety switch provides protection for the installer  
Internal misapplication circuit provides protection if lamp is placed into ballasted fixture

In-line fuse kit protects the installer if LFL is re-installed in the future (optional, sold separately)

### DESIGNED TO ILLUMINATE

Available in three lumen outputs: 9.5W/1650, 13W/2050 and 16W/2550

Available in 3000K, 3500K, 4000K and 5000K

## TYPE B DOUBLE-ENDED LED TUBES - XL

| Type                                 | Base Type | Watts | Order Code | Description        | Volts   | Case QTY | MOL (In) | Lumens Initial | Initial Color Temp | CRI | Wattage Replacement | Rated Life L70 (Hrs) | Power Factor | DLC® | UL® | Location Rating | Additional Info    |
|--------------------------------------|-----------|-------|------------|--------------------|---------|----------|----------|----------------|--------------------|-----|---------------------|----------------------|--------------|------|-----|-----------------|--------------------|
| Ballast Bypass—4' LED XL Glass Tubes |           |       |            |                    |         |          |          |                |                    |     |                     |                      |              |      |     |                 |                    |
| T8                                   | G13       | 9.5   | 93132548   | LED9BDT8/G4/830XL  | 120-277 | 20       | 48       | 1550           | 3000K              | 80  |                     | 70,000               | >.9          |      | Yes | Damp            | Double-Ended Power |
|                                      | G13       | 9.5   | 93132549   | LED9BDT8/G4/835XL  | 120-277 | 20       | 48       | 1600           | 3500K              | 80  |                     | 70,000               | >.9          | Yes  | Yes | Damp            | Double-Ended Power |
|                                      | G13       | 9.5   | 93132550   | LED9BDT8/G4/840XL  | 120-277 | 20       | 48       | 1650           | 4000K              | 80  |                     | 70,000               | >.9          | Yes  | Yes | Damp            | Double-Ended Power |
|                                      | G13       | 9.5   | 93132551   | LED9BDT8/G4/850XL  | 120-277 | 20       | 48       | 1650           | 5000K              | 80  |                     | 70,000               | >.9          | Yes  | Yes | Damp            | Double-Ended Power |
|                                      | G13       | 13    | 93132552   | LED13BDT8/G4/830XL | 120-277 | 20       | 48       | 1950           | 3000K              | 80  |                     | 70,000               | >.9          | Yes  | Yes | Damp            | Double-Ended Power |
|                                      | G13       | 13    | 93132553   | LED13BDT8/G4/835XL | 120-277 | 20       | 48       | 2000           | 3500K              | 80  |                     | 70,000               | >.9          | Yes  | Yes | Damp            | Double-Ended Power |
|                                      | G13       | 13    | 93132554   | LED13BDT8/G4/840XL | 120-277 | 20       | 48       | 2050           | 4000K              | 80  |                     | 70,000               | >.9          | Yes  | Yes | Damp            | Double-Ended Power |
|                                      | G13       | 13    | 93132555   | LED13BDT8/G4/850XL | 120-277 | 20       | 48       | 2050           | 5000K              | 80  |                     | 70,000               | >.9          | Yes  | Yes | Damp            | Double-Ended Power |
|                                      | G13       | 16    | 93132586   | LED16BDT8/G4/830XL | 120-277 | 20       | 48       | 2450           | 3000K              | 80  |                     | 70,000               | >.9          | Yes  | Yes | Damp            | Double-Ended Power |
|                                      | G13       | 16    | 93132587   | LED16BDT8/G4/835XL | 120-277 | 20       | 48       | 2500           | 3500K              | 80  |                     | 70,000               | >.9          | Yes  | Yes | Damp            | Double-Ended Power |
|                                      | G13       | 16    | 93132588   | LED16BDT8/G4/840XL | 120-277 | 20       | 48       | 2550           | 4000K              | 80  |                     | 70,000               | >.9          | Yes  | Yes | Damp            | Double-Ended Power |
|                                      | G13       | 16    | 93132589   | LED16BDT8/G4/850XL | 120-277 | 20       | 48       | 2550           | 5000K              | 80  |                     | 70,000               | >.9          | Yes  | Yes | Damp            | Double-Ended Power |

## IN-LINE FUSE

| Order Code | Description   | Kit Contents               |
|------------|---------------|----------------------------|
| 39017      | BT8-1AFUSEKIT | 1 Fuse (1A), 1 Fuse Holder |

**FOR USE ON OPEN OR ENCLOSED FIXTURES | NONDIMMABLE**  
**AMBIENT OPERATING TEMPERATURE OF -4°F TO 113°F**

To learn more about LED tube lighting solutions, visit [products.gecurrent.com/led-tubes](https://products.gecurrent.com/led-tubes).