


Commercial Hardwire Phase/0-10V Dimmable Power Supplies

(5 x 60W output)

60W 12VDC
120V - 277VAC
50hz/60hz



L-12DCH60X5-120-277V-1

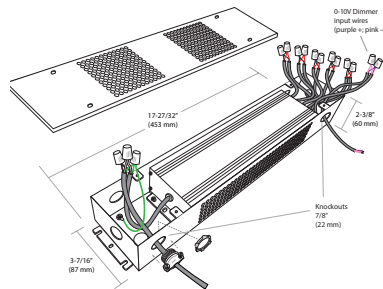


(4x 96W output)

96W 24VDC
120V - 277VAC
50hz/60hz



L-24DCH96X4-120-277V-1

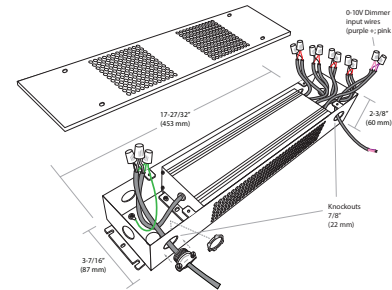


Features:

- 12VDC or 24VDC constant voltage output
- High power factor (Pf > .95)
- Built-in hardwire compartment
- Aluminum housing suitable for dry and damp locations
- 0-10V dimmable with dimming down to 0% when controlled by Tresco® L-WLD-010V dimmer
- Short circuit protection*
- Overcurrent protection
- Overload protection*
- RFI protection
- Class 2

* Automatic reset (no fuses)

Part #	Description
L-12DCH60X5-120-277V-1	12VDC 300W Commercial Hardwire 0-10V Dimmable Power Supply
L-24DCH96X4-120-277V-1	24VDC 384W Commercial Hardwire 0-10V Dimmable Power Supply
L-TRANS-MNT-BL-1	Extra 6-Snap Mounting Block (12VDC)
L-1BRL5-1	Extra 5 Output Barrel Splice (24VDC)

Derating Curve

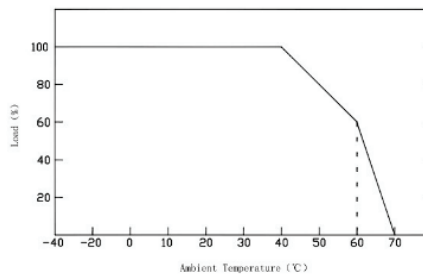

Environmental	-40°F – 104°F (-40C – 40C) see derating curve for higher temperatures 20 – 90% RH, non-condensing Dry or Damp Location
Dimming	Forward phase / leading edge MLV and Reverse phase /trailing edge ELV, and other TRIAC dimmers 0-10V dimming
Weight	6 lbs (2.7kg)
Size	17-27/32" L x 3-7/16" W x 2-3/8" H (453 mm x 87 mm x 60 mm)