


2" **LED** Downlight Series
DLR2 | DQR2 | DLG2



Small lights. **Big impact.**

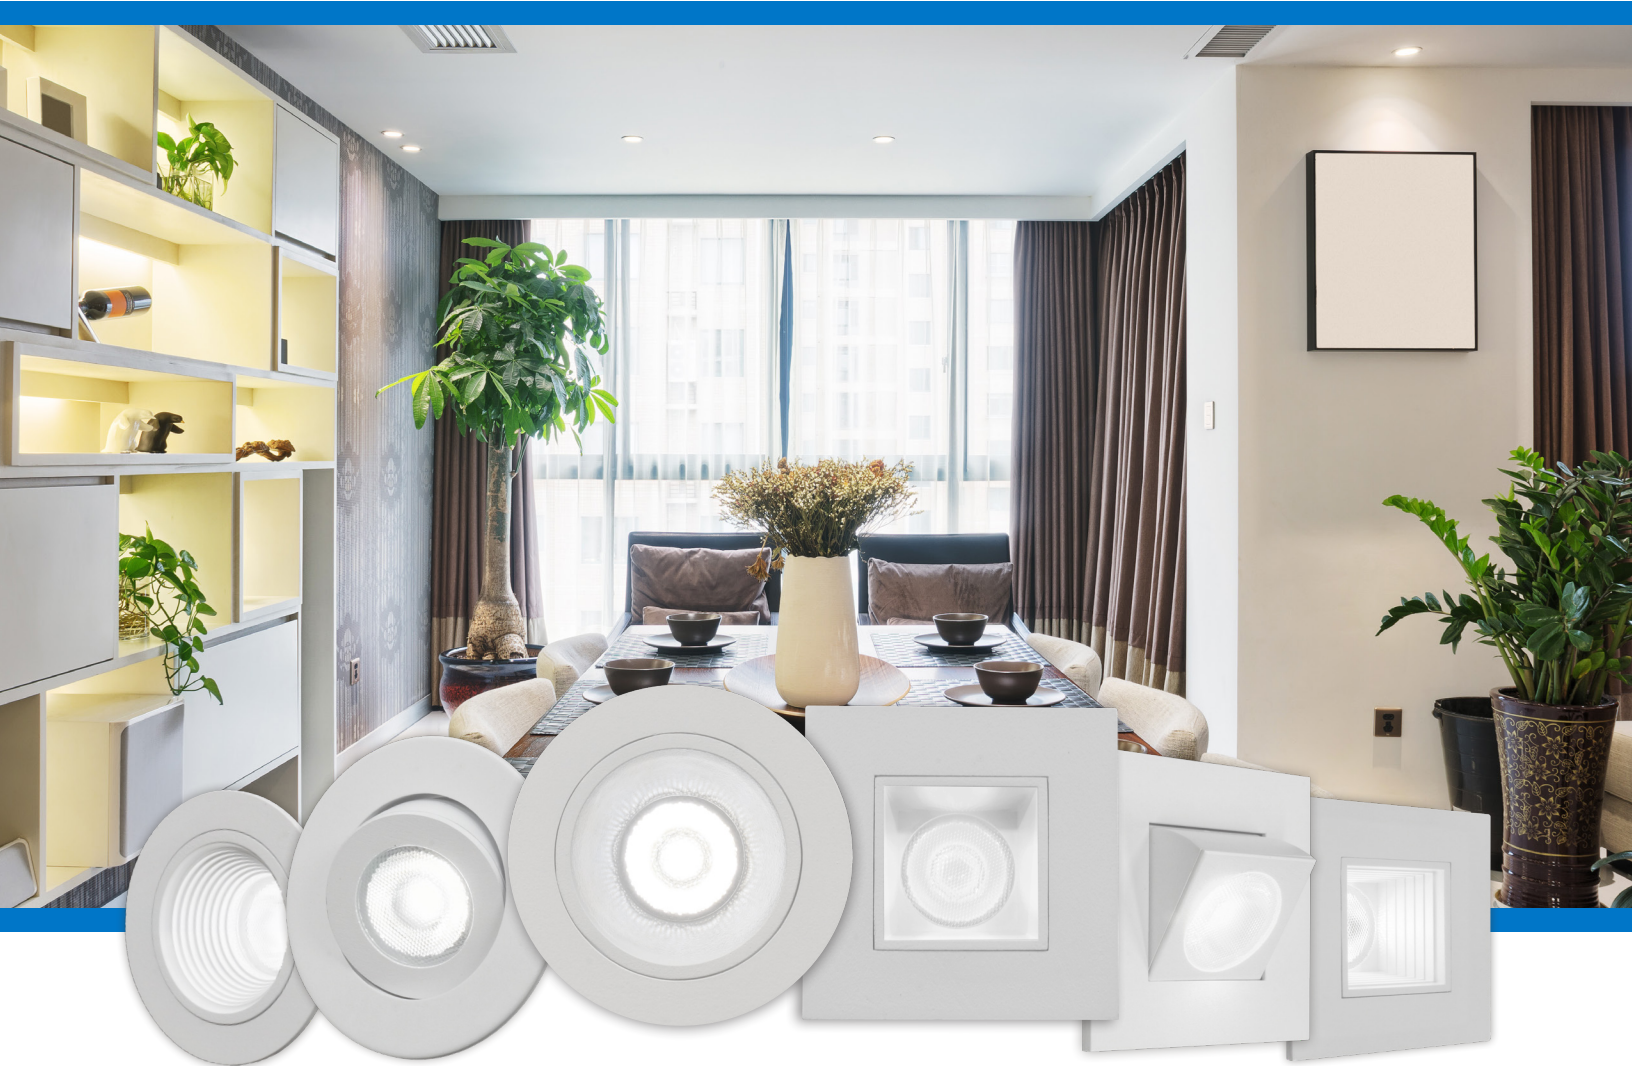


NICOR's **D-Series luminaires** offer a comprehensive family of LED downlight fixtures that complement one another regardless of your design space needs. The new 2" family packs a punch with its small, elegant design along with its high lumen output. Not only does this family work perfectly for accent

and task lighting, but the lighting output allows you to bring general ambient lighting into a space with a very small, elegant appearance. From LED color rendering and trim finishes to fixture performance, this series is a perfect choice for commercial, retail, institutional, and residential applications.

DLR2

2" Recessed **LED** Downlight

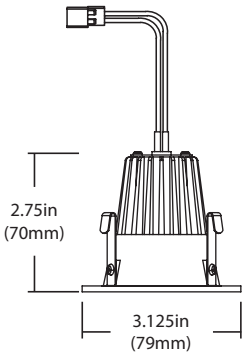


Dimmable


Die Cast Aluminum


Optic Options


UP TO 710Lm


>90 CRI
R9 greater than 50

TRIM OPTIONS

 WHITE

 NICKEL

 OIL RUBBED BRONZE

 BLACK




TRIM OPTIONS

• Smooth
Baffle •



DLR2

2" Recessed **LED** Downlight w/baffle

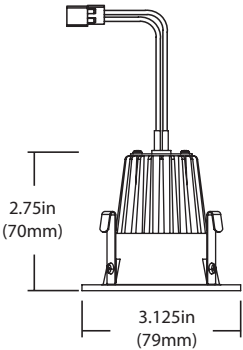

TRIM OPTIONS

 WHITE

 NICKEL

 OIL RUBBED BRONZE

 BLACK


Dimmable


Die Cast Aluminum




Optic Options


UP TO 710Lm



>90 CRI
R9 greater than 50



DQR2
2" **LED** Downlight Square

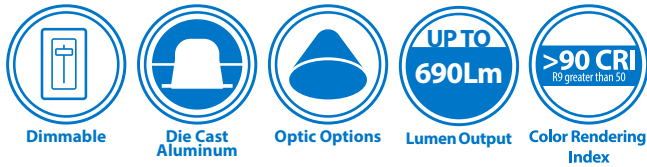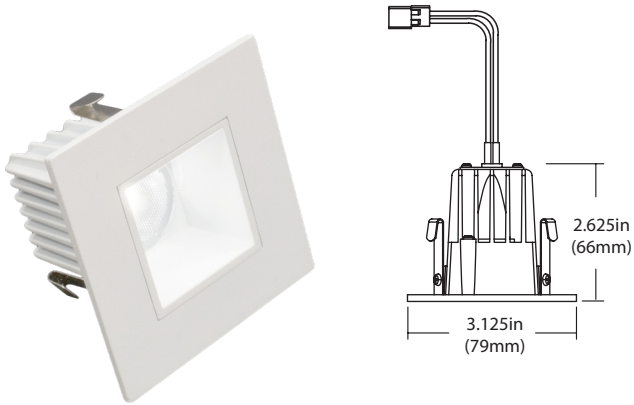



DQR2-AA
2" **LED** Adjustable Downlight Square

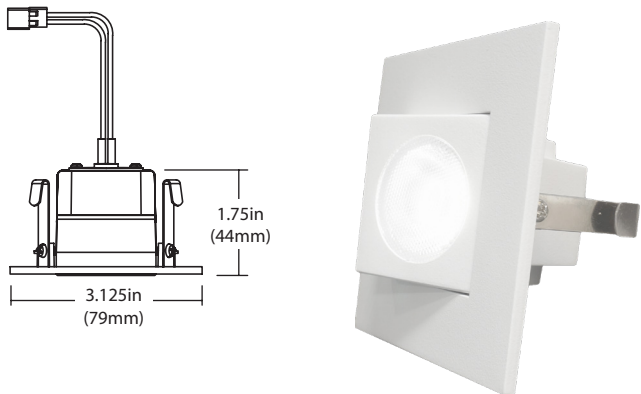


TRIM OPTIONS
• Smooth
• Baffle •

Adjustable Wall Wash
DQR2-AA and DLG2 both offer adjustable trims to provide wall wash lighting.


DQR2
2" **LED** Downlight Square w/baffle

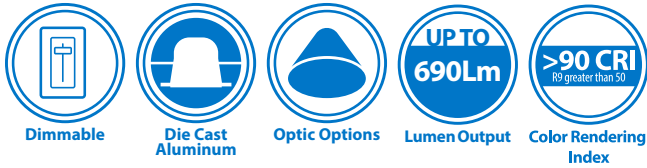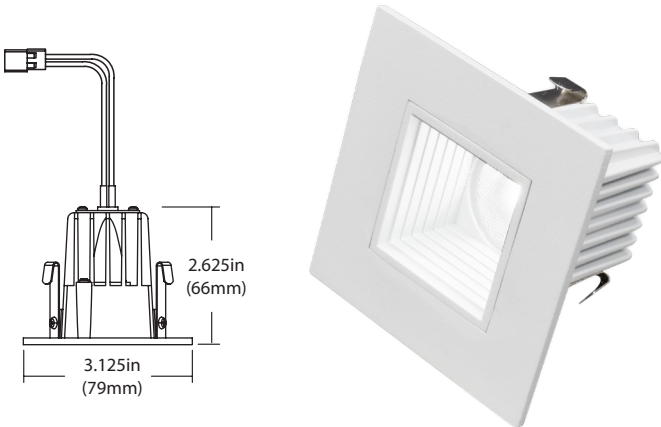

DLG2
2" **LED** Downlight Gimbal

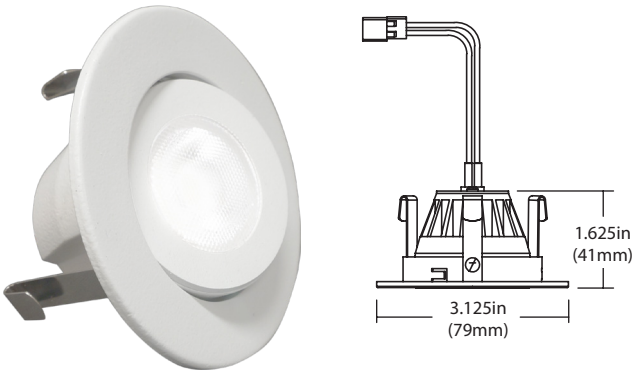

Beam Angle Options

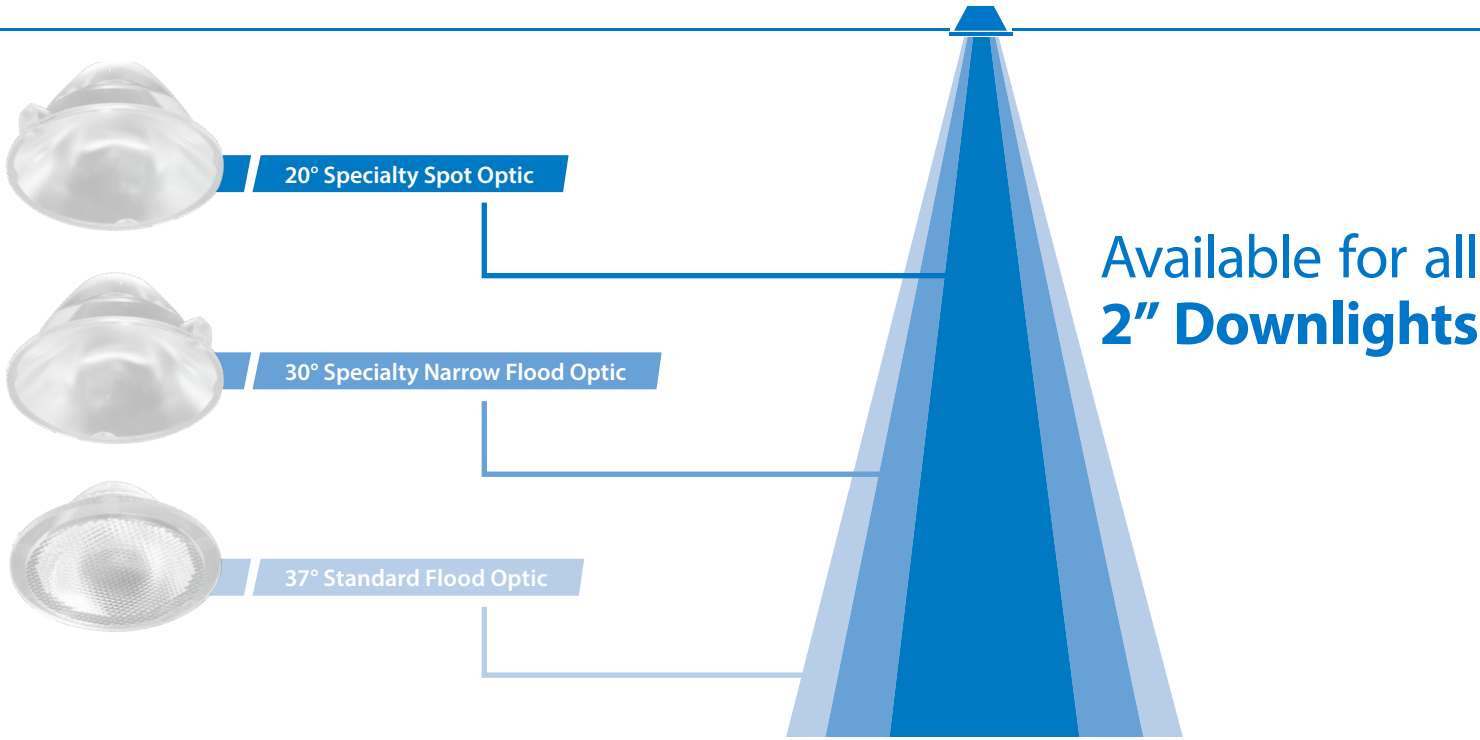

Features

Friction Clips
Compatible with NICOR 2" recessed housings using a friction clip system for installation.

Multiple Color Options
White, black, nickel, and oil rubbed bronze options available.

Beam Angle Options
Available in 20°, 30°, and 37° beam angles.

Superior Color Rendering
NICOR's 2" downlights are engineered for higher accuracy color rendering. CRI > 90.

Durable Construction
Durable all metal construction

Easy Installation
Snap-in Ideal connectors make installation into NICOR 2" housings quick and easy

- Construction**
- Cast aluminum trim routes heat away from electrical components
 - NICOR 2" LED housing required for use of 2" LED Downlight Series
- Optical System**
- Optical lens diffusers eliminate "hot spots" and provide smooth, uniform light
 - Beam spread options available: Standard Flood, Narrow Flood, and Spot
- Electrical**
- Utilizes high performing LEDs with greater than 90 CRI and an R9 greater than 50
 - Dimmable to 10% with most standard triac dimmers
 - Operating temperature rating of 0°F to 120°F (-18°C to 49°C)
 - Lifetime rated for greater than 35,000 hours
 - LM-79, LM-80 testing performed in accordance with IESNA standards
 - 120V input to driver
- Finish**
- Exterior white powder coat finish
 - Also available in Black, Oil-Rubbed Bronze and Nickel
- Installation**
- NICOR's 2" recessed housings required: Available in remodel, new construction, and IC/ Airtight new construction
 - Quick and easy installation with a snap-in IDEAL connector and friction clip mounting system
- Warranty**
- 5-year limited system warranty standard

Product Information	DLR2	DQR2	DQR2-AA	DLG2
LED Lifetime:	35,000 hrs	35,000 hrs	35,000 hrs	35,000 hrs
Input Voltage: (input to driver located in 2" housing)	120V	120V	120V	120V
Power Draw:	9W	9W	9W	9W
Delivered Lumens*:	680 Lm	631 Lm	696 Lm	700 Lm
System Efficacy*:	78 Lm/W	71 Lm/W	81 Lm/W	82 Lm/W
Correlated Color Temp:	3000K	3000K	3000K	3000K
Color Rendering Index:	93 CRI	93 CRI	92 CRI	92 CRI

* Performance data shown at 3000K
For more information, visit www.nicorlighting.com

WET LOCATION RATED

5 YEAR WARRANTY

Can be used to comply with 2015 IECC Table JAB-2015-E

T24
High-Efficient LED Light Source

CERTIFIED

DLG2 & DQR2-AA not Wet Location Rated

ORDERING INFORMATION


Example: DLR2-10-120-3K-WH-BF-NF

Series	Version	Housing Input Voltage	CCT's	Trim	Baffle	Optics
DLR2	10 (v 1.0)	120 (V)	2K (2700)	WH (white)	blank (no baffle)	blank (37° Standard Optic)
DQR2			3K (3000)	BK (black)*	BF (baffle)**	NF (30° Narrow Optic)
DQR2-AA			4K (4000)	NK (nickel)*		SP (20° Spot Optic)
DLG2				OB (oil-rubbed bronze)*		

* only available as special order. Contact NICOR for more info.
** only available for DLR2 and DQR2.

LED Housings

Remodel Housing



IC RATED

AIRTIGHT HOUSING

5 YEAR WARRANTY


DAMP LOCATION RATED

CERTIFIED

ORDERING INFORMATION

Model Number	Description
12202R-LED-ICAT	2" LED Remodel Airtight Housing

New Construction Housing

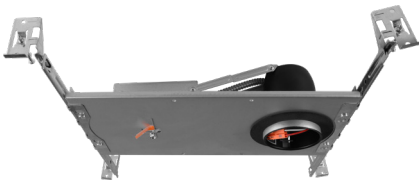

IC RATED

AIRTIGHT HOUSING

5 YEAR WARRANTY

DAMP LOCATION RATED

CERTIFIED

ORDERING INFORMATION

Model Number	Description
12201-LED-ICAT	2" LED New Construction Airtight Housing

New Construction 120-277V Housing



IC RATED

AIRTIGHT HOUSING

5 YEAR WARRANTY

DAMP LOCATION RATED

CERTIFIED

ORDERING INFORMATION

Model Number	Description
12300A-LED	2" LED IC/AT 120-277V New Construction Housing

Warehouse Locations

Albuquerque, NM	Detroit, MI
Atlanta, GA	Folcroft, PA
Buford, GA	Roseville ,CA

T 800.821.6283

F 800.892.8393

www.nicorlighting.com

2200 Midtown Place NE
Albuquerque NM 87107 USA



LIT-2IN 20230307

©2023 NICOR® • ALL RIGHTS RESERVED

NICOR®