


# versatile™ 4C Mailbox, 4C11S-09

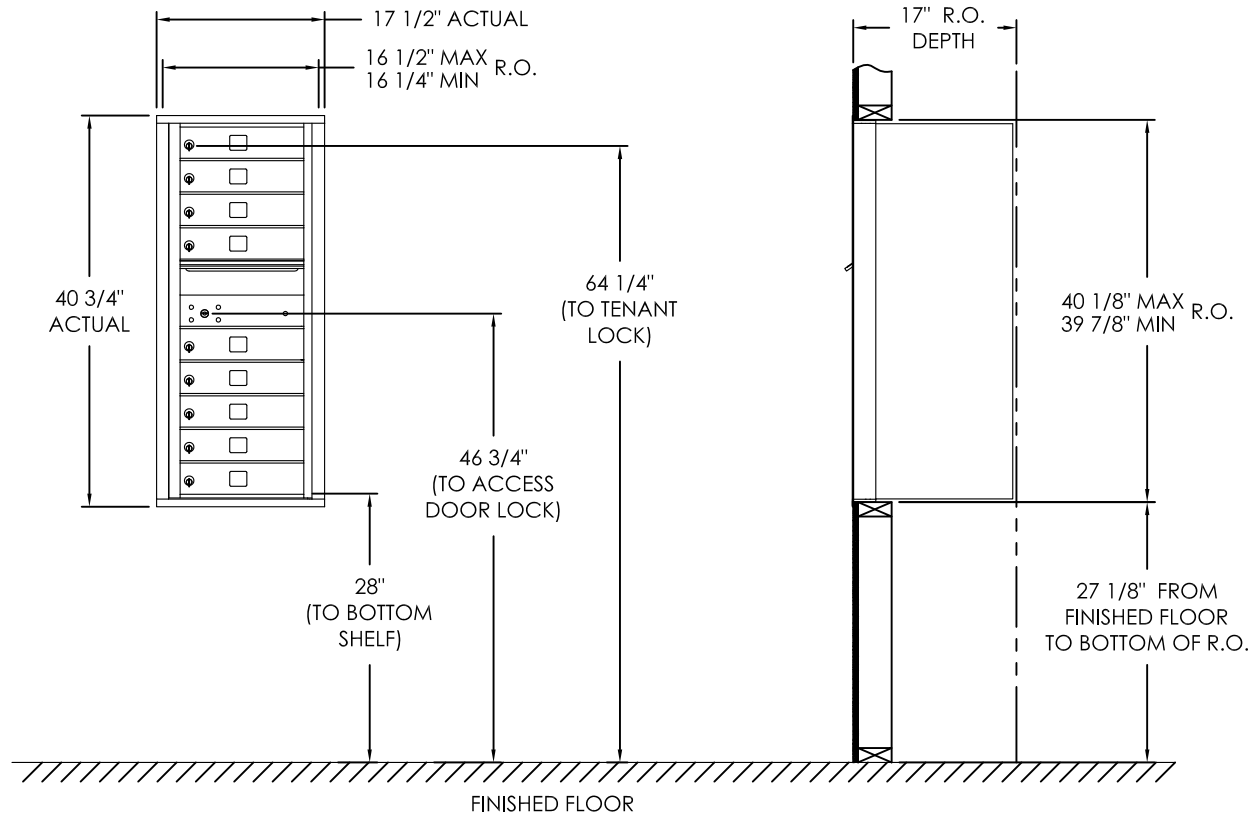

## COMPARTMENT CHART

| DESCRIPTION   | COMPARTMENT | COMPARTMENT SIZE         | QTY. |
|---------------|-------------|--------------------------|------|
| MAILBOX       | MB1         | 3' H x 12' W x 15' D     | 9    |
| OUTGOING MAIL | OM2         | 6-1/2' H x 12' W x 15' D | 1    |

### Notes:

- This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
  - At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
  - No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
  - No patron (tenant) lock shall be positioned more than 67" AFF.
  - No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
  - The USPS Arrow lock shall be positioned 36"- 48" AFF.
- This 4C mailbox can also be used for private applications.
- The rough opening width for multi-unit 4C installations is provided using the Florence configurator: [www.florencemailboxes.com/configurator](http://www.florencemailboxes.com/configurator).

PRODUCT SERIES: VERSATILE™ 4C FRONT LOAD MAILBOX

**FLORENCE**  
CORPORATION

5935 Corporate Drive • Manhattan, KS 66503  
800.275.1747 • [www.florencemailboxes.com](http://www.florencemailboxes.com)

|                |            |               |          |
|----------------|------------|---------------|----------|
| MODEL          | 4C11S-09   | REV           | E        |
| SCALE          | NONE       | LAST REV DATE | 07/02/19 |
| DRAWING NUMBER | 4C11S-09CS | DRAWN BY      | RAK      |