


Lumination® PWS Series

4ft | Narrow Wrap Surface Mount

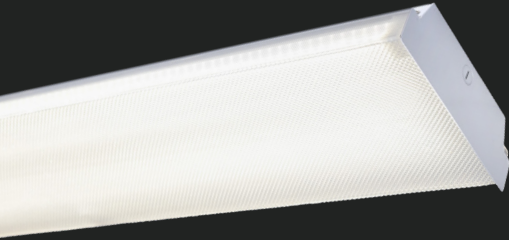

CUSTOMER NAME _____

Project Name _____

Date _____ Type _____

Catalog Number _____

The PWS Series is contractor focused wrap surface mount luminaire suitable for indoor and general lighting. This narrow configured 4 ft. luminaire is designed for simplicity and is ideal for both commercial and industrial applications. This PWS offers the look of a traditional wrap while staying within budget requirements. PWS is suitable for both new construction and retrofit solutions while offering a five-year warranty. Refer to the LWS series for wider configurations, alternate CCT's/Lumens or 2' lengths.

ProLine®

CONSTRUCTION

Housing:	Die-formed heavy-gauge steel. With smooth hemmed sides for safe handling
Lens:	Precision formed optical assembly comprised of high specularity reflector, and a transmissive lens
Weights:	10 pounds

OPTICAL SYSTEM

Lumens:	Up to 3800 lumens
Wattage:	Up to 33W
Efficacy:	Up to 115 LPW
CCT:	4000K
CRI:	80+, R9>0

ELECTRICAL

Input Voltage:	120–277V
Input Frequency:	50/60Hz
Power Factor (PF)*:	> 0.9%
Total Harmonic Distortion (THD)*:	<20%

* PF and THD may vary with options

CONTROLS

Dimming: Not Available

AMBIENT TEMPERATURE

TYPE	TEMPERATURE RATE
OPERATING TEMPERATURE	0°C TO +25° C

LUMEN MAINTENANCE

LXX(10K) @ Hours 50,000 HR
L70

MOUNTING

- Surface Mount w/Pre-drilled mounting holes
- Cable suspended mount (order cables as a separate accessory)
- Wiring and mounting accessed via bottom of luminaire.
- Ideal for industrial and commercial applications as well as stairwells, offices, and storage locations.

DESIGN LIFE & WARRANTY

- Damp Location Rated
- ETL LISTED
- RoHS compliant
- ANSI C82.77 Compliant
- Current's Limited 5-year Warranty:
Please refer to document [IND599](#) for more information.



Lumination® PWS Series

4ft | Narrow Wrap Surface Mount

Ordering Information

CUSTOMER NAME

Project Name _____

Date _____ Type _____

Catalog Number _____

Ordering Information:

PWS **4N** **A** **0** **38** **MM** **840** **QQ** **SM** **WHITE**

FAMILY	FIXTURE TYPE	NOMINAL LUMENS	VOLTAGE	NOMINAL LUMENS	DISTRIBUTION	CRI/CCT	CONTROLS	MOUNTING	FINISH	OPTIONS
PWS = ProLine® Wrap Surface Mount	4N = 4 ft. Narrow	A = 1 st Generation	0 = 120-277V	38 = 3800	MM = Medium Lambertian	840 = 80 CRI /4000K	QQ = Non-Dimming	SM = Surface Mount	WHITE = White	Blank = None




ORDERING SKU	CAT LOGIC	DESCRIPTION	LUMINAIRE LUMENS	LUMINAIRE TOTAL SYSTEM WATTS	EFFICACY (LPW)
93144546	PWS4NA038MM840QQSMWHITE	4N - 4' NARROW (9")	3800	33	115

NOTE: Above values are based on the default switch setting for CCT (4000K). For detailed ratings at other CCT/wattages, please see chart below.

ACCESSORIES (SOLD SEPARATELY)

PART	DESCRIPTION
PRT0202	Cable Mount 5 ft
PRT0203	Cable Mount 10 ft
PRT0204	Cable Mount 15 ft

DIMENSIONS

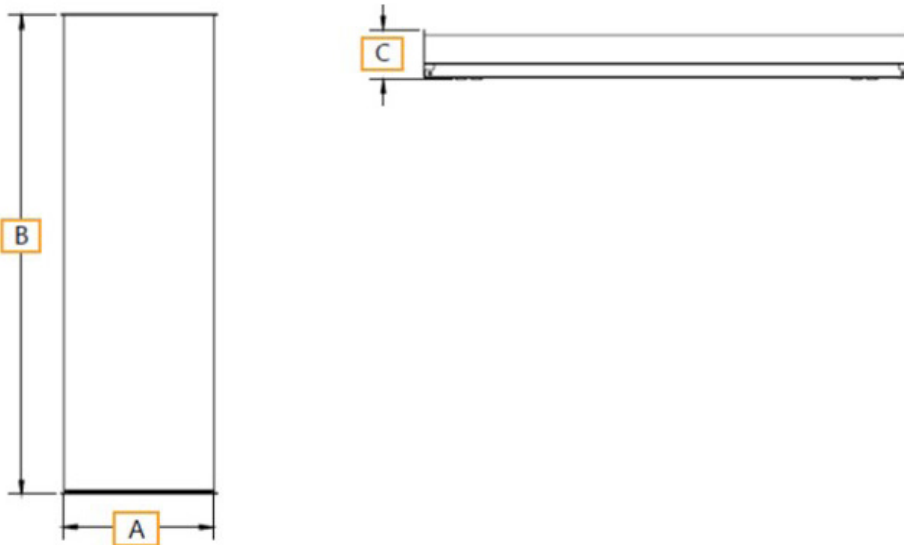

DIMENSIONS	
A	9in (299mm)
B	47.8in (1213mm)
C	3.25in (83mm)

Lumination® PWS Series

4ft | Narrow Wrap Surface Mount

Photometric Data

CUSTOMER NAME


Project Name _____

Date _____ Type _____

Catalog Number _____

PHOTOMETRIC DATA: PSF SERIES

PWS Series 4'
80+ CRI
4000K
 3800 LM
 PWS4NA038MM840QQSMWHITE



ZONE	LUMENS	ZONE	LUMENS	% OF FIXTURE
0-10	134.56	0-20	523.74	13.80
10-20	389.18	0-30	1112.40	29.30
20-30	588.66	0-40	1793.98	47.20
30-40	681.58	0-60	2942.04	77.40
40-50	644.80	0-80	3486.83	91.80
50-60	503.26	0-90	3586.10	94.40
60-70	332.12	10-90	3451.54	90.80
70-80	212.67	20-40	1270.24	33.40
80-90	99.27	20-50	1915.04	50.40
90-100	43.08	40-70	1480.19	39.00
100-110	43.67	60-80	544.79	14.30
110-120	40.91	70-80	212.67	5.60
120-130	32.95	80-90	99.27	2.60
130-140	23.78	90-110	86.75	2.30
140-150	15.88	90-120	127.66	3.40
150-160	8.96	90-130	160.61	4.20
160-170	3.89	90-150	200.27	5.30
170-180	0.80	90-180	213.91	5.60
		110-180	127.16	3.30
		0-180	3800.01	100.00

ProLine®

Every contractor deserves a
 Fast, Reliable, and Trusted Lighting Partner



For Product or Technical Questions:

Email: lightingproinfo@gecurrent.com

Phone: +1 888 694 3533, option 2