

NICOR®




OWG5 LED Wall Pack

OWG5


LED Wall Pack

The OWG5 LED Wall Pack is an enhanced version of the traditional wall pack design, featuring selectable CCT (correlated color temperature), an optional adjustable lumens (wattage) setting, and now with adjustable beam throw. With an impressive output of up to 145 lumens per watt, the OWG5 provides powerful and evenly distributed light. Its installation is hassle-free, allowing attachment to walls or direct mounting on a J-Box using its separable hinged backplate. An internal switch board enables users to customize the CCT within the range of 3000/4000/5000K, adjust the wattage output to high, medium, or low settings, and customize the beam angle to have a near, mid, or far throw. An integral photocell comes standard and can be enabled as needed. Equipped with four knockouts for through-wiring or sensor additions, the OWG5 is an excellent choice for security and perimeter lighting various commercial locations and multi-family complexes.

Dimensions

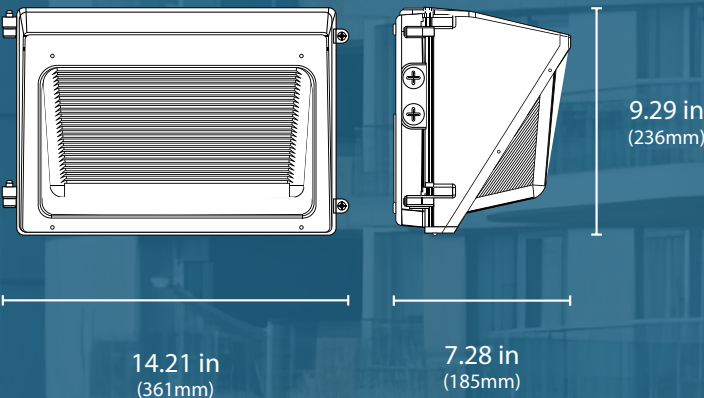

FEATURES

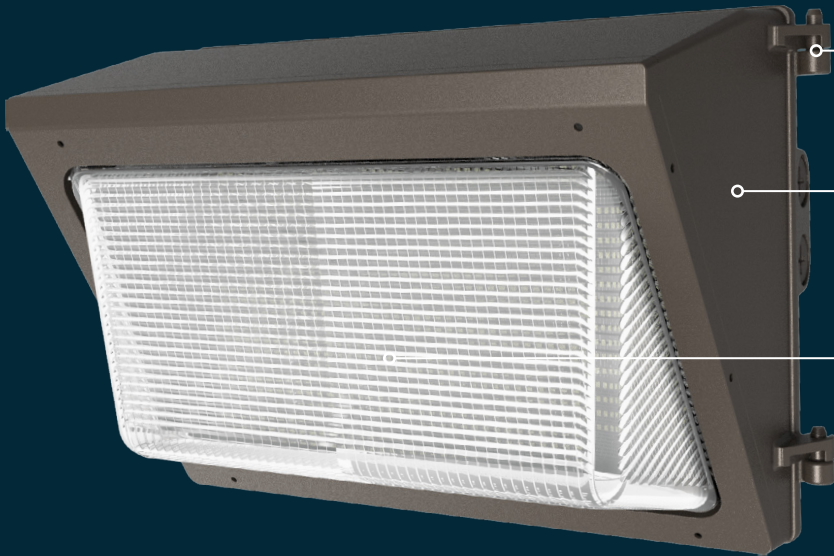

Separable Hinged Backplate
Toolless for easy installation and maintenance

Die-Cast Aluminum Housing
Fine-textured, UV-stabilized powder coat finish, built for the outdoors

Tempered Clear Prismatic Glass
Durable glass lens resists yellowing for clear, consistent lighting in any outdoor condition.



CRI
80+



Lumens
6050-18694



Lifetime
>50,000 hrs



Beam Throw
selectable

Select the Perfect Light
The OWG5 LED Wall Pack features three selectable options that allows for a more customized lighting for your specific needs.

40W 50W 60W

50W 65W 80W

80W 100W 120W

30K 40K 50K

NEAR



Ideal for walkway & perimeter lighting

MID





Ideal for general area lighting

FAR



For maximum throw and lighting

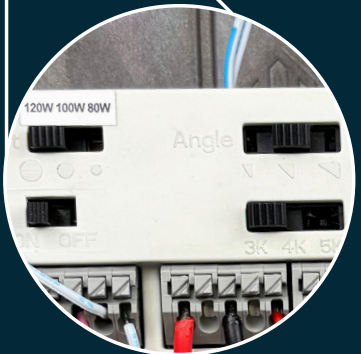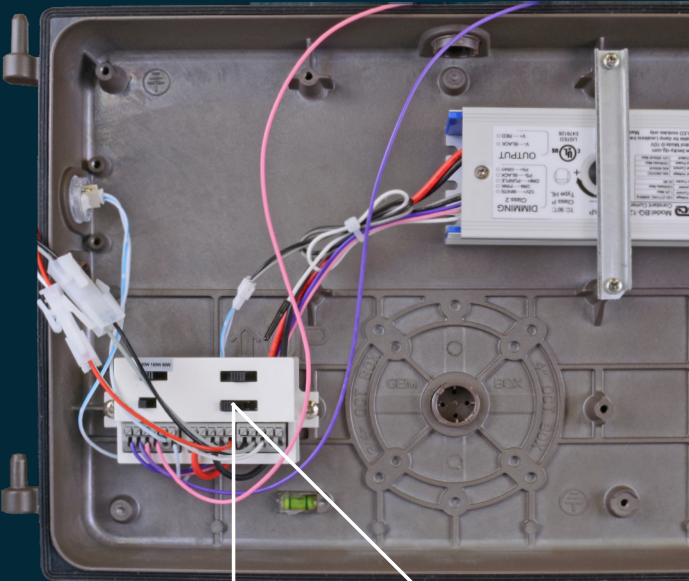

Ordering Information

Example: OWG5080SUS8BZ

Series	Version	Wattage	Voltage	CCTs-Select	CRI	Finish	Sensor Socket	Emergency
OWG	5	060S (40/50/60W)	UNV (120-277V)	S (3K/4K/5K)	8 (80) CRI	BZ (Bronze)	_ (None)	_ (None)
		080S (50/65/80W)					S (Socket)	E (9W battery)
		120S (80/100/120W)						

See spec-sheet for additional ordering information.



LIT-QRG
20250305
©2025 NICOR® • ALL RIGHTS RESERVED

Warehouse Locations

Albuquerque, NM
Buford, GA
Roseville, CA
T. 800-821-6283 F. 800-892-8393



2200 Midtown Place NE Albuquerque, NM 87107 USA | nicorlighting.com