
James
BY SONANCE

WEDGE X SERIES DATA SHEET


TECHNICAL SPECIFICATIONS

	WX48QT	WX58QT
SKU	60692 - Each	60693 - Each
Tweeter	0.75” (19mm) four titanium domes, ferrofluid-cooled, acoustic back chamber	0.75” (19mm) four titanium domes, ferrofluid-cooled, acoustic back chamber
Woofer	(2) 4” (102mm) aluminum cone, santoprene surround	(2) 5.25” (133mm) aluminum cone, santoprene surround
Dispersion Technology	Quadratech tweeter with cymatic diffuser	Quadratech tweeter with cymatic diffuser
Crossover Technlology	2-way CDX crossover, adjustable boundary switch	2-way CDX crossover, adjustable boundary switch
Frequency Response	70Hz - 20Hz +/-3dB	60Hz - 20Hz +/-3dB
Impedance	4 ohms nominal	4 ohms nominal
Sensitivity (2.83V/1m)	86dB SPL	88dB SPL
Recommended Power	50 watts minimum; 100 watts maximum	50 watts minimum; 100 watts maximum
Environmental	Marine ready, weatherproof wire gland	Marine ready, weatherproof wire gland (standard, recessed wire terminal option available on WX58QT model only)
Grille	Perforated aluminum with grille clip retention	Perforated aluminum with grille clip retention
Mounting	Bracket included	Bracket included
Product Dims (WxHxD)	22” x 4.76” x 4.76” (558.8mm x 120.9mm x 120.9mm)	22” x 6.23” x 5.86” (558.8mm x 158.24mm x 148.84mm)
Build to Order (W)	Standard or custom width (seamless grille: up to 96”)	Standard or custom width (seamless grille: up to 96”)
Product Weight	8.4 lbs. (3.81kg)	10.94 lbs. (4.96kg)
Bracket Weight	1.2 lbs. (0.54kg)	1.48 lbs. (0.67kg)
Shipping Weight	16 lbs. (7.26kg)	22 lbs. (9.98kg)


WX58QT Front View

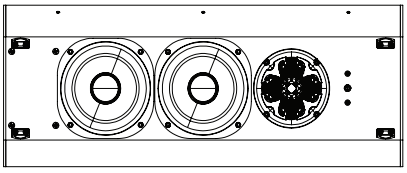


Back View
Recessed Terminal (Optional, for WX58QT model only)

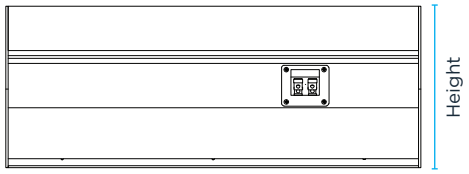


Back View
Weatherproof Wire Gland (Standard)

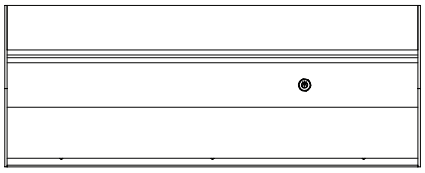


WX48QT Front View

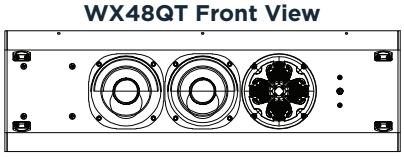

Top View

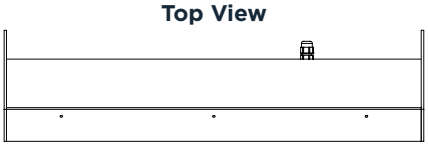

Side View



©2026 Sonance. All rights reserved. Sonance and James by Sonance are a registered trademarks of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance and James by Sonance product specification information visit our website at www.sonance.com.