

OBL2 LED Bollard




OBL2


LED Bollard

The next generation of NICOR LED Bollards offers versatile and energy-efficient outdoor lighting. Featuring selectable lumen output and wattage settings and four different head styles, it combines durability and contemporary design, providing long-lasting performance and high-quality light. Constructed from robust materials and designed to withstand harsh weather conditions, this bollard light ensures reliable operation and minimal maintenance. Enhance the safety and aesthetics of your outdoor spaces with the adaptable and efficient NICOR OBL LED Bollard.

Dimensions

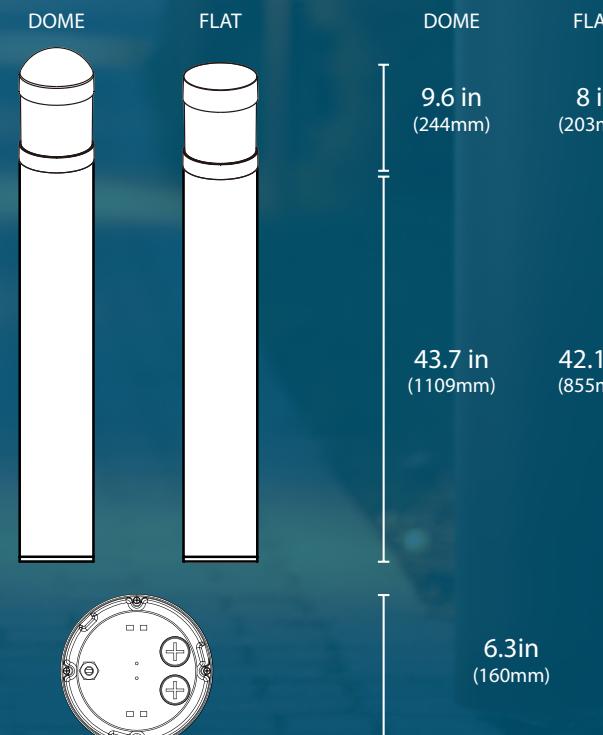

FEATURES

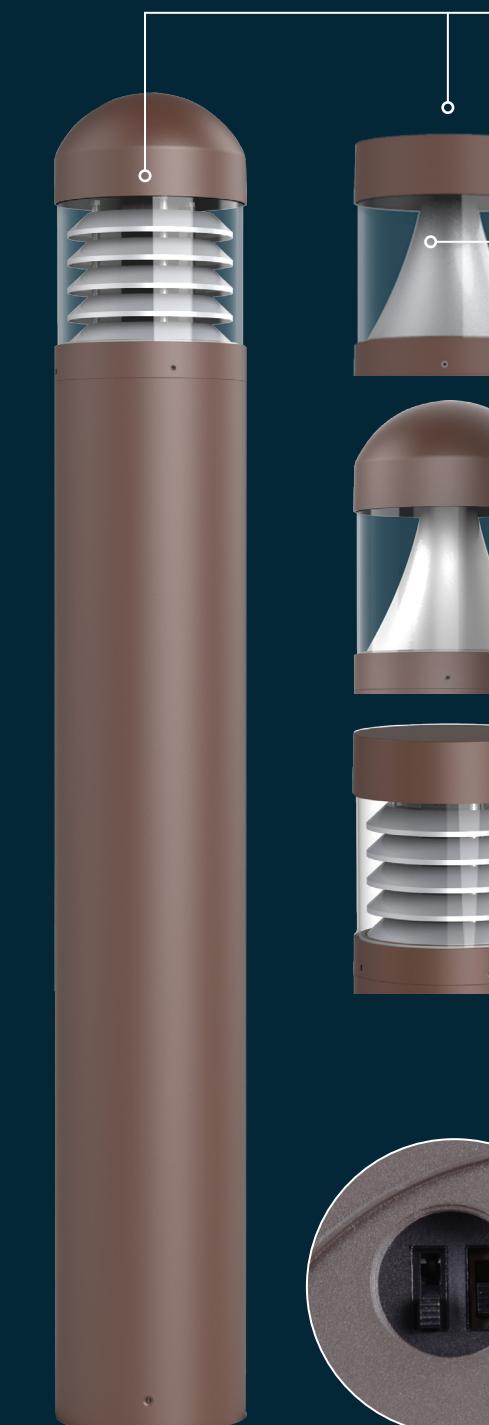

Ordering Information

Series	Version	Distribution	Top Style	Body Style	Wattage	Input Voltage	CCT	CRI	Finish Color	Body
OBL	2	C (Cone)	F (Flat)	RD (Round)	24S (14/19/24W)	U (120-277)	S (30/40/50K)	7 (70+)	BZ (Bronze)	B
		L (Louver)	R (Round)							

See spec-sheet for additional ordering information.

Versatile Head Options

Choose between a sleek flat-top style for a modern aesthetic or the classic dome design for a timeless appeal.

Customized Light Distribution

Select the cone for a more focused lighting distribution or the louvered style for a soft, glare-free glow.

Cone



Wattage
14/19/24



CRI
>70



Lumens
2041-3586



Beam Angle
H: 133.9°
V: 143.9°

Louvered



Wattage
14/19/24



CRI
>70



Lumens
962-1725



Beam Angle
H: 180°
V: 180°

Select the Perfect Light

The OBL2 Bollard features selectable wattage and color temperature options via an integrated switch.


30K 40K 50K



14W 19W 24W



Example: OBL2CFRD24SUS7BZB



LIT-OBL2-10PK
20250129

© 2025 NICOR® • ALL RIGHTS RESERVED

Warehouse Locations

Albuquerque, NM
Buford, GA
Roseville, CA
T. 800-821-6283 F. 800-892-8393



2200 Midtown Place NE Albuquerque, NM 87107 USA | nicorlighting.com