



# Select TX<sup>®</sup> Cuttable Light Bar

CABINET SIGN LIGHTING SYSTEMS

Flexible and Customizable  
LED Solution

Select TX<sup>®</sup> Cuttable Light Bar is a product designed with the ability to be cut every 3¼" / 83 mm, allowing signmakers to create indoor illuminated signage and displays that fit their vision.


# Select TX® Cuttable Light Bar

## Features



- Wide 160° beam angle
- Aluminium PCB for enhanced thermal dissipation and longer LED life
- CRI >Ra80 allows much better colour rendition in signage and advertising cases
- Efficacy: up to 100 lm/W
- 24 Volt DC, Class 2 (UL), Class III (IEC)
- IP20
- 5-year limited warranty

## Technical Summary

Specification	
Input Voltage	24VDC
Lumens	1100 lm
Power Consumption	10.8 W
Lifetime @L70B50	50,000 Hrs
Operating Ambient Temperature	-25°C to +60°C
Storage Temperature	-25°C to +70°C
Environmental protection	IP20

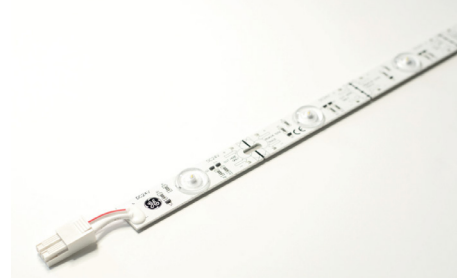

## Product Dimensions

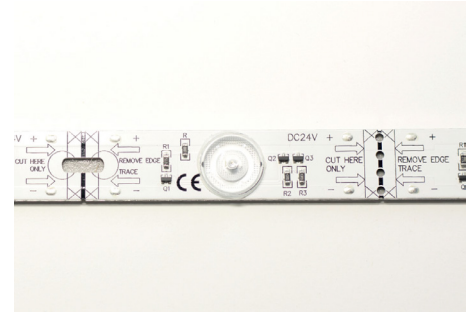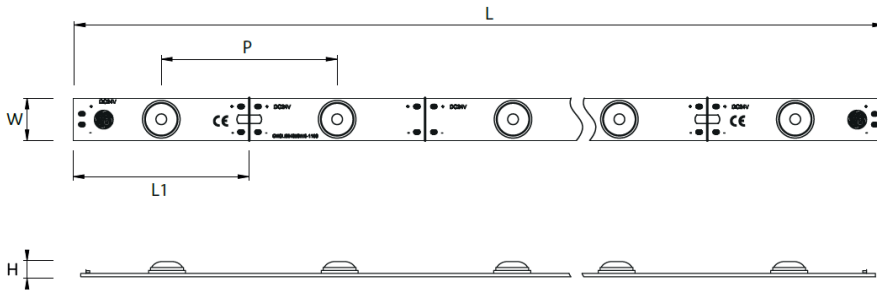


SKU	Length (L)	Width (W)	Height (D)	L1	P
GECLB2465-1160-2	1162 mm	20 mm	8.5 mm	83 mm	83 mm

## Specifications


SKU	Description	CCT	Rated Luminous Flux (lm)	LED Length (mm)	N° of	Control
93135341	GECLB2465-1160-2	6500K	1100	1162	14	Static

## Accessories

SKU	Type	Description
93135342	GECLB-CTK-0250-2	Connector Lead Kit 250 mm
93135343	GECLB-CTK-1500-2	Connector Lead Kit 1500 mm
93135344	GECLB-CTK-0100-2	Power Lead Kit 100 mm

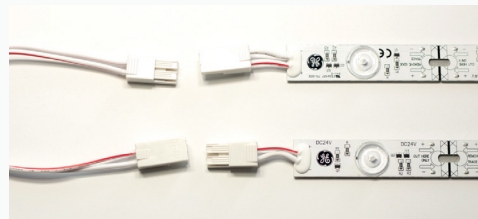

Power Lead Kit 100 mm

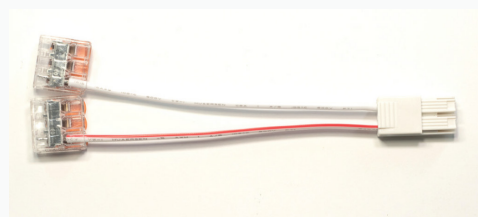

Connector Lead Kit