


OAL5 LED Area Light

OAL5 LED Area Light

The OAL5 LED Area Light delivers high efficiency with maximum energy savings and advanced controls to suit a variety of applications. Its robust, low-profile housing is comprised of die-cast aluminum and includes an adjustable, multi-function mounting arm (pole+slipfitter) for simpler, quicker installation. The OAL5 is a versatile fixture offering 50/60/80W selectability with 3/4/5K CCT and distribution options of Type II, III, IV and V. It is ideal for lower mounting heights in parking lots, recreational or public venues, walkways, campuses, and other commercial environments.

Dimensions

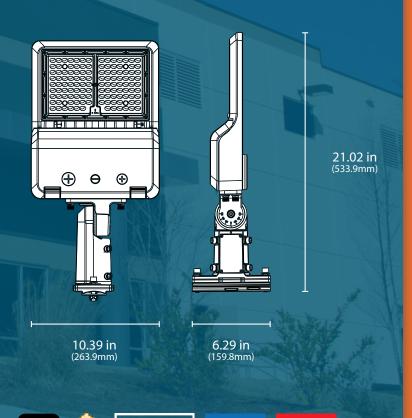

FEATURES

3-Pin Photocell Receptacle & Shunt Every OAL5 comes standard with a 3-pin receptacle and shunt, with a 7-pin option also available.




Quickly adapt or replace lenses on-site for versatile lighting solutions.







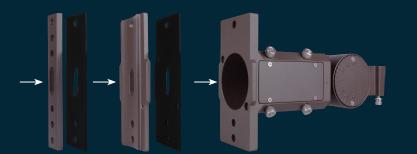

Multi-Mount Arm

Combines straight arms, pole arms, and slipfitters into a quick-install dovetail design

Select the Perfect Light

The OAL5 LED Area light features low selectable wattage (high-voltage option available) and color temperature options via an integrated switch located on the front



ACCESSORIES















djustable Pole Mounting Arm

Straight

Slipfitter

Trunion Mountina Arm

Wall Mou

Glar Shie

& Shunt

Aicrowave Sensor

Orde	Ordering Information Example: OAL5080SUS8BZ.									
Series	Version	Wattage	Voltage	CCTs	CRI	Finish	Optic	Photocell Receptacle	Motion Sensor Socket	
OAL	5	080S (50/60/80W)	U (120-277V)	S (3K/4K/5K)	8 (80+)	BZ (Bronze)	2 (Type II) **	Blank (3 pin with cap)	S (12V Socket)	
			H (277-480V)				3 (Type III) *	7 (7 pin)		
							4 (Type IV) **			
							5 (Type V) **			

Specifications and dimensions subject to change without notice. *Stocked distribution **Distribution type has modification lead time. Consult NIC





LIT-OAL5-10PK 20250129 ©2025 NICOR® • ALL RIGHTS RESERVED

Warehouse Locations

Albuquerque, NM Buford, GA Roseville, CA

T. 800-821-6283 F. 800-892-8393

