



Commercial Recessed **LED** Downlight

CLR6 | CLR8 Select



6 & 8"
CCT & Lumen
Selectable

3K
1000LM
3.5K
1500LM
4K
5K
*8" S Lumens are 1500LM & 2000LM
8" H Lumens are 2000LM & 3000LM

More Adaptable than Ever!



CLR Select

6" and 8" Commercial Recessed **LED** Downlight

Simple Versatile Solutions

Designed for both new construction and retrofit applications, the CLR Select series can be installed directly into drywall, a ceiling grid or an existing 6" or 8" mounting frame using spring loaded retention tabs. The CCT and output selectable design allows for easy adjustment to 3000, 3500, 4000, or 5000K and standard or high output. With accessory trims in nickel, oil-rubbed bronze and black, and offering a full range of dimming from 0-10 volts, the CLR Select is adaptable to most any environment. The versatility of this light source is perfect for commercial applications, such as educational, governmental, retail and grocery, office or hospitality lighting.



Selectable CCT

External switch allows easy CCT Selection: 3000K, 3500K, 4000K or 5000K

Selectable Lumens

External switch allows easy output Selection: 1000LM & 1500LM for 6", 1500LM & 2000LM for 8" Standard, and 2000LM & 3000LM for 8" High Output



Easy Installation

Spring loaded retention tabs and built-in LED Driver is a breeze to install with no housing or frame required



Performance

Provides cool operation without emitting UV radiation or heat

Trim Covers

Oil Rubbed Bronze, Brushed Nickel, and Black




CLR Select

Product Information

Construction

- Cast aluminum flange and heat sink
- Plastic driver housing
- Output and CCT selection switches on back of housing
- Certified for direct contact with insulation
- Meets ASTM E283 airtight requirements

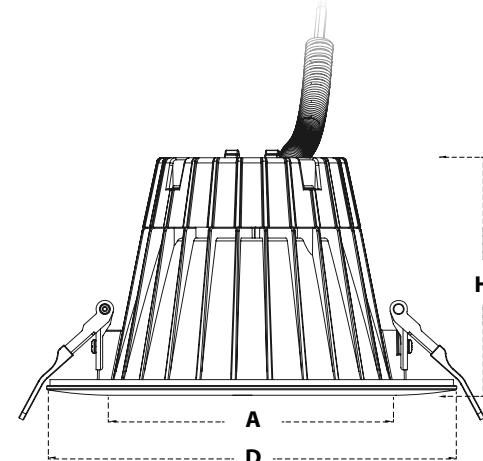

Model (Lm)	Diameter	Height	Aperture Ø
CLR6	7.4in (188mm)	4.5in (114mm)	5.2in (132mm)
CLR8S	9.5in (240mm)	5.2in (132mm)	7.5in (191mm)
CLR8H	9.5in (240mm)	5.6in (143mm)	7.5in (191mm)

Representative image. Exact models vary.

Performance Data					
Model #	Nominal Lumens	Lumens (Lm)	Nominal CCT	Watts (W)	Lumens/Watt
CLR62SWRVS9WH	1000	1058	3000	46.1	130.3
		1069	3500	38.4	137.2
		1082	4000	33.6	138.0
		1063	5000	33.6	138.0
	1500	1552	3000	45.1	142.7
		1569	3500	38.4	150.9
		1588	4000	33.6	154.1
		1559	5000	20.1	150.8
CLR82SWRVS9WH	1500	1599	3000	30.6	127.9
		1610	3500	25.3	132.7
		1625	4000	20.1	134.7
		1602	5000	20.1	150.8
	2000	2078	3000	29.7	140.0
		2092	3500	25.3	146.0
		2111	4000	20.1	150.8
		2082	5000	20.1	150.8
CLR82HWRVS9WH	2000	2054	3000	31.0	126.1
		2155	3500	25.4	131.1
		2190	4000	20.2	135.0
		2153	5000	20.2	151.9
	3000	3037	3000	30.0	138.2
		3186	3500	25.4	144.3
		3239	4000	20.2	151.9
		3184	5000	20.2	151.9

Ordering Information								Example: CLR62SWRVS9WH
Series	Diameter	Version	Output	Voltage	CRI	Color		
CLR	6 (6 inch)	2 (2.0)	S (Standard)	WRV (120-347V)	9 (90 CRI)	WH		
	8 (8 inch)		H (High Output) ¹					

^{1) High Output only available on CLR8H}
Specifications and dimensions subject to change without notice.

Warehouse Locations

Albuquerque, NM Indianapolis, IN
Atlanta, GA Lombard, IL
Detroit, MI Miami, FL
Folcroft, PA Syracuse, NY
Houston, TX Van Nuys, CA

T 800.821.6283

F 800.892.8393
www.nicorlighting.com

2200 Midtown Pl. NE
Albuquerque, NM 87107 USA



LIT-CLR-Select-10PK
20250114

©2020 NICOR® • ALL RIGHTS RESERVED

NICOR[®] | select