



## REL-FR

Fire Rated, Recessed LED Downlight






# REL-FR


Fire Rated, Recessed LED Downlight

The Fire Rated REL Recessed Downlight meets the latest codes for multi-family fire rating with a 2hr certification per UL263. The edge-lit technology makes it a practical solution with high performance and five CCT selectability (2700K, 3000K, 3500K, 4000K, and 5000K). Adjustable spring-loaded retention tabs allow a secure fit and easy installation in both new construction and remodel applications. The REL-FR is an ideal solution for apartments buildings, town homes, condos, and commercial applications.

### Dimensions

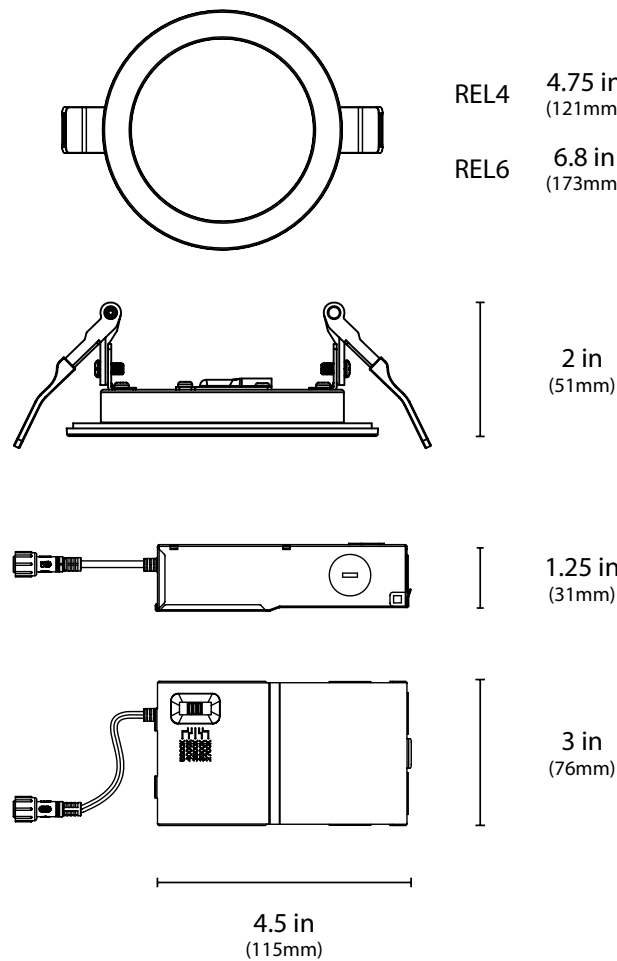

## FEATURES

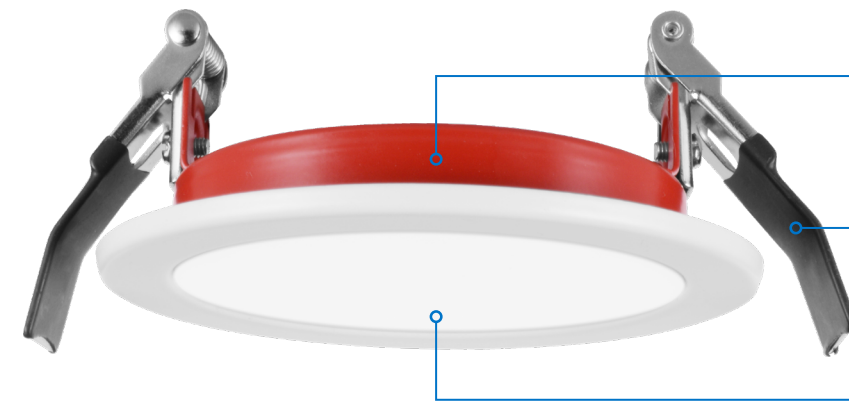

**2-Hour Fire Rating**  
UL263 Certified: Exceeds rigorous testing to meet fire resistance standards

**Easy Installation**  
Spring loaded retention tabs for easy installation into ceilings

**Dimmable**  
Dimmable to 5% with compatible TRIAC and ELV dimmers


CRI 90+  
R9 >60

Lumens  
914-1338

Lifetime  
>72000 hrs

Beam Angle  
109°-111°

**Select the Perfect Light**  
The REL-FR downlight features five selectable color temperature options to match any environment. Go from warm white to daylight with the flip of a switch.



Ordering Information						Example: REL6FR1120SRD9WH
Series	Version	Voltage	CCTs	Trim Shape	CRI	Trim Color
REL4	FR1 (Fire Rated)	120	S (Selectable)	RD (Round)	9 (90)	WH (White)
REL6						

Accessories
(3", 4", 6") Frame for remote driver fixtures
(4", 6") Rough-in Frame
(4", 6") Rough-in Template
(2') Extension Cable
(10') Extension Cable





### Warehouse Locations

Albuquerque, NM  
Buford, GA  
Roseville, CA



LIT-RELF-10PK  
20240705

©2024 NICOR® • ALL RIGHTS RESERVED

2200 Midtown Place NE Albuquerque, NM 87107 USA • nicorlighting.com • T. 800-821-6283 F. 800-892-8393