

REL6-UNV

Edge Lit Recessed LED Downlight - Selectable, UNV

Product Description

The REL Selectable Edge Lit Downlight with universal voltage input, offers an attractive aesthetic with a low profile in 6" round forms. The CCT selectable, edge-lit technology makes it a practical solution with high performance. Adjustable spring-loaded retention tabs allow for a secure fit and easy installation. It's perfect for adding light in commercial or multi-family spaces such as offices, hallways, corridors, and entries.

Construction

- Cast aluminum housing routes heat away from electrical components
- Edge-Lit technology allows for extremely thin fixture depth
- Adjustable, spring loaded retention tabs ensure secure fixture retention
- Off-board driver minimizes installation height and maximizes fixture life through improved heat management

Optical System

- Precision engineered optical stack creates uniform light distribution that maximizes lumen output
- Utilizes high performing LEDs with 90+ CRI and an R9 > 50
- Offered in 5 CCT selection of 2700K, 3000K, 3500K, 4000K, or 5000K

Electrical

- Input voltage of 120-277VAC
- CCT selector switch located on driver
- Dimmable to 5% with compatible phase cut or 0-10VDC dimmers.
- Operating temperature rating of -4°F to 104°F (-20°C to 40°C)

Finish

- White powder coat finish standard
- Baffle version available

Mounting and Installation

- Spring loaded retention tabs allow for easy installation into ceilings up to 3/4" thick with no need for a recessed housing
- Off-board driver/junction box includes three 1/2" KOs and three-port poke-in connectors
- Paper cutting template included
- Accessory metal rough-in template and frames available
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Listings

- cETLus 1598 Classified for wet locations
- CA Title 24 Compliant
- Certified for direct contact with insulation (IC)
- Meets Air Tight requirements per ASTM E283
- Compliant with NFPA® 70, NEC® Section 410.16 (A)(3) and 410.16 (C)(5) for closet use
- RoHS Compliant
- Meets FCC Part 15, Subpart B, Class B standards for conducted and radiated emissions
- LED lumen maintenance: L70(9k)>54,000 hrs
- LM-79, LM-80 testing performed in accordance with IESNA standards

Warranty


- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)

Project

Catalog

Type

Date

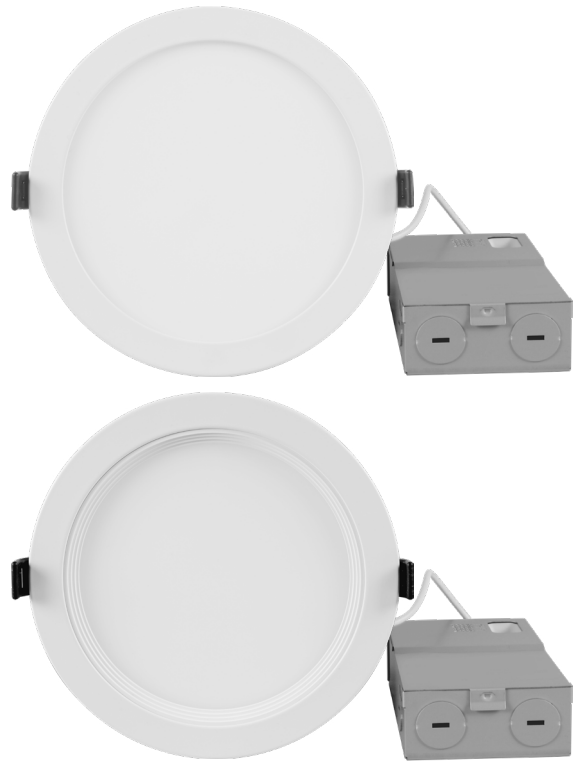

REL6-UNV
6" Edgelit LED Downlight
1000 lumen



REL6-UNV

Edge Lit Recessed LED Downlight - Selectable, UNV

Ordering

Ordering Information

Example : REL61UNVSRDWH

Series	Version	Voltage	CCT's	Trim Shape	Trim Form	Trim Color
REL6	1	UNV (120-277VAC)	S (Selectable)	RD(Round)	Blank (smooth)	WH (White)
					BF (baffled)	

Specifications and dimensions subject to change without notice

Accessories

accessories sold separately

Frame for 3", 4", 6" remote driver fixtures	MULTIFRAME-346-1
6" Rough In Flat Template	ROUGHIN-TEMPLATE-6
3", 4", 6" Rough In Flat Template	ROUGHIN-TEMPLATE-346

Performance Data and Dimming

Performance Data

Model Number	CCT	Lumens	Watts	Lumens/Watt
REL61UNVSRDWH	2700	1044	12.6	82.9
	3000	1102		87.5
	3500	1160		92.1
	4000	1169		92.8
	5000	1148		91.1

Recommended 0-10V Dimmers*

Lutron NTSTV
Lutron DVSTV
Cooper SF10P
Legrand RH4FBL3PW

Recommended Phase-Cut Dimmers*


Lutron Skylark SELV-300P
Lutron Skylark SCL-153P
Lutron DIVA DVCL-153P
Lutron DIVA DVELV-300P

*Not a complete list. Check compatibility before installation.

Photometric Data

REL6-UNV-RD 2700K

Input Voltage (VAC)	120-277
System Level Power (W)	12.6
Delivered Lumens (Lm)	1044
System Efficacy (Lm/W)	82.9
Correlated Color Temp (K)	2792
Color Rendering Index (CRI)	92 R9=54
Beam Angle (°)	110.4
Spacing Criteria	1.25



Intensity Summary (Candle Power)

Angle	Mean CP
0	374
5	373
15	361
25	330
35	293
45	245
55	189
65	129
75	69
85	17
90	0

Cone of Light Tabulation

Mounted height (Feet)	Footcandles Beam Center	Diameter (Feet)
4	23.4	11.5
6	10.4	17.3
8	5.8	23.0
10	3.7	28.8

Zonal Lumen Summary

Zone	Lumens	% of Luminaire
0-30	289	27.7%
0-40	472	45.2%
0-60	828	79.3%
0-90	1044	100%
90-180	0	0%
0-180	1044	100%


CCT Data Multiplier

3000K	1.056
3500K	1.111
4000K	1.120
5000K	1.100

REL6-UNV

Edge Lit Recessed LED Downlight - Selectable, UNV

Dimensions

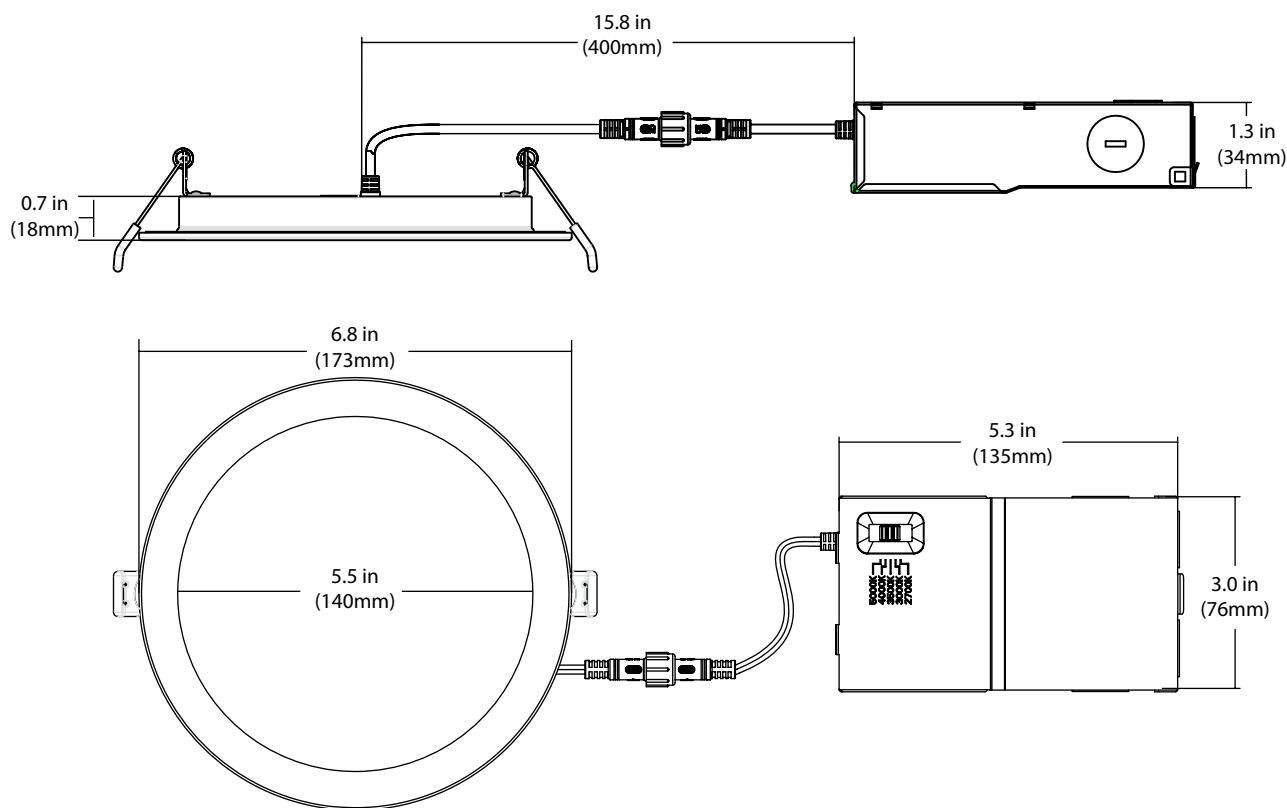

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.