



versatile™ 4C Mailbox, ADA Max Height Suite

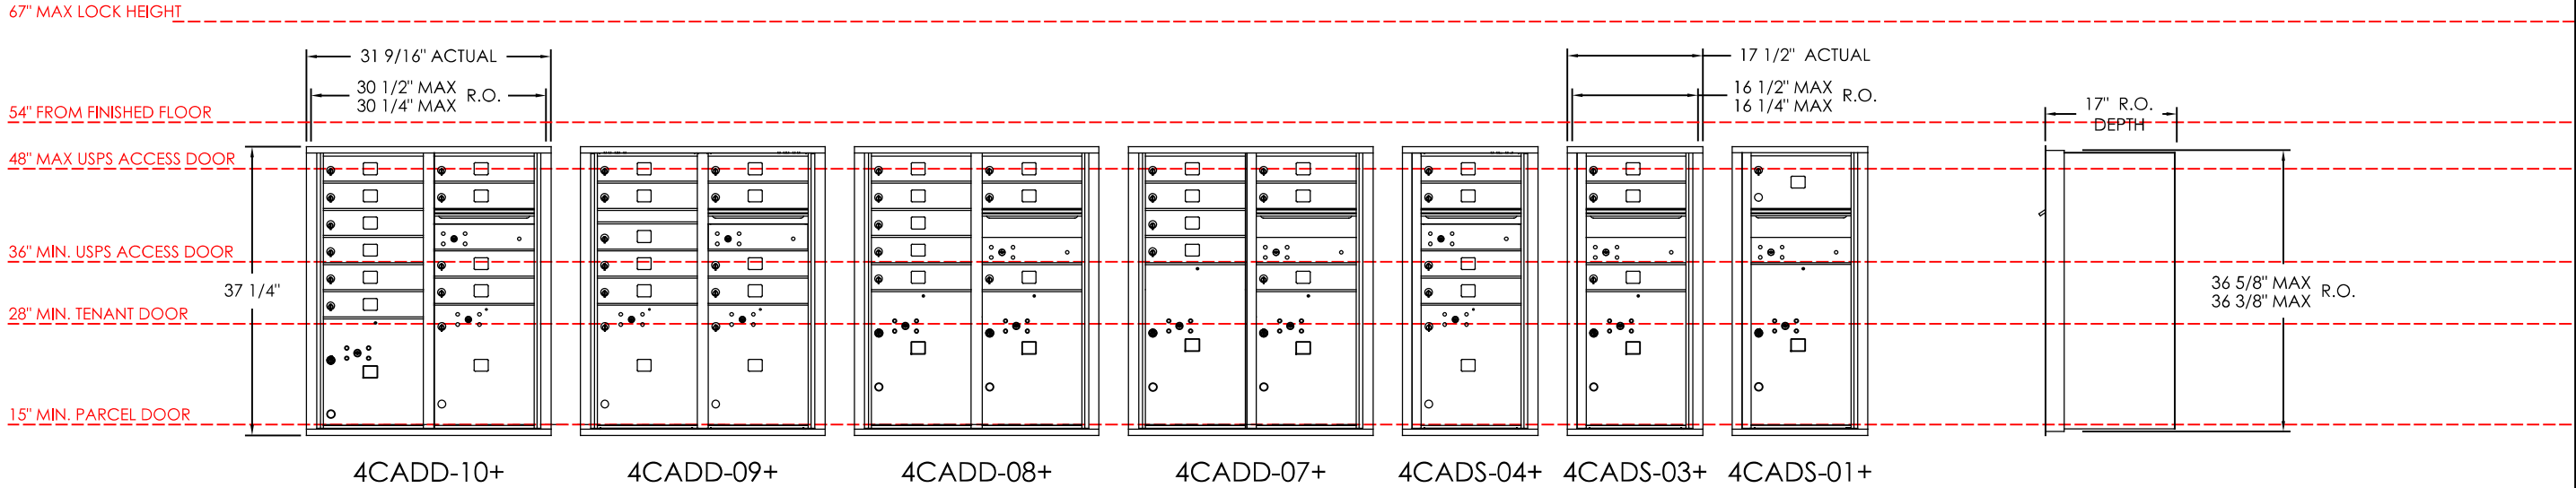

Floor

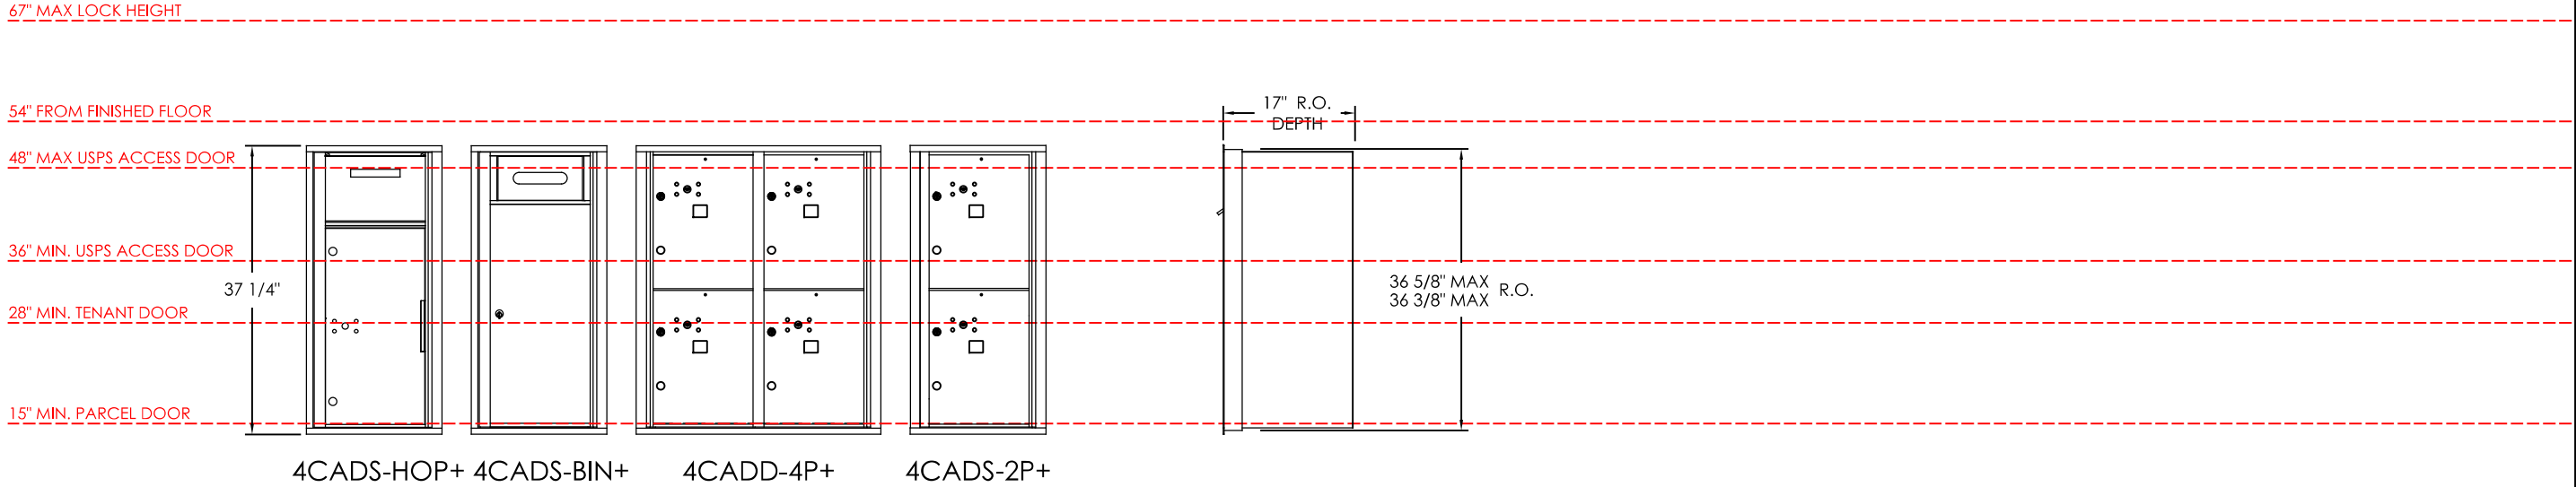

Floor

- Notes:
- Below are the USPS STD-4C installation guidelines:
 - At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
 - No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - No patron (tenant) lock shall be positioned more than 67" AFF.
 - No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - The USPS Arrow lock shall be positioned 36"- 48" AFF.
 - Modules noted with * do not meet USPS STD-4C guidelines above..
 - The rough opening width for multi-unit 4C installations is provided using the Florence configurator:
www.florencemailboxes.com/configurator.
 - Modules notes with (+) meet Fair Housing ADA installation requirements.

PRODUCT SERIES: versatile™ 4C Mailbox ADA Max Height Suite

FLORENCE CORPORATION 5935 Corporate Drive • Manhattan, KS 66503 800.275.1747 • www.florencemailboxes.com	MODEL 4CADA		REV C
	SCALE NONE	LAST REV DATE 1/6/2021	
	DRAWING NUMBER 4CADACS	DRAWN BY RAK	SHEET 1 OF 1