


versatile™ 4C Mailbox, 10 High Suite

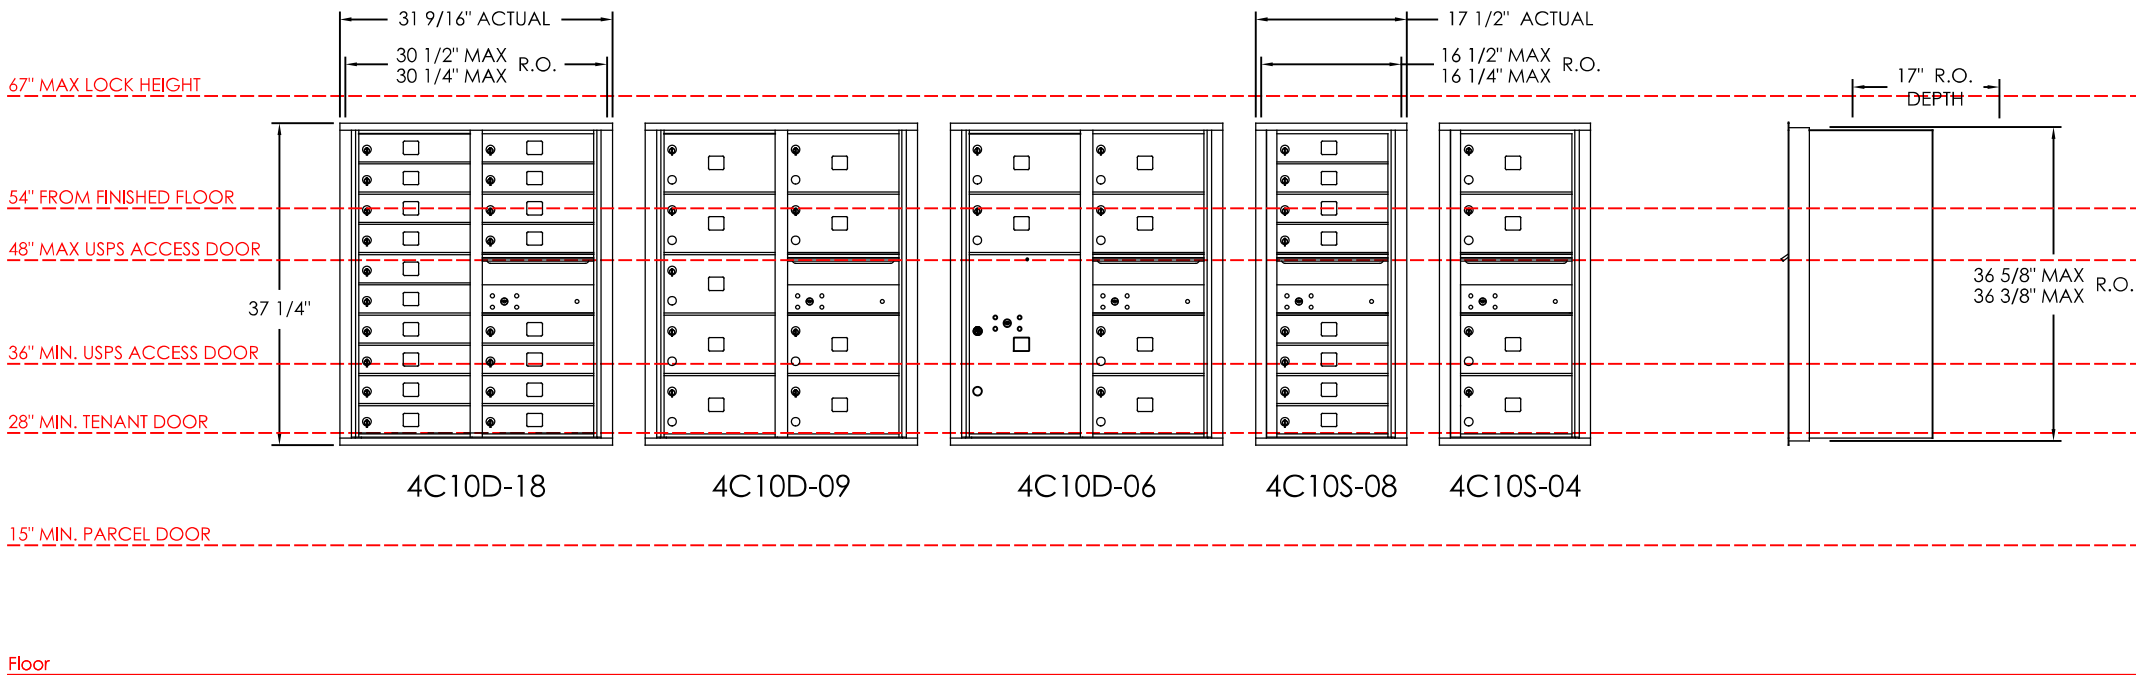

- Notes:
- Below are the USPS STD-4C installation guidelines:
 - At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
 - No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - No patron (tenant) lock shall be positioned more than 67" AFF.
 - No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - The USPS Arrow lock shall be positioned 36"- 48" AFF.
 - Modules noted with * do not meet USPS STD-4C guidelines above..
 - The rough opening width for multi-unit 4C installations is provided using the Florence configurator:
www.florencemailboxes.com/configurator.

PRODUCT SERIES: versatile™ 4C Mailbox 10 High Suite

FLORENCE
CORPORATION
5935 Corporate Drive • Manhattan, KS 66503
800.275.1747 • www.florencemailboxes.com

MODEL	4C10H	REV	C
SCALE	NONE	LAST REV DATE	1/6/2021
DRAWING NUMBER	4C10HCS	DRAWN BY	RAK
		SHEET	1 OF 1